SPECIFICATIONS

- 4" Plain End inlet/outlet, 3" Plain End vents.
- Capacities: Liquid: 110 gallons (14.7 cu.ft.); Sand: 17.5 gallons.
- Flammable liquid capacity: 87 gallons.
- Unit weight with composite cover: 130 lbs.; With cast iron cover: 188 lbs.
- Maximum operating temperature 140°F continuous.
- 6. Highway rated covers: 16,000 lb. capacity.

NOTES

- Seamless polyethylene tank.
- Unit supplied with built-in adapter for up to 6" of adjustability. Additional riser(s) available for deeper burial depth.
- Cover placement allows full access to tank for proper maintenance.
- Narrow footprint allows clearance through doorways and down stairs.
- Outlet diptube is removable to inspect/clean piping.
- 6. For on the-floor or buried applications.

ENGINEER SPECIFICATION GUIDE

Striem Flammable Liquid Interceptor model FLI-125 shall be lifetime guaranteed and made in the USA of seamless, rotationally-molded polyethylene. Interceptor shall be furnished for above or below grade installation, with field adjustable riser system, and (2) vent connections. Interceptor capacity shall be 87 gallons of flammable liquids and 17.5 gallons of sediment. Covers shall provide water/gas-tight seal and have a maximum 16,000 lbs load capacity.

OPTIONS


- **4M** 4" Male Thread Inlet / Outlet
- 6P 6" Plain End Inlet / Outlet
- **6M** 6" Male Thread Inlet / Outlet
- **CC24** Integral Membrane Clamping Collar Kit
- C24-HP H20 Rated Pickable Cast Iron Cover
- AK1 High Water Anchor Kit

TeleGlide RISER OPTIONS

- **SR24** >6"-24"
- **LR24** >24"-39"
- SR24 (2) >39"-43"
- **SR24** + **LR24** >43"-58"
- **LR24** (2) >58"-72"


Signature of Approval:	
Company:	
Date of Approval:	
Specifying Engineer:	
Engineering Firm:	

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS

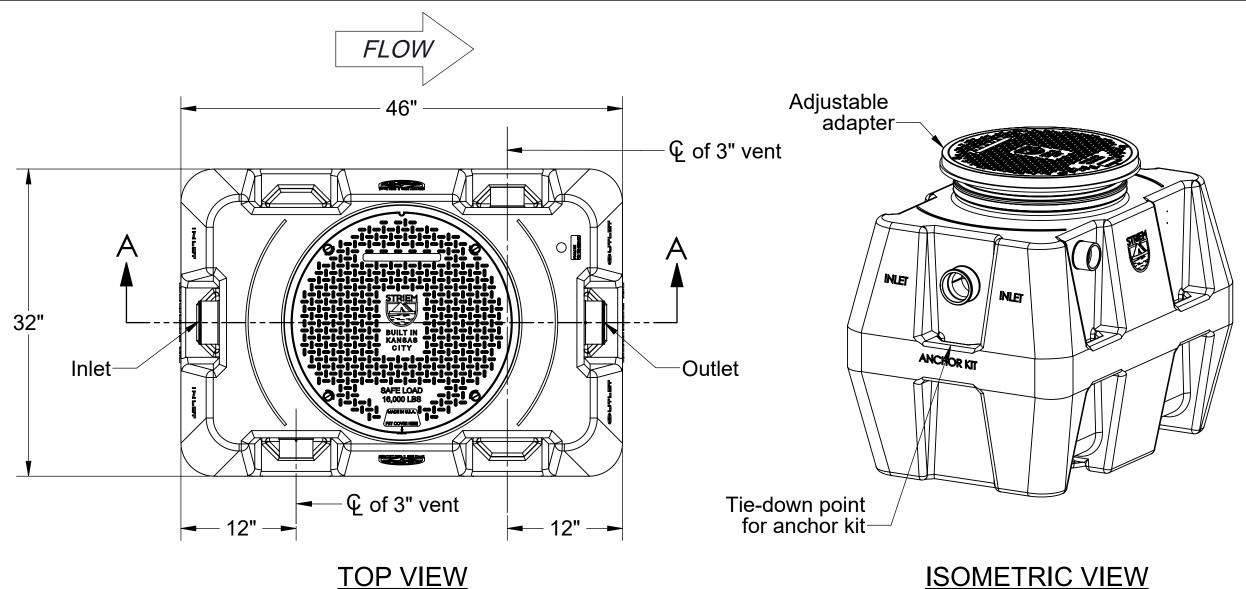

ISOMETRIC VIEW

Finished Grade

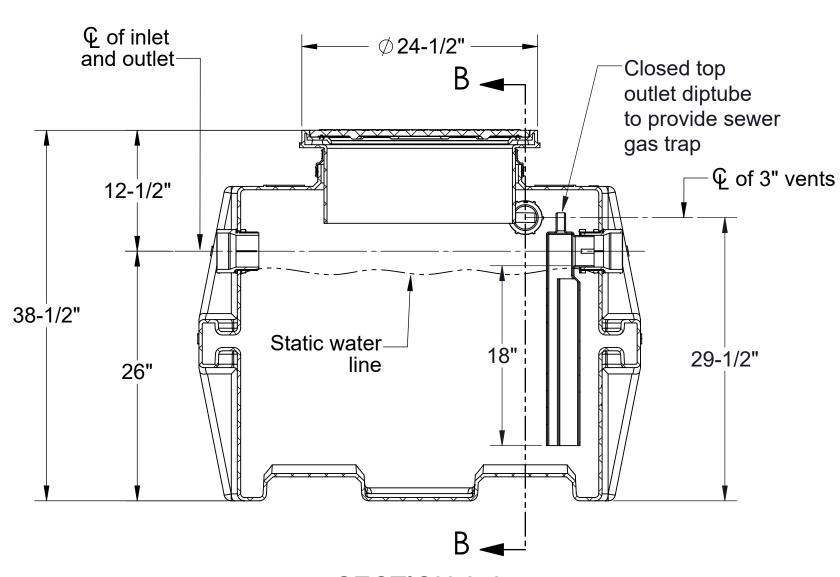

See order guide to determine riser quantity 3/4" Vent Invert above topof inlet

SECTION A-A

SECTION B-B

MODEL NUMBER:

FLI-125

110 GALLON POLYETHYLENE FLAMMABLE LIQUID INTERCEPTOR, UNRATED

DWG BY: RS

DESCRIPTION:

DATE:

6/8/20

REV: 0 **ECO**:

SPECIFICATION SHEET

Striem 3100 Brinkerhoff Kansas City, KS 66115 Tel: 913-222-1500

Fax: 913-291-0457 www.striemco.com Made in the U.S.A

