



SPECIFICATION & SUBMITTAL SHEET
MODEL: AA-M
MEDIUM BASKET-STYLE SOLIDS INTERCEPTOR

AARDVARK™ SERIES


TOP VIEW

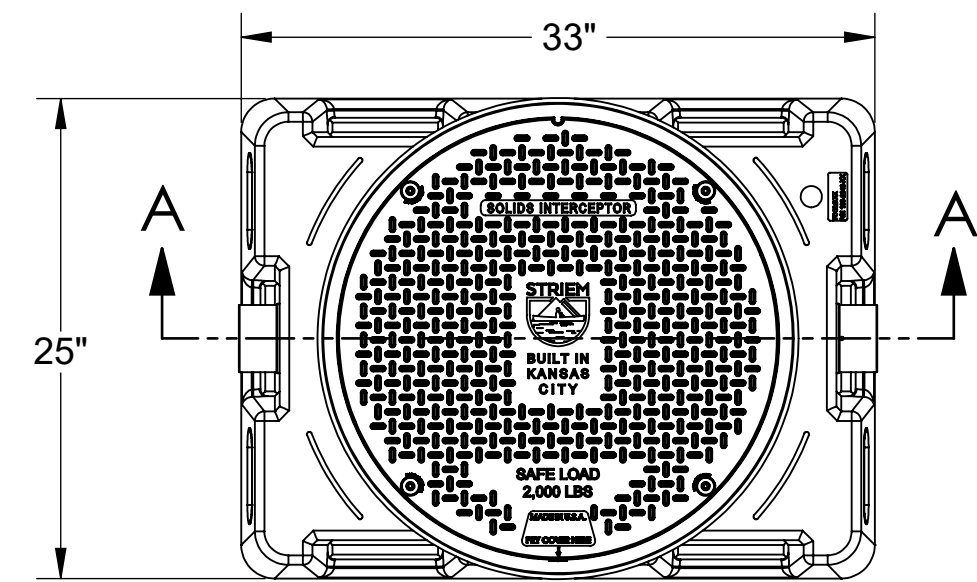

SECTION "A-A"

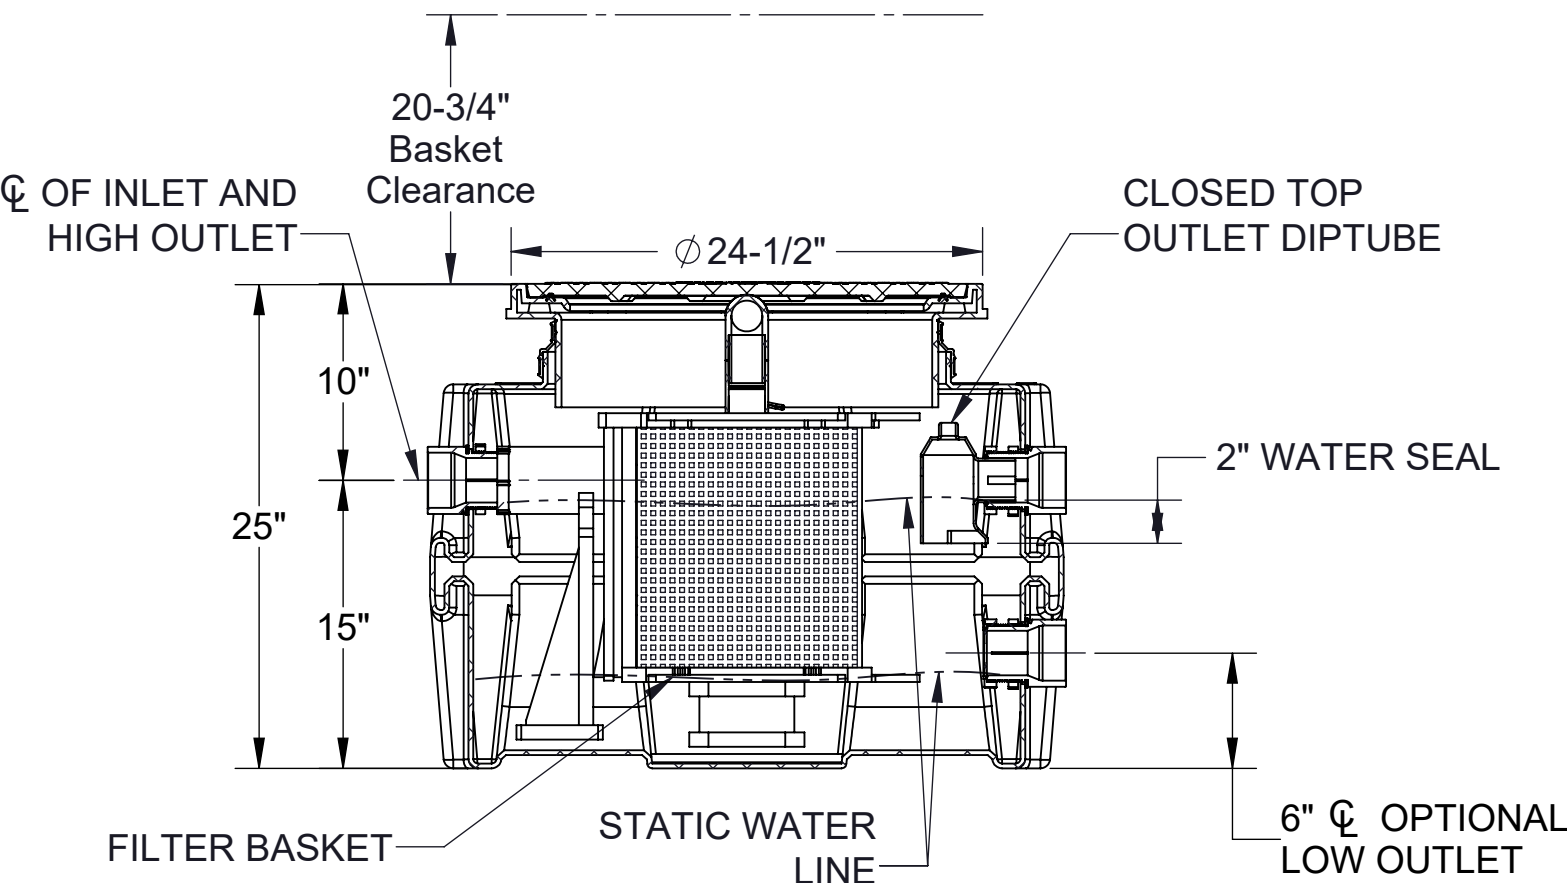

ISOMETRIC VIEW

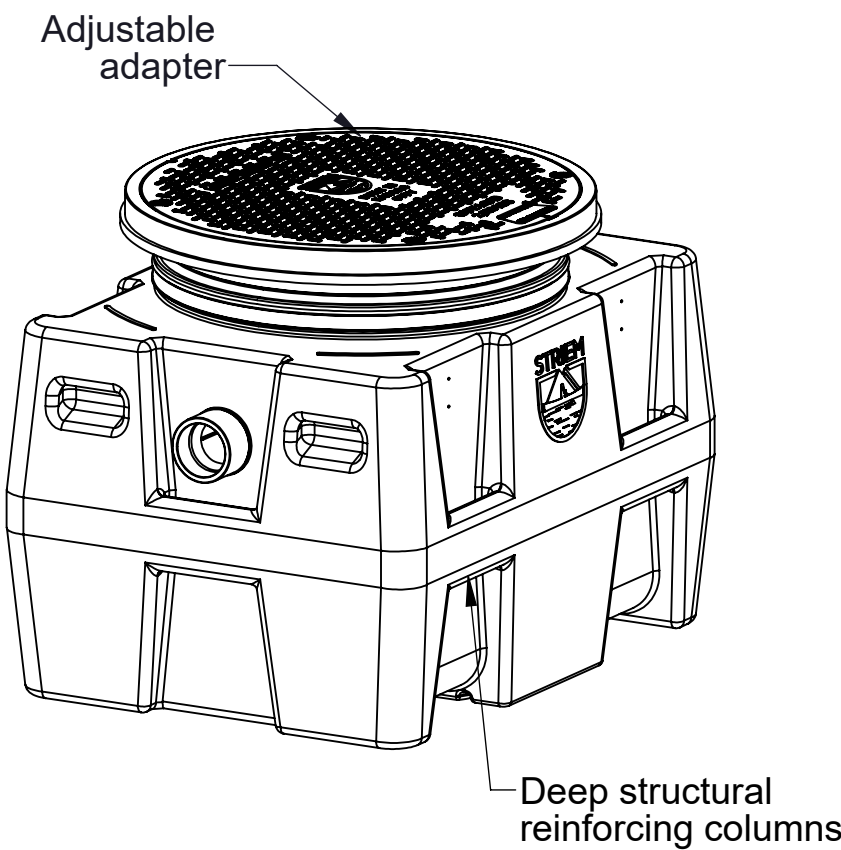

OPTIONS

- 3M - 3" Male Thread Connections
4P - 4" Plain End SCH.40 Connections*
4M - 4" Male Thread Connections*
CC24 - Integral Membrane Clamping Collar Kit
SR-24 - Short Riser
LR-24 - Long Riser

* Optional sewer gas trap not compatible with low outlet if 4" connections are selected.

Table with 2 columns: DESIRED DEPTH, REQUIRED RISER. Rows show depth ranges (0"-3-1/2", >3-1/2"-22", >22"-37") and corresponding riser requirements (Included, (1) SR-24, (1) LR-24).

STANDARD SPECS

- CONNECTIONS: 3" SCH. 40 Plain End Connections
LIQUID CAPACITY: With high outlet: 38 gal. With low outlet: 12 gal.
SOLIDS CAPACITY: 6 gal.
FLOW RATE: 50 gpm.
WEIGHT: 83 lbs.
INSTALLATION: Above or below grade.
SEWER GAS TRAP: 2".
COVER LOAD CAPACITY: 2,000 lbs.
MAXIMUM CONTINUOUS OPERATING TEMPERATURE: 140°.
WALL THICKNESS: 3/8".
TANK MATERIAL: Polyethylene.
SCREEN PERFORATIONS: 0.125" Diameter.

INNOVATIONS

- 1 Removable basket interlocks with inlet: prevents solids from escaping basket.
2 UNI-FIT™: basket inserts in one orientation.
3 All-perforated basket: basket perforations are more than 24 times inlet opening...
4 Optional low outlet: if used, it allows for a temporary water surge...
5 Movable trap: sewer gas trap can be field-installed on high or low outlet.

ENGINEER SPECIFICATION GUIDE

Striem Aardvark™ solids interceptor model AA-M shall be lifetime guaranteed and made in the USA. Tank material shall be polyethylene. Interceptor shall have removable, corrosion-resistant filter basket...

Signature of Approval: _____
Company: _____
Date of Approval: _____
Specifying Engineer: _____
Engineering Firm: _____



3100 Brinkerhoff
Kansas City, KS 66115
PH 913-222-1500
FX 913-291-0457
STRIEMCO.COM



MADE IN THE U.S.A.
LIFETIME GUARANTEED