

SPECIFICATIONS

- 1. 6" Plain End inlet/outlets.
- 2. Max flow rate: 150 GPM.
- 3. Liquids Capacity with high outlet: 104 gal.
- 4. Liquids Capacity with low outlet: 15 gal.
- 5. Solids Capacity: 10 gal.
- 6. Screen Perforations: 1/8" diameter.
- 7. Unit weight w/std. covers: 143 lbs.
- 8. Highway rated composite cover: 16,000 lbs. capacity.
- 9. Maximum operating temperature: 140°F continuous.

NOTES

- 1. Seamless medium density polyethylene 3/8" wall tank.
- 2. Cover placement allows full access to tank for proper maintenance.
- 3. For on the-floor or buried applications.

INNOVATIONS

- 1. **Removable basket interlocks with inlet:** prevents solids from escaping basket.
- 2. **UNI-FIT™:** basket inserts in one orientation.
- 3. **All-perforated basket:** basket perforations are more than 11 times inlet opening, creating easy flow in the presence of solids, and limiting the chance for a backup.
- 4. **Optional low outlet:** if used, it allows for a temporary water surge (acts as a reservoir), as well as keeps basket dry during maintenance.

ENGINEER SPECIFICATION GUIDE

Striem Aardvark™ solids interceptor model AA-XL-6 shall be lifetime guaranteed and made in the USA. Tank material shall be polyethylene. Interceptor shall have removable, corrosion-resistant filter basket. Interceptor shall be equipped with high or low outlet option, with a sewer gas trap to be located on either outlet. Interceptor shall be furnished for above- or below-grade installation. Cover shall be water and gas tight with a minimum 16,000 lbs load capacity. Interceptor shall be certified to IAPMO IGC 167-2011ae2.

OPTIONS

- ☐ **HO** - High Outlet Option*
- ☐ **LO** - Low Outlet Option*
- ☐ **CC24** - Integral Membrane Clamping Collar Kit
- ☐ **C24-HP** - H20 Rated Pickable cast iron cover

*With 6" options, only the high or low outlet will be installed at factory.

TeleGlide RISER OPTIONS

- ☐ **SR24** - >6"-24"
- ☐ **LR24** - >24"-39"
- ☐ **SR24 (2)** - >39"-43"
- ☐ **LR24 + SR24** - >43"-58"
- ☐ **LR24 (2)** - >58"-72"

Signature of Approval: _____


Company: _____

Date of Approval: _____


Specifying Engineer: _____

Engineering Firm: _____


US Patent No.
US10786761B2




PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

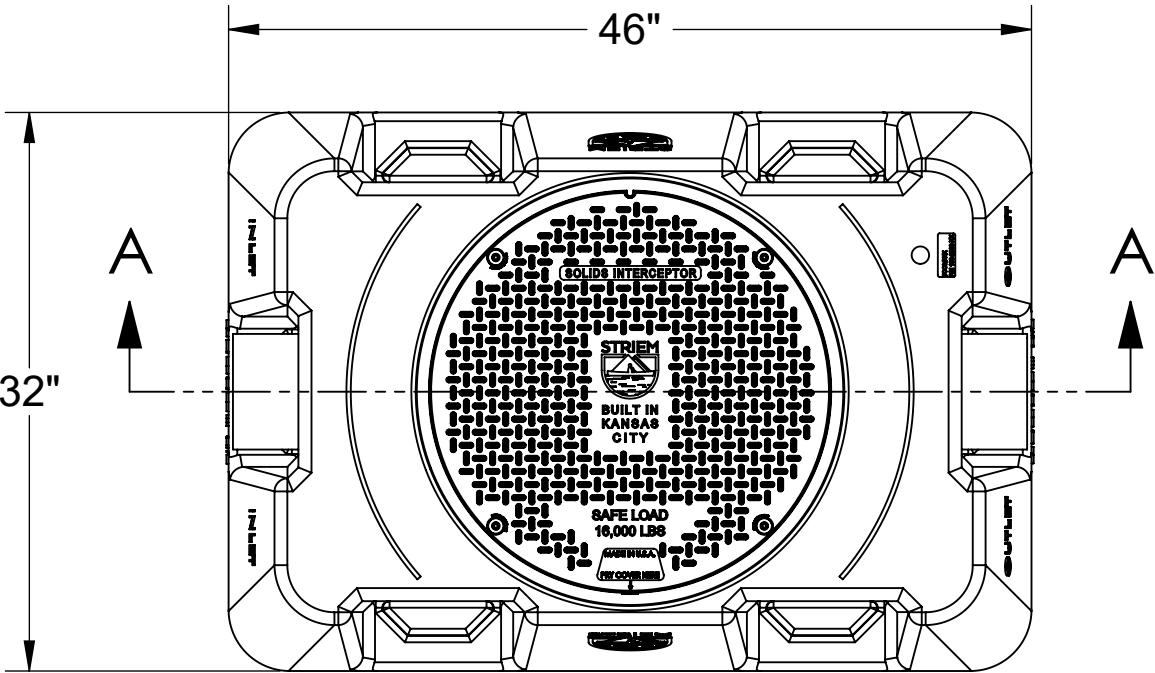


TOP VIEW

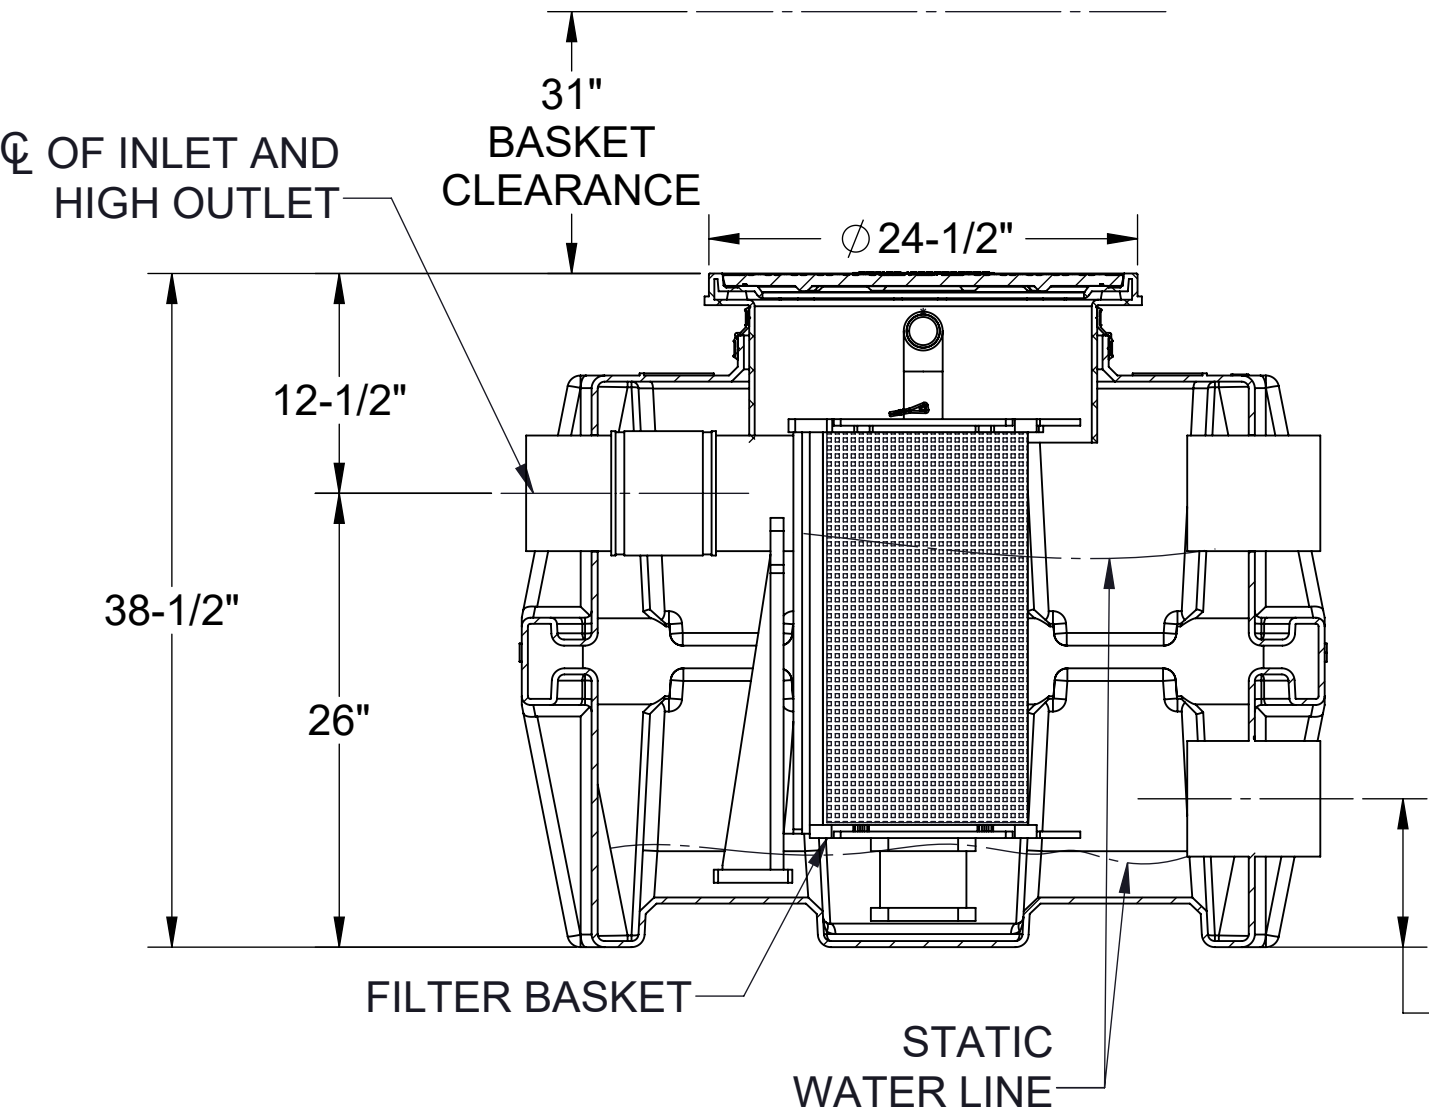

SECTION "A-A"

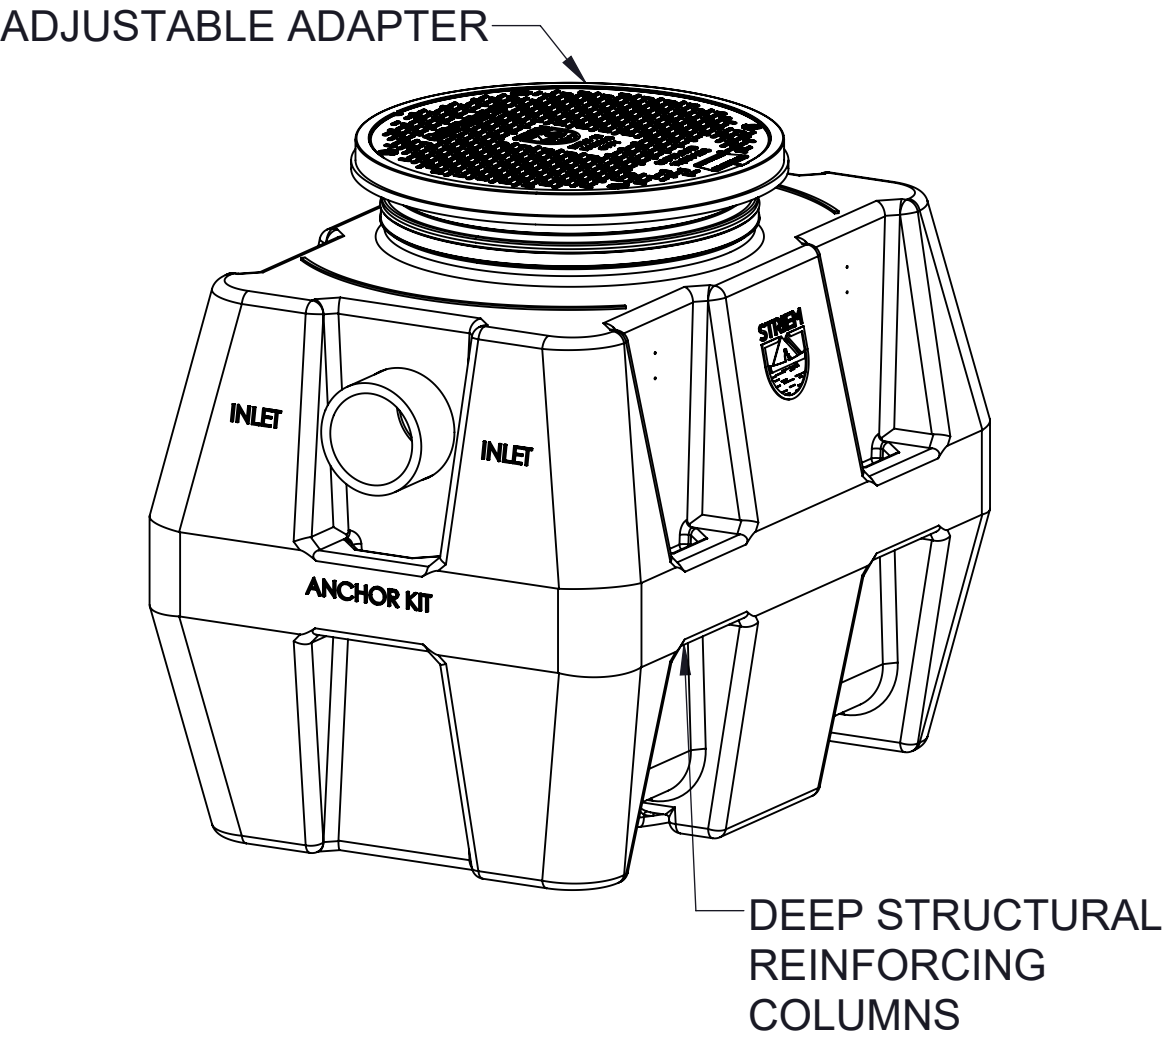

ISOMETRIC VIEW

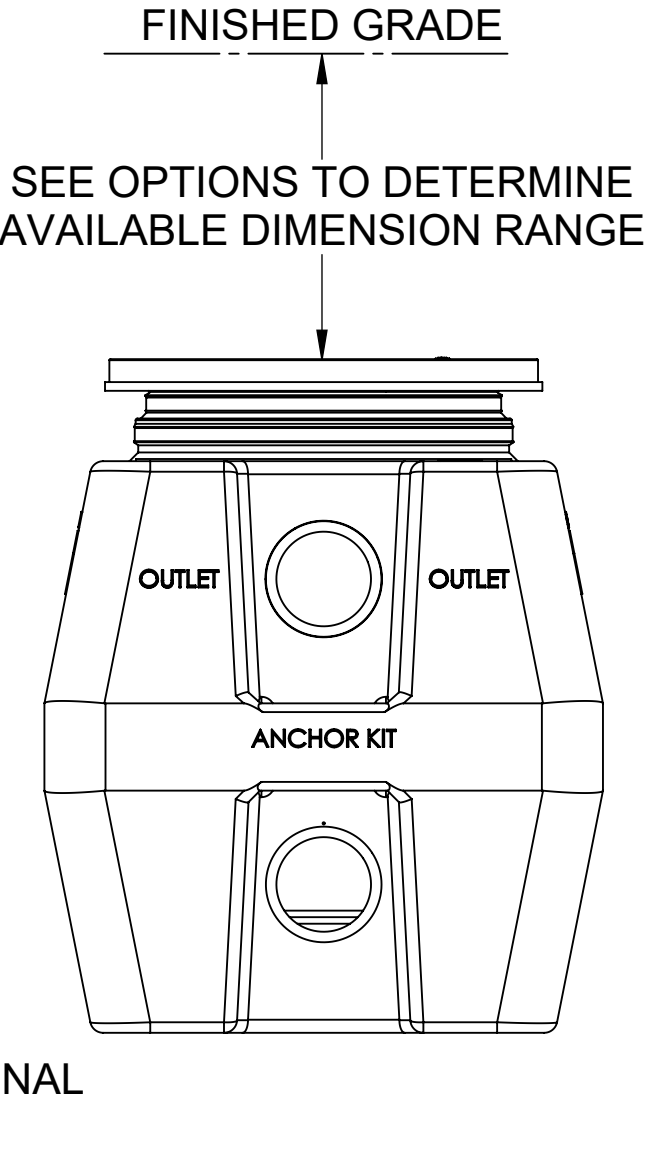

OUTLET END VIEW

MODEL NUMBER: AA-XL-6	
DESCRIPTION: AARDVARK™ EXTRA LARGE BASKET-STYLE SOLIDS INTERCEPTOR	
DWG BY: MJ	DATE: 12/16/2020 REV: 0 ECO:

SPECIFICATION SHEET

Striem
3100 Brinkerhoff
Kansas City, KS 66115
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A