

**SPECIFICATIONS**


1. Liquid holding capacity: 15 Gallons
2. Unit weight w/std. cover: 28 Pounds
3. Composite cover: 2,000 lb capacity (standard).
4. Maximum operating temperature 140°F continuous.

**NOTES**


1. For gravity drainage applications only. Do not use for pressure applications.
2. 3/8" thick seamless medium density polyethylene walls.
3. Cover placement allows full access to tank for proper maintenance.
4. Engineered inlet diffuser is removable to inspect/clean piping.
5. For on the-floor or buried applications.

**ENGINEER SPECIFICATION GUIDE**


Striem Lab Basin™ neutralization tank model LB-15 shall be lifetime guaranteed and Made in USA of seamless, rotationally-molded polyethylene with minimum 3/8" uniform wall thickness. Tank shall be furnished with inlets, outlets, (2) vent connections, cover, riser system, monitoring equipment and other modifications per jobsite-specific conditions and per engineer's specification.

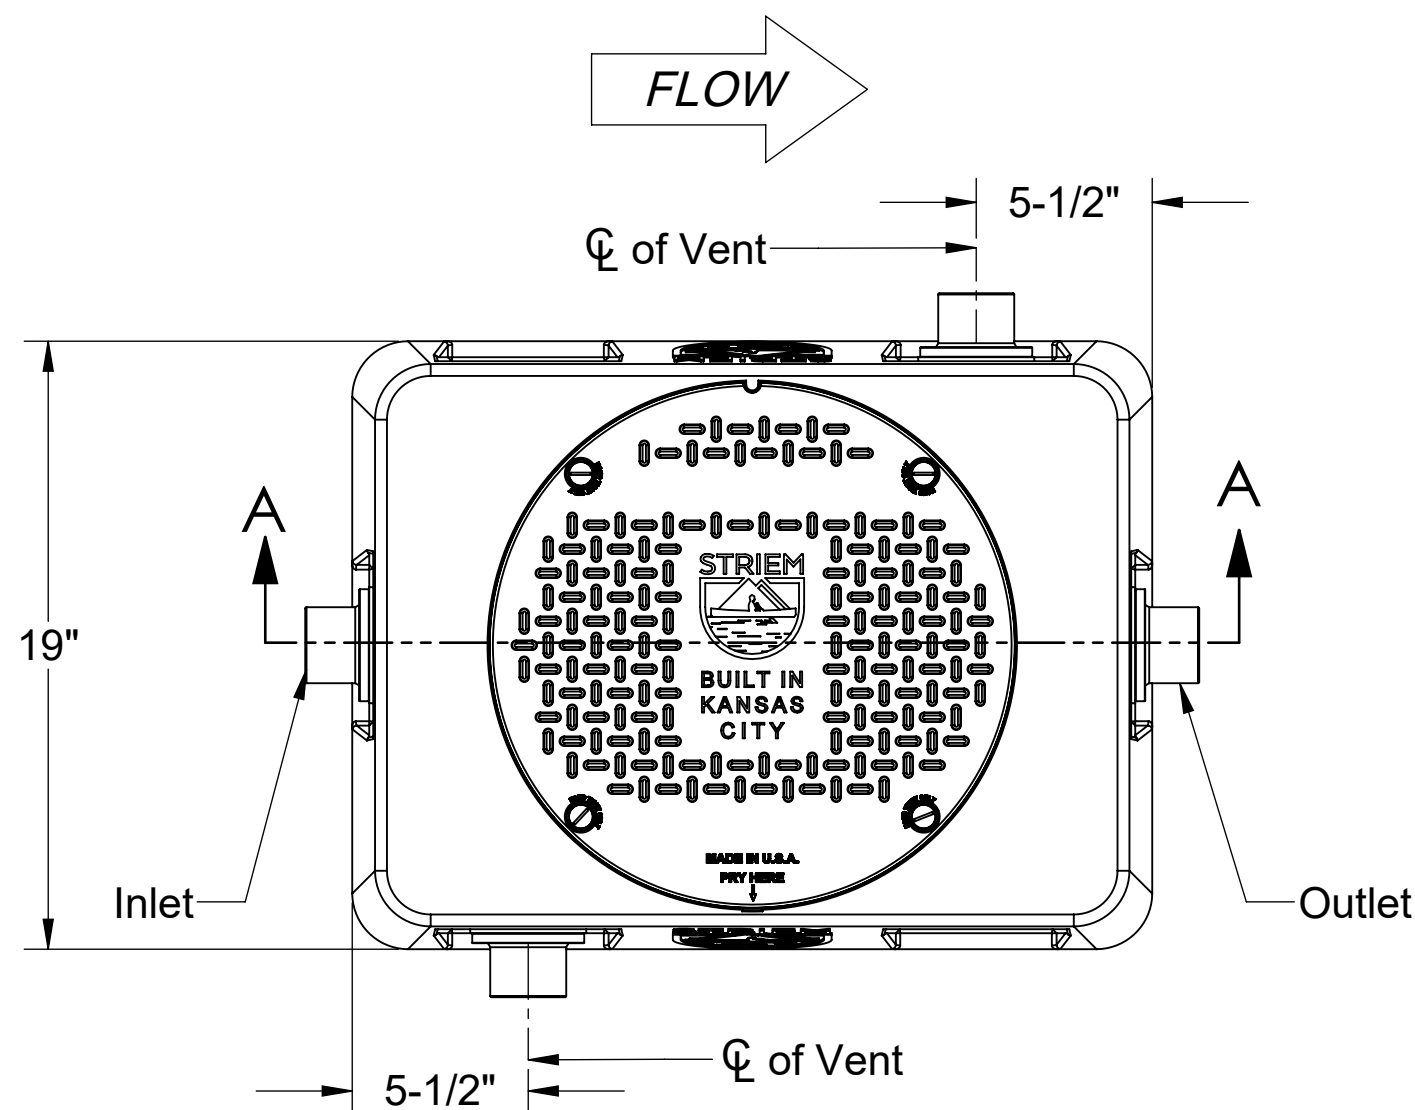

**TOP VIEW**

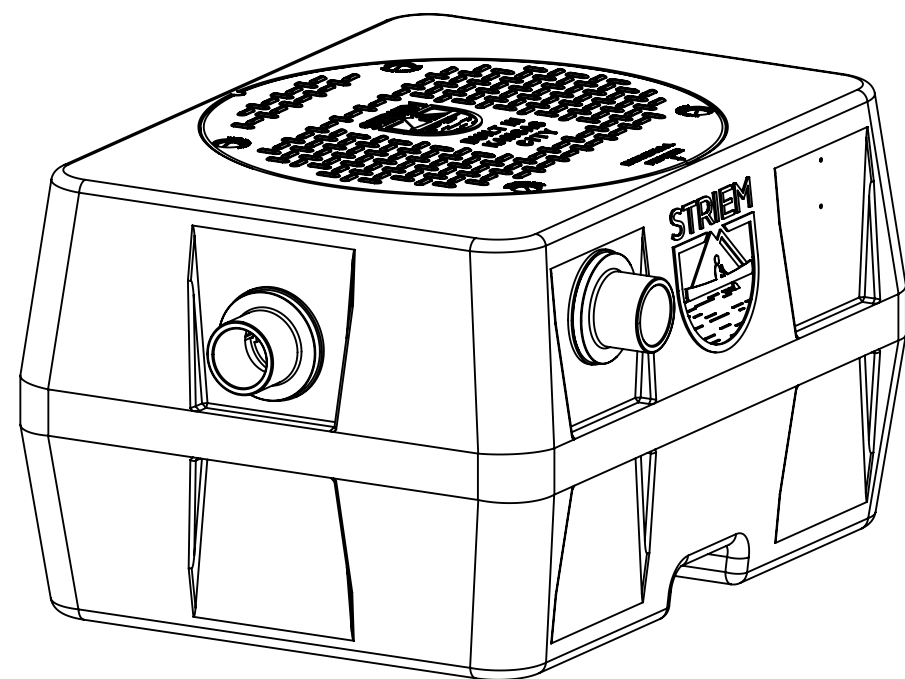

Closed top inlet diffuser to provide sewer gas trap

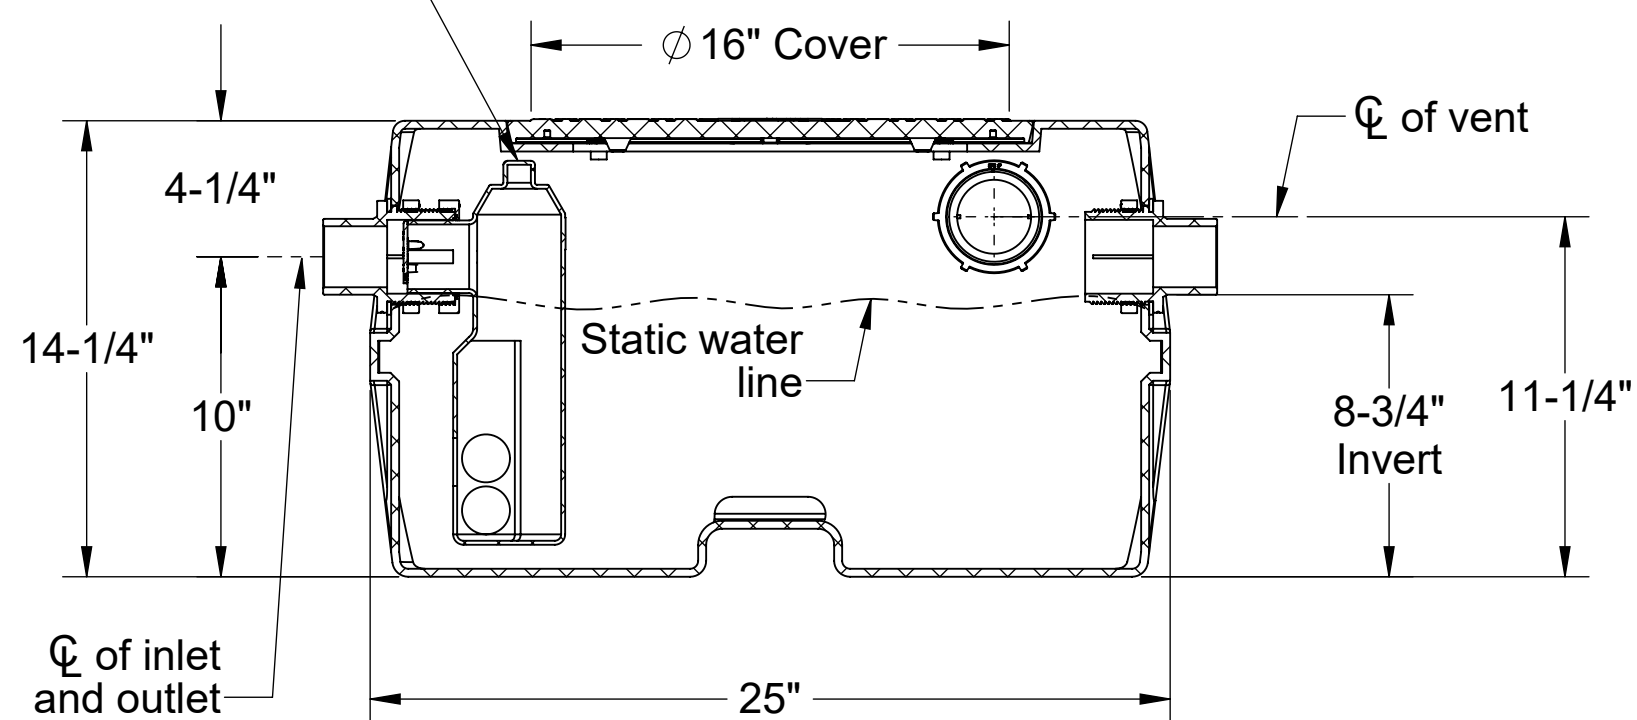

**SECTION "A-A"**

**Directions:** Complete steps 1-3 and submit signed with purchase order.

**1. Choose Connection Types.**

- |  |                             |
|--|-----------------------------|
| <b>Inlet / Outlet</b>                  | <b>Size</b>                 |
| <input type="checkbox"/> Plain End     | <input type="checkbox"/> 2" |
| <input type="checkbox"/> Female Thread | <input type="checkbox"/> 3" |
| <input type="checkbox"/> Flanged       |                             |

- |             |                             |
|-------------|-----------------------------|
| <b>Vent</b> | <b>Size</b>                 |
| Plain End   | <input type="checkbox"/> 2" |
|             | <input type="checkbox"/> 3" |

**2. Diptube Location.**

- Diptube at:  Inlet  Outlet  Both (Ohio Code)  
(Provided on inlet if not specified)

**3. Additional Options.**

- SR16** - 2-1/8"-16" 16 Series Riser
- CC-1** - Command Center pH Monitoring Package
  - SPK-A** - Above Grade Sensor Placement Kit\*
  - SPK-B** - Below Grade Sensor Placement Kit\*
- 90%+ Calcium Carbonate Limestone (200 lbs.)

\*Required with CC-1

Signature of Approval: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Date of Approval: \_\_\_\_\_  
 Specifying Engineer: \_\_\_\_\_  
 Engineering Firm: \_\_\_\_\_

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

<b>MODEL NUMBER:</b> LB-15	
<b>DESCRIPTION:</b> LAB BASIN SERIES POLYETHYLENE CHEMICAL WASTE TANK	
<b>DWG BY:</b> RS	<b>DATE:</b> 10/6/20
<b>REV:</b> 02	<b>ECO:</b>

**SPECIFICATION SHEET**

**Striem**  
 3100 Brinkerhoff  
 Kansas City, KS 66115  
 Tel: 913-222-1500  
 Fax: 913-291-0457  
 www.striemco.com

Made in the U.S.A

