
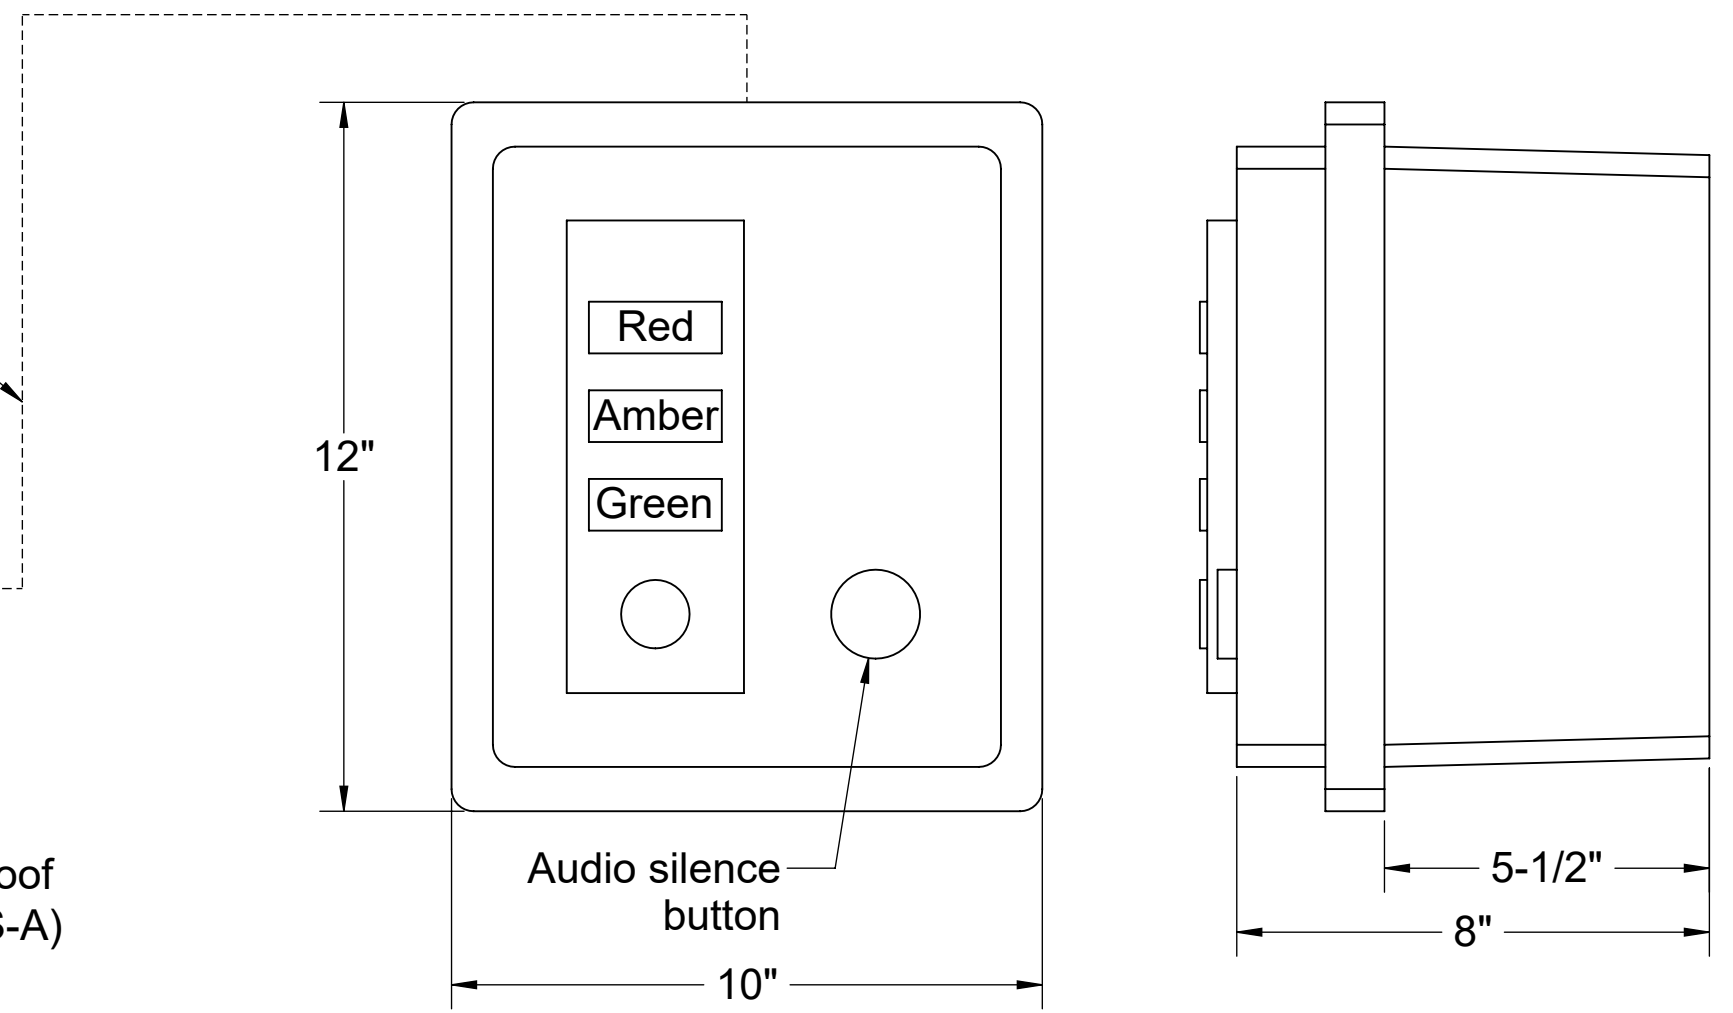


SPECIFICATIONS

1. Manufactured using UL listed components.
2. Power requirement 120 VAC for DC supply.
3. 24 VDC for float switches and enunciator.
4. Operating temperature for panel 32-140 °F.
5. Float switch to be mounted per installation instructions.
6. NEMA 4X fiberglass, corrosion-resistant, weatherproof enclosure suitable for outdoor use and damp environments.
7. NEMA 4X alarm buzzer, 95dB @ 2' (0.6 meters).
8. Unit comes supplied with extra dry contact for connection to a building alarm system.

ENGINEER SPECIFICATION GUIDE

Multi-level audio/visual alarm shall be as manufactured by Striem, LLC. Alarm panel to be UL listed components contained inside a NEMA 4X Enclosure. Alarm panel to be wired to a type 304 stainless steel explosion proof multi-level switch for multiple level monitoring.

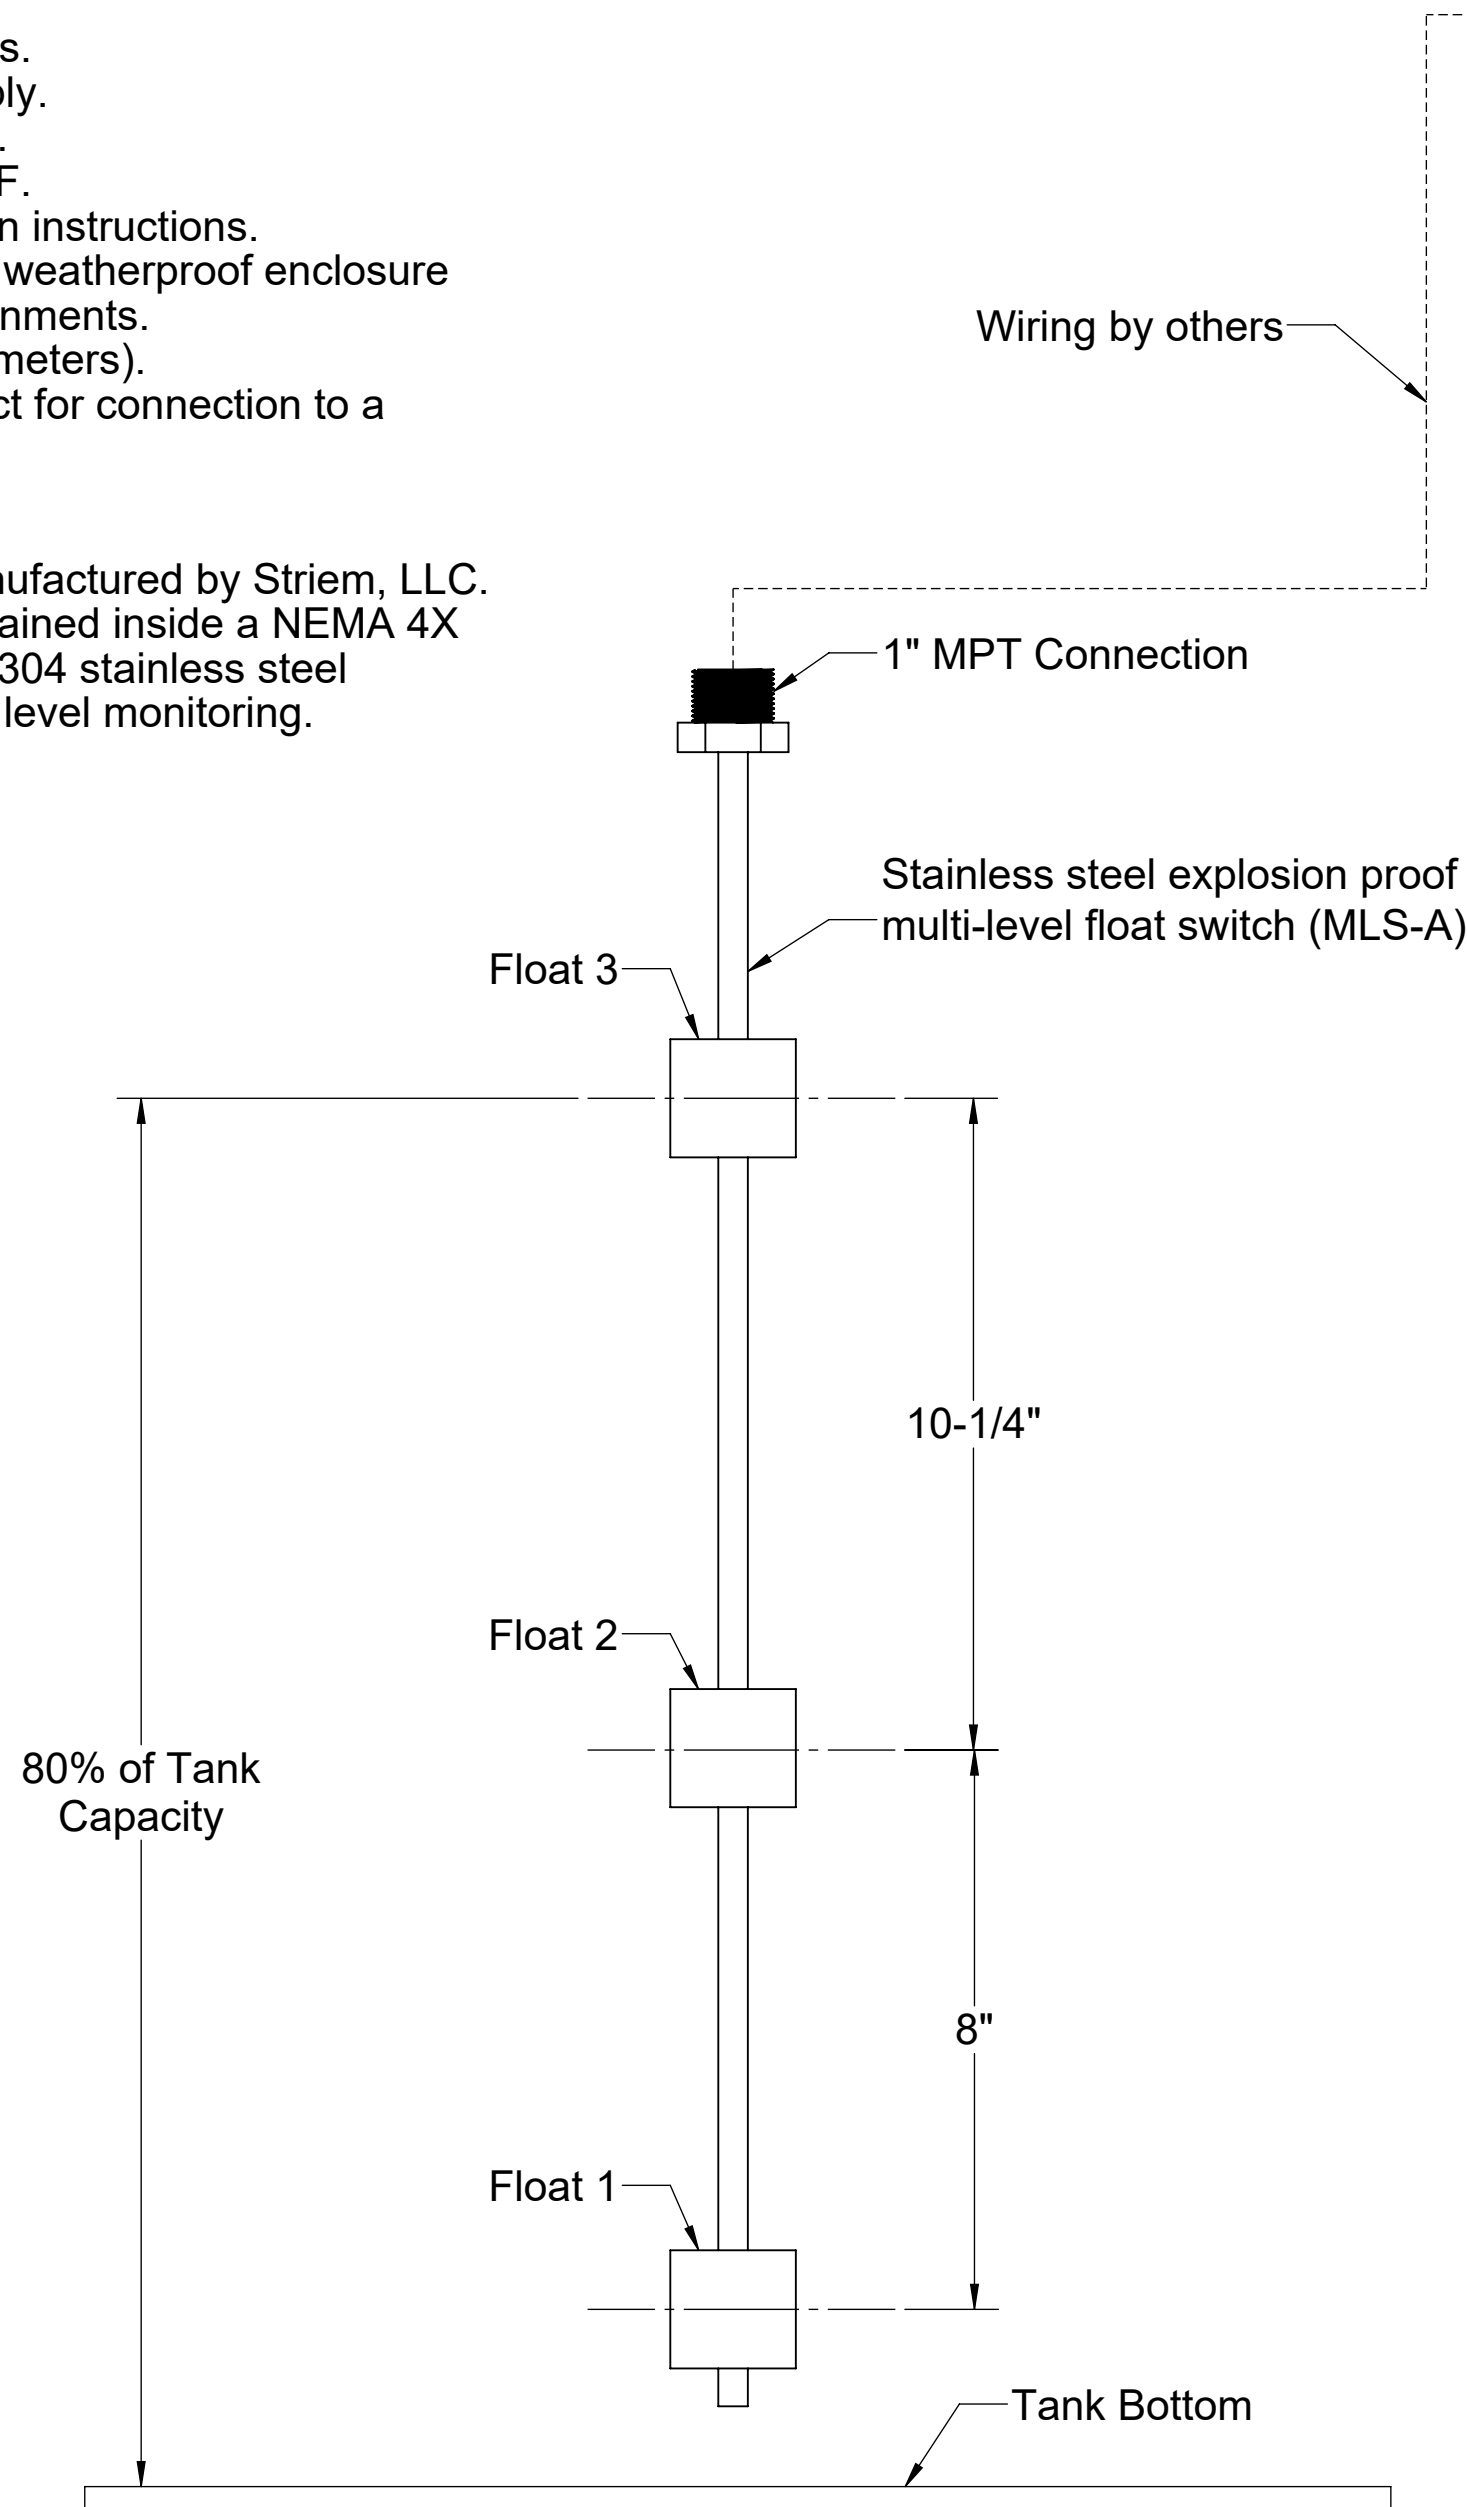

Signature: _____
 Date: _____
 Company: _____
 Project: _____

MODEL NUMBER:	AVA-4
DESCRIPTION:	MULTI-LEVEL MONITOR REMOTE AUDIO VISUAL ALARM
DWG BY:	ENG
DATE:	6/22/2023
REV:	1

SPECIFICATION SHEET

Striem
 Kansas City, KS
 Tel: 913-222-1500
 orders@striemco.com
 www.striemco.com

Made in the U.S.A

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.