SPECIFICATIONS


- 1. 6" Plain End inlet shown, 3" Plain End vents standard.
- Liquid holding capacity: 1500 gallons (201 cu. ft.). 2.
- 3. Unit weight: 1496 lbs.
- 4. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Lifting lug set for easy install.

ENGINEER SPECIFICATION GUIDE

Striem decontamination tank model BB-1500 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene with 7/8" nominal wall thickness. Tank shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Tank liquid holding capacity shall be 1500 gallons. Covers shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

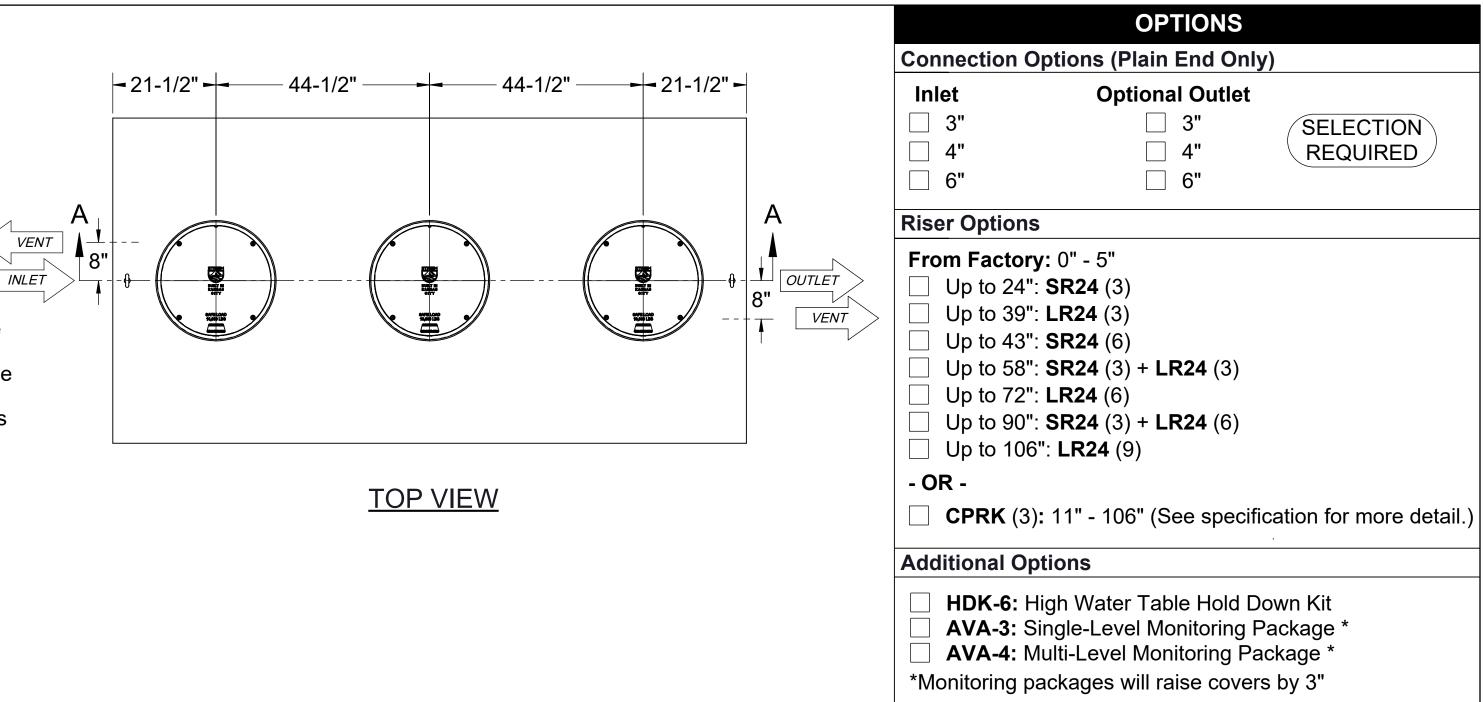



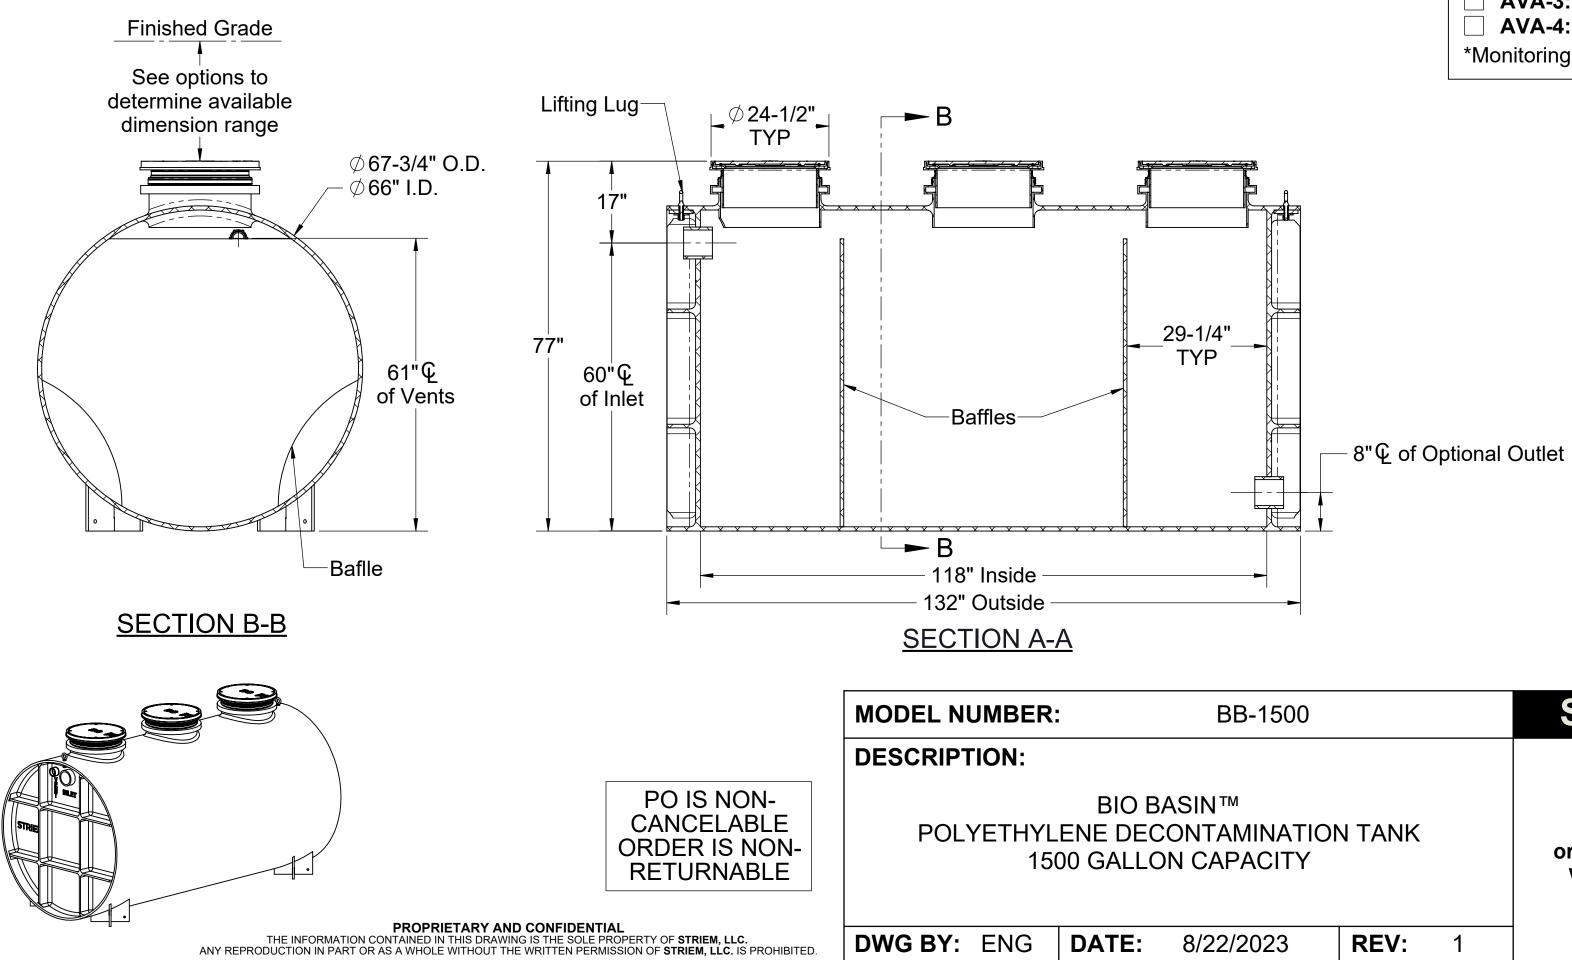

BB-1500		SPECIFICATION SHEET		
D BASIN™ ECONTAMINATION TANK LON CAPACITY			Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com Made in the U.S.A	STRIEM
: 8/22/2023	REV:	1		