

SPECIFICATIONS


- 1. 4" Plain End inlet/outlet standard.
- 2. Liquid capacity: 57 Gallons.
- 3. Solids capacity: 25 Gallons.
- 4. Basket capacity: 7 Gallons.
- 5. Unit weight: 200 lbs.
- 6. Maximum operating temperature 140 °F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Narrow footprint allows clearance through doorways and down stairs.
- 5. Diptube is removable to inspect or clean piping.
- 6. Maximum burial depth: 36" from standard cover height.

ENGINEER SPECIFICATION GUIDE


Striem solids interceptor model CB-50-G shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Interceptor liquid holding capacity shall be 57 gallons. Interceptor solids capacity shall be 25 gallons. BCB-7 basket solids capacity shall be 7 gallons. Cover shall be H20 traffic-rated cast iron grate.

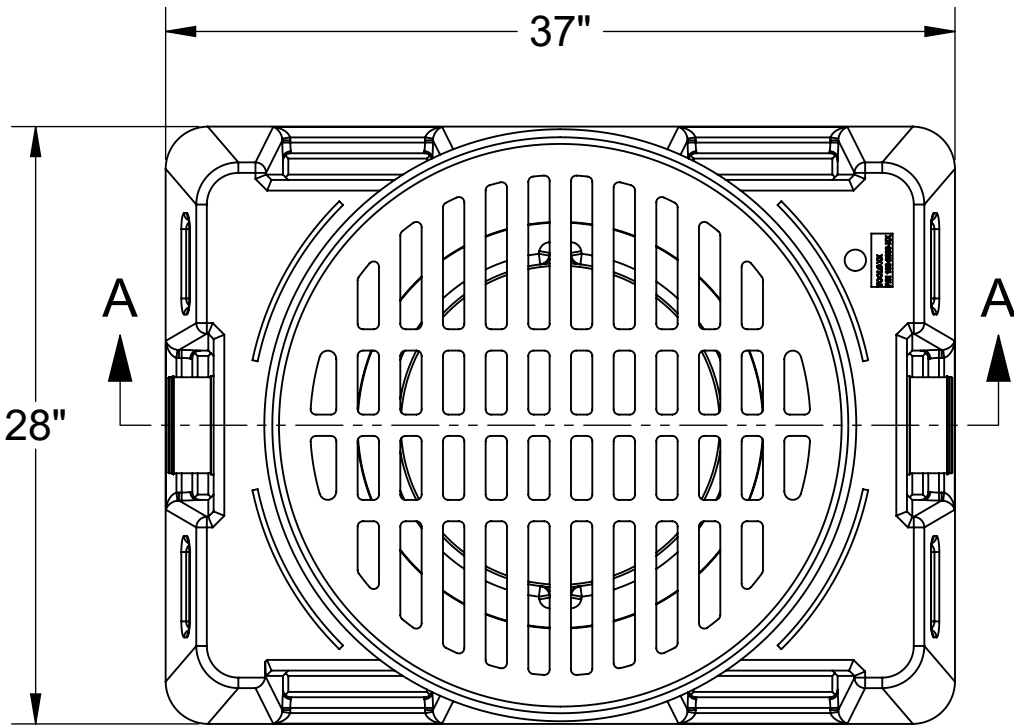


TOP VIEW

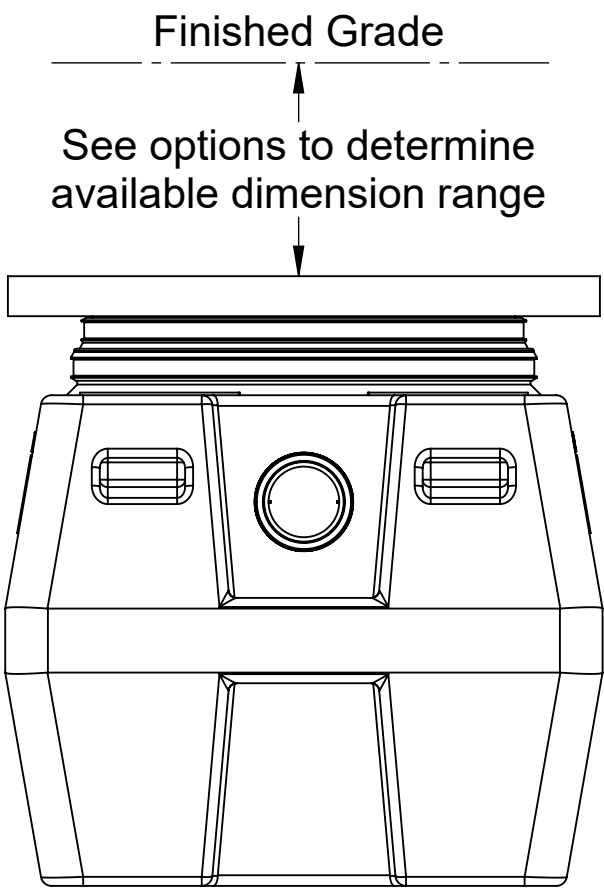

END VIEW

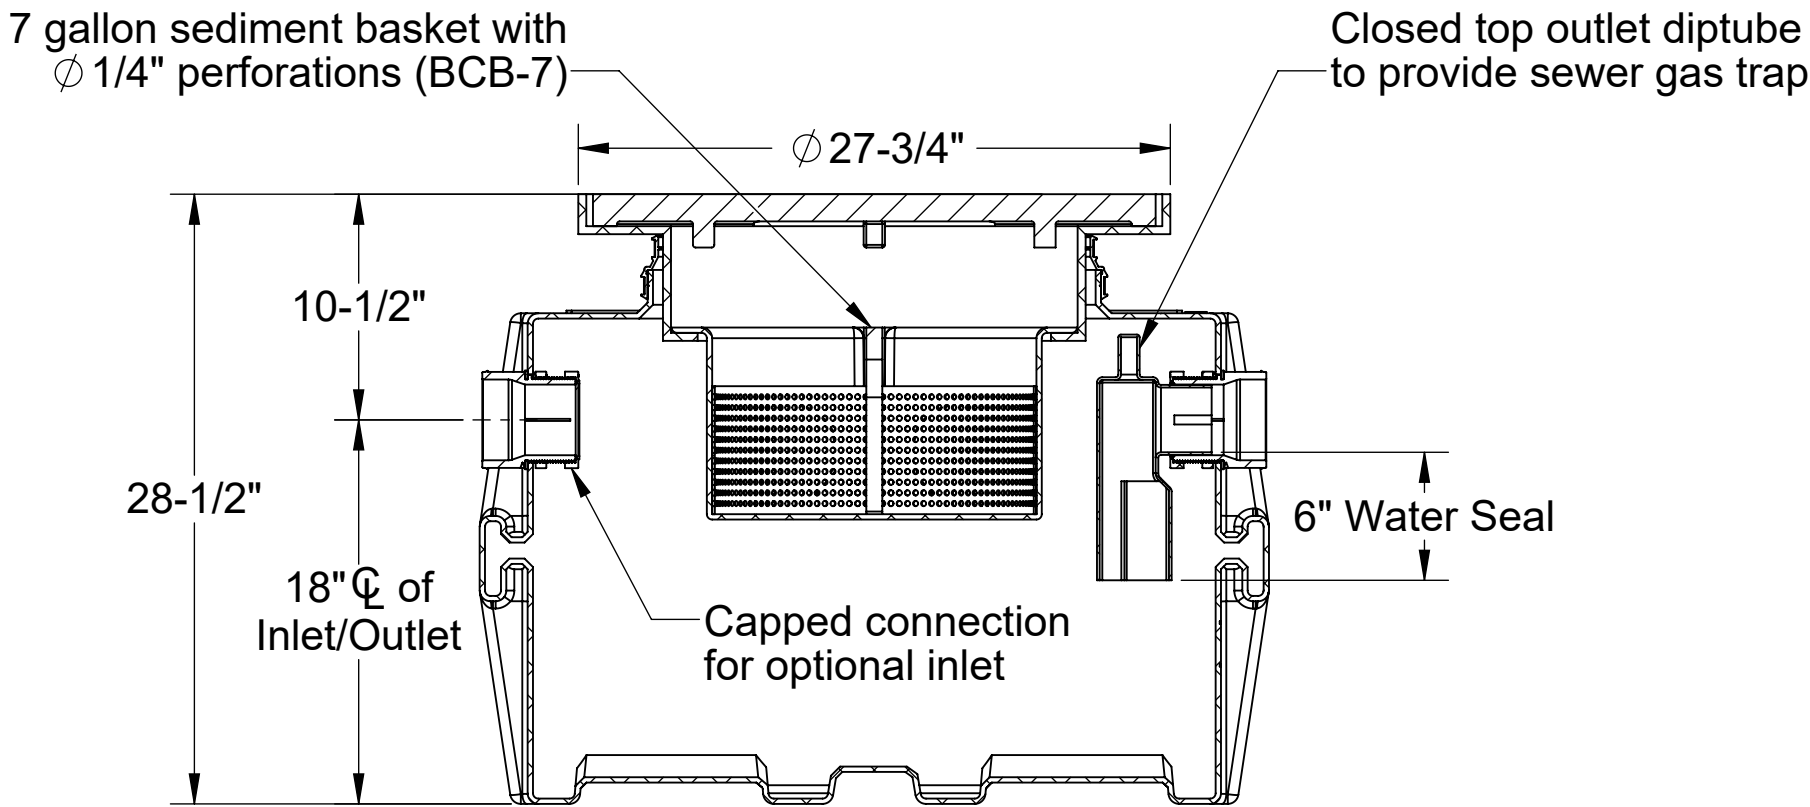

SECTION A-A

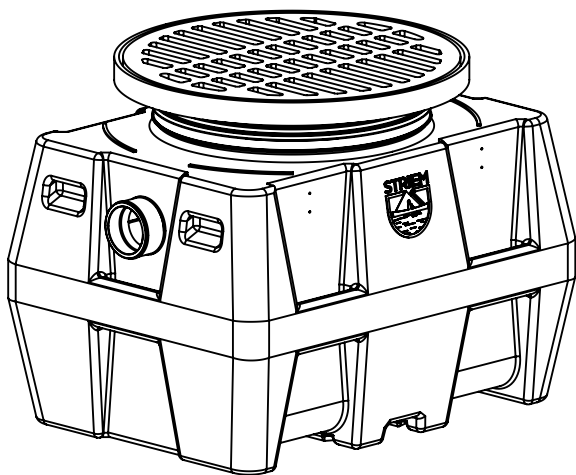

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet
☐ 3"

Riser Options

From factory: Up to 2"

- ☐ 5" - 21": SR24
- ☐ Up to 36": LR24

*If in the range of 2" - 5", contact Striem for a custom solution.

Additional Options

- ☐ HDK-2: High Water Table Hold Down Kit

SPECIFICATION SHEET

MODEL NUMBER: CB-50-G

DESCRIPTION:

POLYETHYLENE CATCH BASIN
WITH H20 RATED CAST IRON GRATE
AND BCB-7 SEDIMENT BASKET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A



DWG BY: ENG DATE: 7/21/2026 REV: 1