SPECIFICATIONS

- 1. 3" Plain End inlet/outlet, 3" Plain End vents standard.
- 2. Max flow rate: 35 GPM.
- 3. Liquid capacity: 38 Gallons (5 cu. ft.).
- 4. Oil capacity: 28 Gallons.
- 5. Solids capacity: 6 Gallons.
- 6. Unit weight: 76 lbs.
- 7. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.

DIFFUSION FLOW TECHNOLOGY


The inlet diffuser splits influent into three paths, creating laminar flow and utilizing the entire liquid volume of the tank for efficient oil separation. The calibrated openings greatly reduce influent turbulence. The influent enters the main chamber without disturbing the existing oil or sand layers. The bottom of the outlet diptube allows only effluent that is free of oil to exit the tank.


ENGINEER SPECIFICATION GUIDE

Striem oil separator model OS-35 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene. Separator shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Separator flow rate shall be 35 GPM. Separator liquid holding capacity shall be 38 gallons and oil capacity shall be 28 gallons. Solids capacity shall be 6 gallons. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs. load capacity.

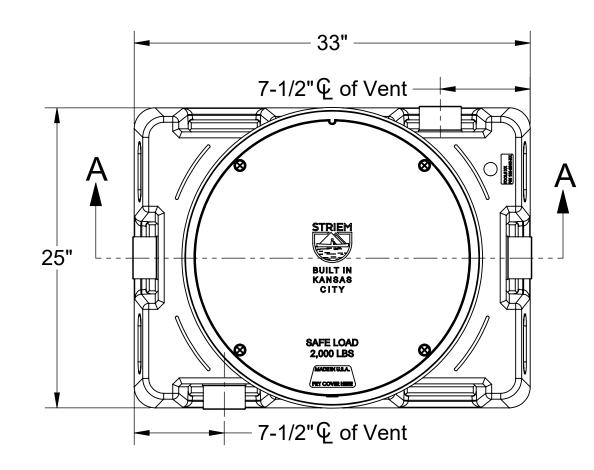


TOP VIEW

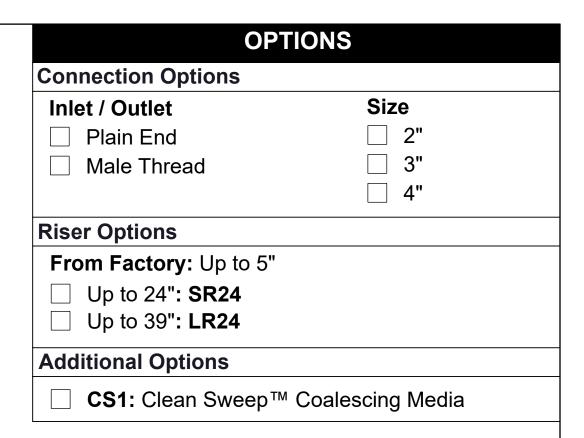

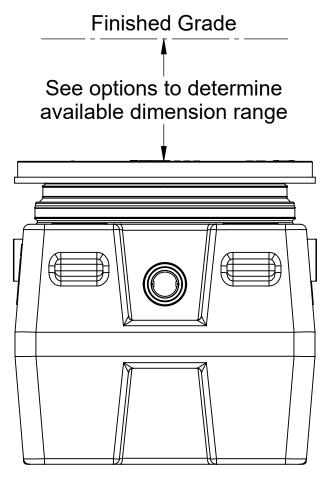




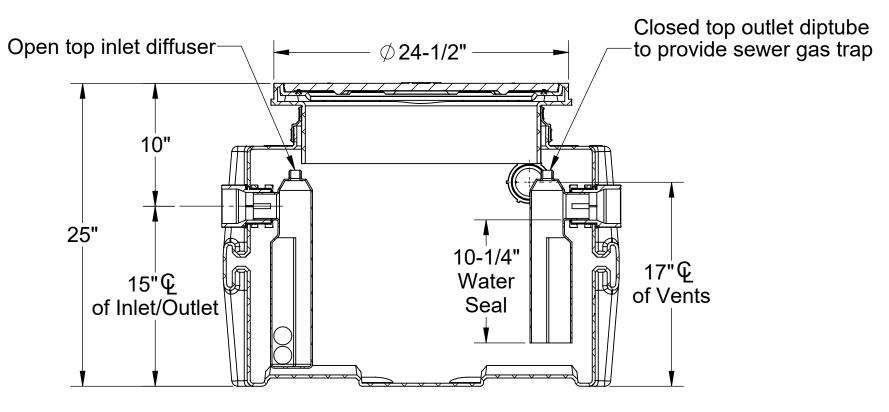

SECTION A-A

MODEL NUMBER:

DESCRIPTION:

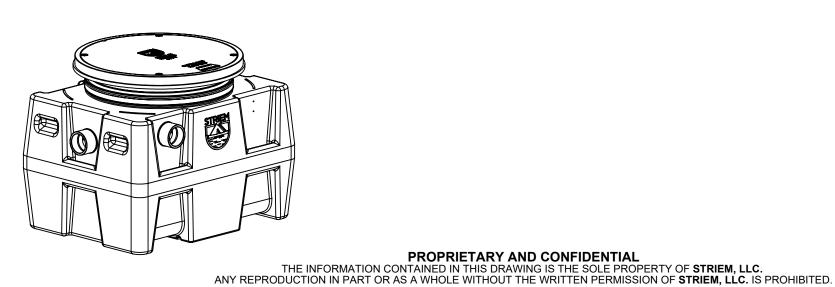

35 GPM POLYETHYLENE OIL/SAND SEPARATOR

OS-35

DWG BY: ENG DATE: 11/27/2023 **REV**: 2

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A

