

SPECIFICATIONS

- 1. 3" Plain End inlet/outlet, 3" Plain End vents standard.
- 2. Max flow rate: 35 GPM.
- 3. Max flow rate to achieve 5 ppm of residual light liquid in effluent: 15 GPM.
- 4. Liquid capacity: 38 Gallons (5 cu. ft.).
- 5. Oil capacity: 28 Gallons.
- 6. Solids capacity: 3 Gallons.
- 7. Unit weight: 103 lbs.
- 8. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Handle of removable coalescing media may be extended using 1-1/2" PVC pipe by others.

DIFFUSION FLOW TECHNOLOGY


The inlet diffuser splits influent into three paths, creating laminar flow and utilizing the entire liquid volume of the tank for efficient oil separation. The calibrated openings greatly reduce influent turbulence. The influent enters the main chamber without disturbing the existing oil or sand layers. The bottom of the outlet diptube allows only effluent that is free of oil to exit the tank.

ENGINEER SPECIFICATION GUIDE


Striem oil separator model OS-35-CS1 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene. Separator shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Separator flow rate shall be 35 GPM. Separator liquid holding capacity shall be 38 gallons and oil capacity shall be 28 gallons. Solids capacity shall be 3 gallons. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs. load capacity.

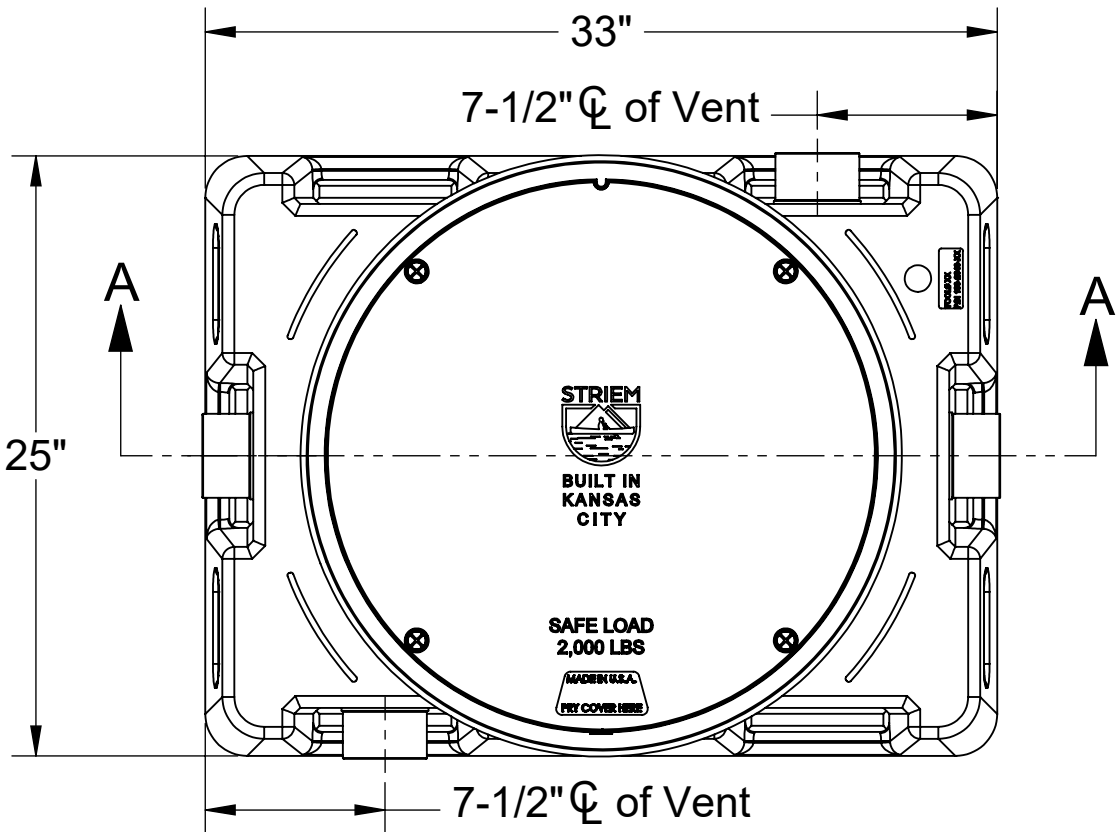

TOP VIEW

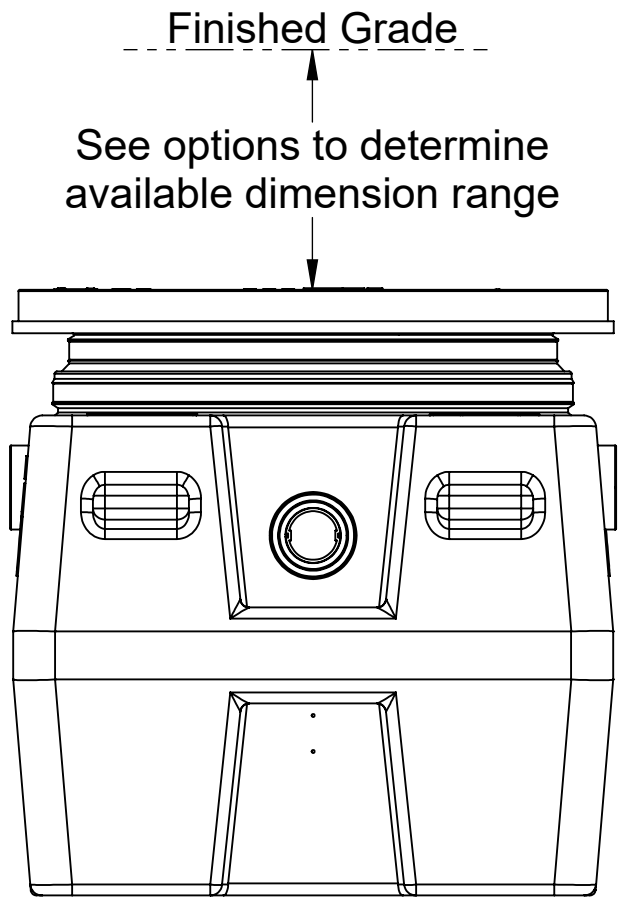

END VIEW

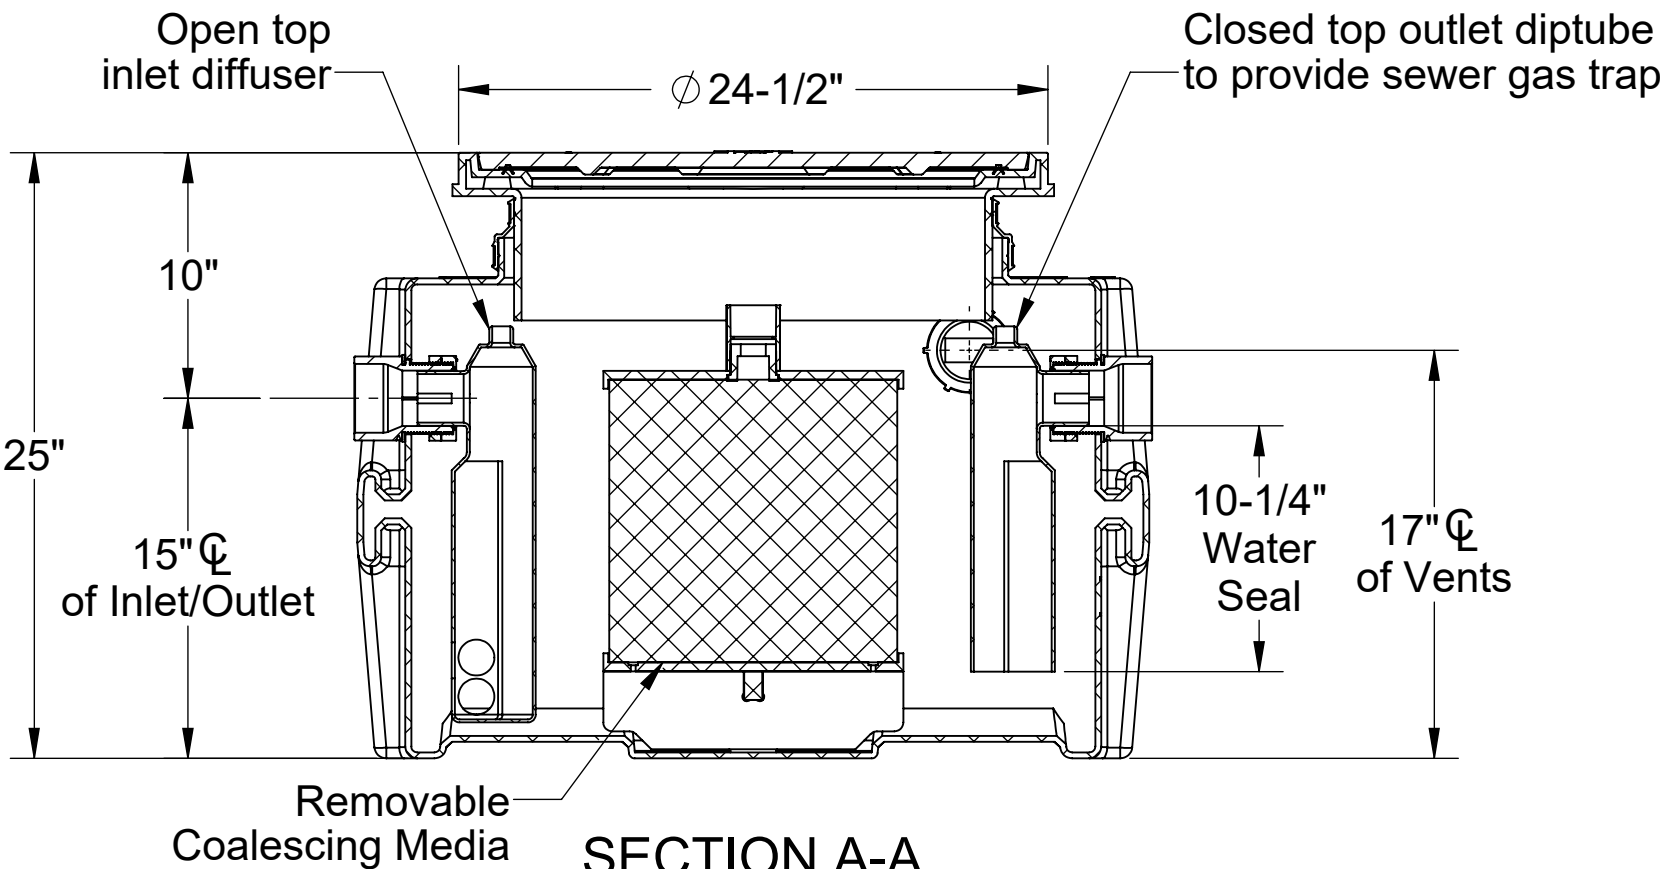

SECTION A-A

OPTIONS

Connection Options

Inlet / Outlet	Size
<input type="checkbox"/> Plain End	<input type="checkbox"/> 2"
<input type="checkbox"/> Male Thread	<input type="checkbox"/> 3"
	<input type="checkbox"/> 4"


Riser Options

From Factory: Up to 5"

- ☐ Up to 24": **SR24**
- ☐ Up to 39": **LR24**

Additional Options

- ☐ **CC24:** Integral Membrane Clamping Collar Kit

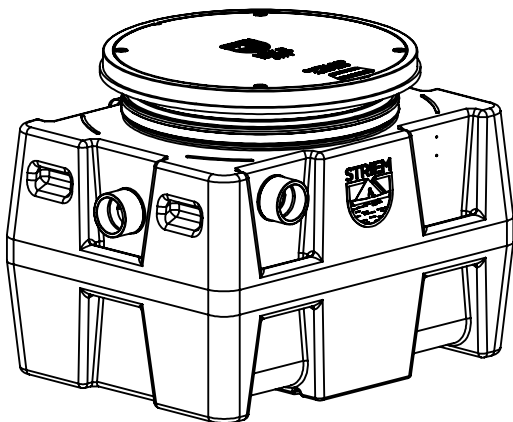

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER: OS-35-CS1

DESCRIPTION:

35 GPM POLYETHYLENE OIL/SAND SEPARATOR
WITH CLEAN SWEEP™ COALESCING MEDIA

DWG BY: ENG DATE: 7/5/2023 REV: 2

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

