SPECIFICATIONS 6" Plain End inlet/outlet shown, 3" Plain End vents standard. Max flow rate: 314 GPM. Liquid capacity: 562 gallons (75 cu. ft.).

Oil capacity: 285 gallons.

Solids capacity: 162 gallons. 6. Unit weight: 1025 lbs.

7. Maximum operating temperature 140°F continuous.

NOTES

1. For gravity drainage applications only.


2. Do not use for pressure applications. Cover placement allows full access to tank for proper maintenance.

4. Lifting lug set for easy install.


ENGINEER SPECIFICATION GUIDE

Finished Grade

Striem oil separator model OT-500 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene with 7/8" nominal wall thickness. Separator shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 314 GPM. Separator liquid holding capacity shall be 562 gallons and oil capacity shall be 285 gallons. Solids capacity shall be 162 gallons. Covers shall be H20 rated pickable cast iron. Separator shall be certified to IAPMO IGC 183-2016 and carry a UPC listing.

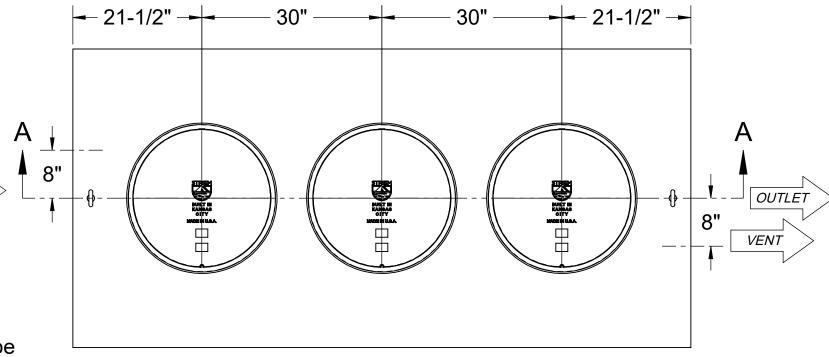

TOP VIEW

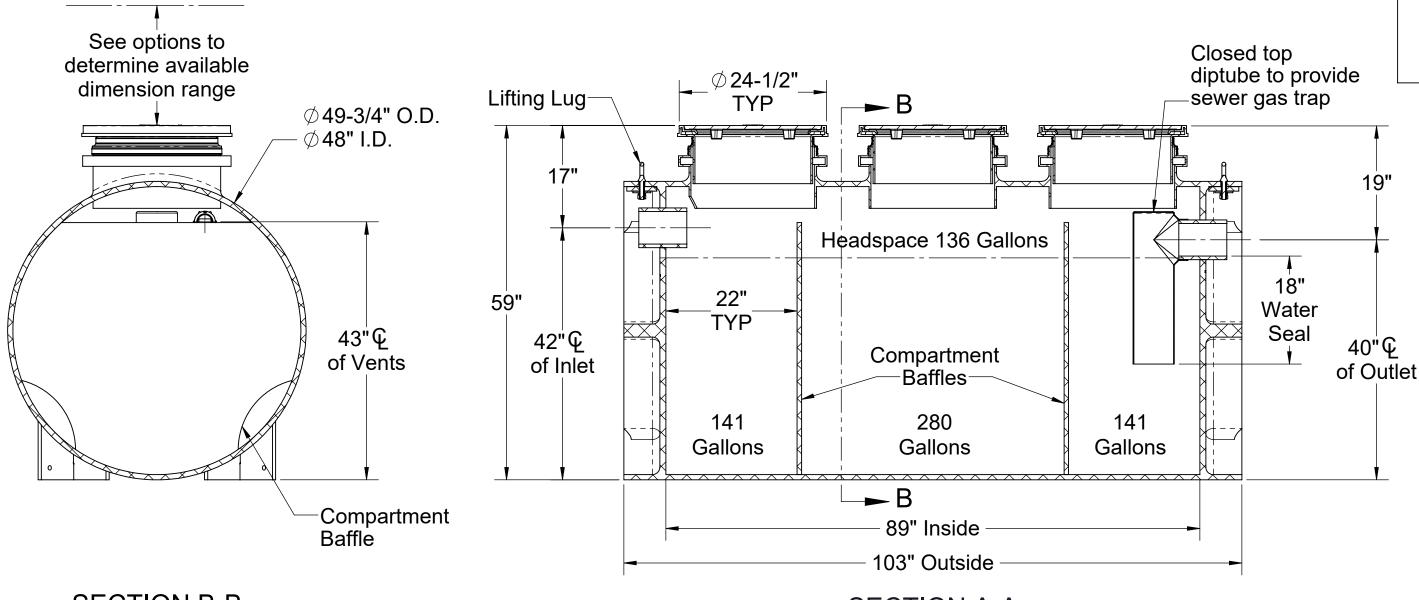


OPTIONS Connection Options (Plain End Only) Inlet / Outlet 4" SELECTION □ 6" REQUIRED **8" Riser Options** From Factory: Up to 5" Up to 24": **SR24** (3) Up to 39": **LR24** (3) Up to 43": **SR24** (6) Up to 58": **SR24** (3) + **LR24** (3) Up to 72": **LR24** (6) Up to 90": **SR24** (3) + **LR24** (6) Up to 106": LR24 (9) - OR -**CPRK** (3): 11" - 106" (See specification for more detail.) **Additional Options HDK-3**: High Water Table Hold Down Kit SS: Slick Stick™ Oil Level Monitoring System* CS3: Clean Sweep™ Coalescing Media** *Monitoring system will raise covers by 3". **Clean Sweep Coalescing Media not compatible with CPRK

SECTION B-B

SECTION A-A

MODEL NUMBER:





VENT

INLET

PO IS NON-CANCELABLE **ORDER IS NON-**RETURNABLE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

DESCRIPTION:

OIL TANKER™ POLYETHYLENE OIL SEPARATOR **562 GALLON CAPACITY**

DWG BY: ENG

DATE:

7/25/2023

REV:

OT-500

Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Striem



Made in the U.S.A