SPECIFICATIONS


- 1. 6" Plain End inlet/outlet shown, 3" Plain End vents standard.
- Max flow rate: 314 GPM.
- Liquid capacity: 750 gallons (100 cu. ft.).
- Oil capacity: 323 gallons.
- Solids capacity: 295 gallons.
- Unit weight: 1253 lbs.
- 7. Maximum operating temperature 140°F continuous.

NOTES


- For gravity drainage applications only.
- Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Lifting lug set for easy install.


ENGINEER SPECIFICATION GUIDE

Striem oil separator model OT-750 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene with 7/8" nominal wall thickness. Separator shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 314 GPM. Separator liquid holding capacity shall be 750 gallons and oil capacity shall be 323 gallons. Solids capacity shall be 295 gallons. Covers shall be H20 rated pickable cast iron. Separator shall be certified to IAPMO IGC 183-2016 and carry a UPC listing.

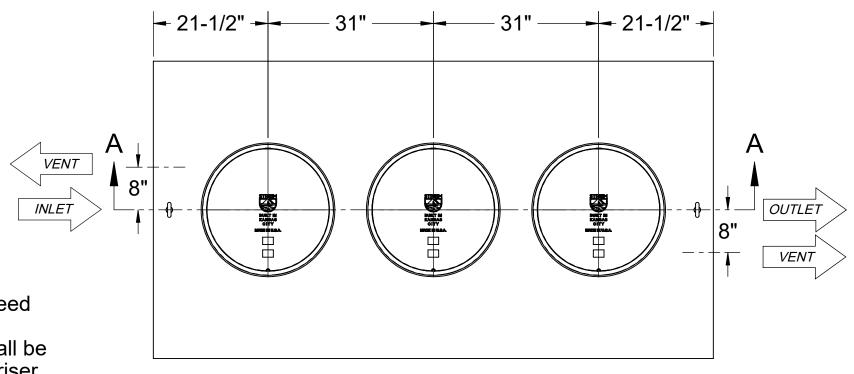

TOP VIEW

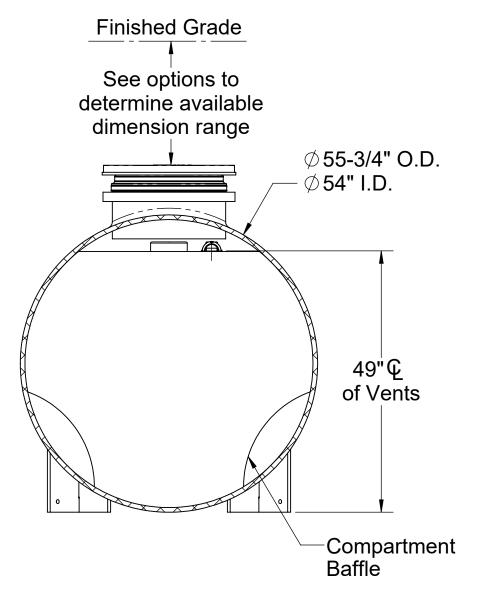

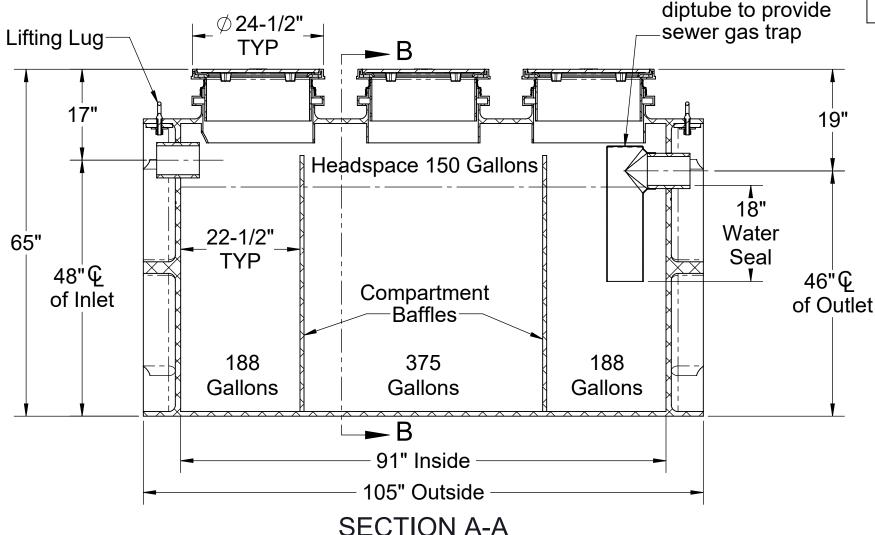

SECTION A-A

SECTION B-B



PO IS NON-CANCELABLE **ORDER IS NON-**RETURNABLE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER:

OT-750

Closed top

DESCRIPTION:

OIL TANKER™ POLYETHYLENE OIL SEPARATOR 750 GALLON CAPACITY

DWG BY: ENG

DATE:

7/25/2023

REV:

SPECIFICATION SHEET

OPTIONS

SELECTION

REQUIRED

CPRK (3): 11" - 106" (See specification for more detail.)

**Clean Sweep Coalescing Media not compatible with CPRK

Connection Options (Plain End Only)

Inlet / Outlet

4"

□ 6"

8"

- OR -

Additional Options

Riser Options

From Factory: Up to 5"

Up to 24": **SR24** (3)

Up to 39": **LR24** (3)

Up to 43": **SR24** (6)

Up to 72": **LR24** (6)

Up to 106": **LR24** (9)

Up to 58": **SR24** (3) + **LR24** (3)

Up to 90": **SR24** (3) + **LR24** (6)

HDK-4: High Water Table Hold Down Kit

*Monitoring system will raise covers by 3".

SS: Slick Stick™ Oil Level Monitoring System*

CS3: Clean Sweep™ Coalescing Media**

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A

