SPECIFICATIONS


- 6" Plain End inlet/outlet shown, 3" Plain End vents standard.
- Max flow rate: 314 GPM.
- Max flow rate to achieve 5 ppm of residual light liquid in effluent: 45 GPM.
- 4. Liquid capacity: 750 gallons (100 cu. ft.).
- Oil capacity: 323 gallons.
- 6. Solids capacity: 148 gallons.
- Unit weight: 1353 lbs.
- 8. Maximum operating temperature 140°F continuous.

NOTES

- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- Cover placement allows full access to tank for proper maintenance.
- 4. Lifting lug set for easy install.
- 5. Handle of removable coalescing media may be extended using 1-1/2" PVC pipe by others.


ENGINEER SPECIFICATION GUIDE


Striem oil separator model OT-750-CS3 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene with 7/8" nominal wall thickness. Separator shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 314 GPM. Separator liquid holding capacity shall be 750 gallons and oil capacity shall be 323 gallons. Solids capacity shall be 148 gallons. Covers shall be H20 rated pickable cast iron. Separator shall be certified to IAPMO IGC 183-2016 and carry a UPC listing.

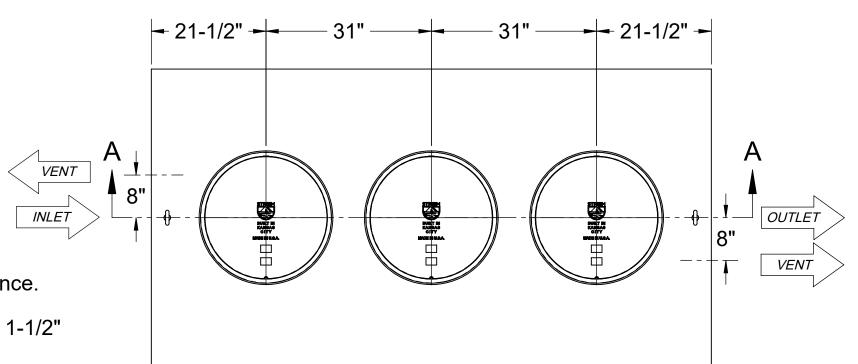

TOP VIEW

OPTIONS Connection Options (Plain End Only) Inlet / Outlet **4"** SELECTION □ 6" REQUIRED **8**" **Riser Options** From Factory: Up to 5" Up to 24": **SR24** (3) ☐ Up to 39": **LR24** (3) ☐ Up to 43": **SR24** (6) ☐ Up to 58": **SR24** (3) + **LR24** (3) Up to 72": **LR24** (6) ☐ Up to 90": **SR24** (3) + **LR24** (6) Up to 106": **LR24** (9) **Additional Options** ☐ **HDK-4**: High Water Table Hold Down Kit SS: Slick Stick™ Oil Level Monitoring System* *Monitoring system will raise covers by 3".

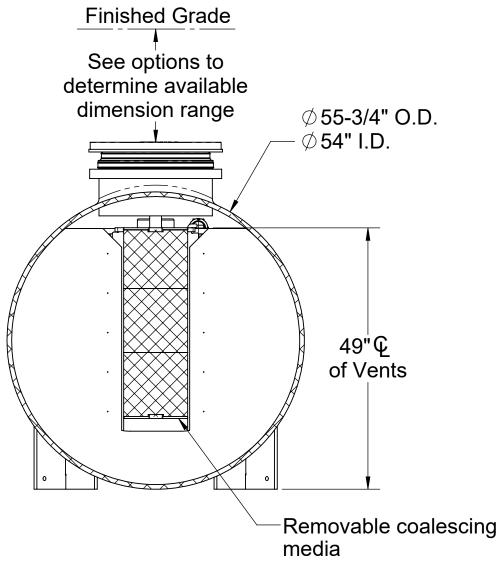

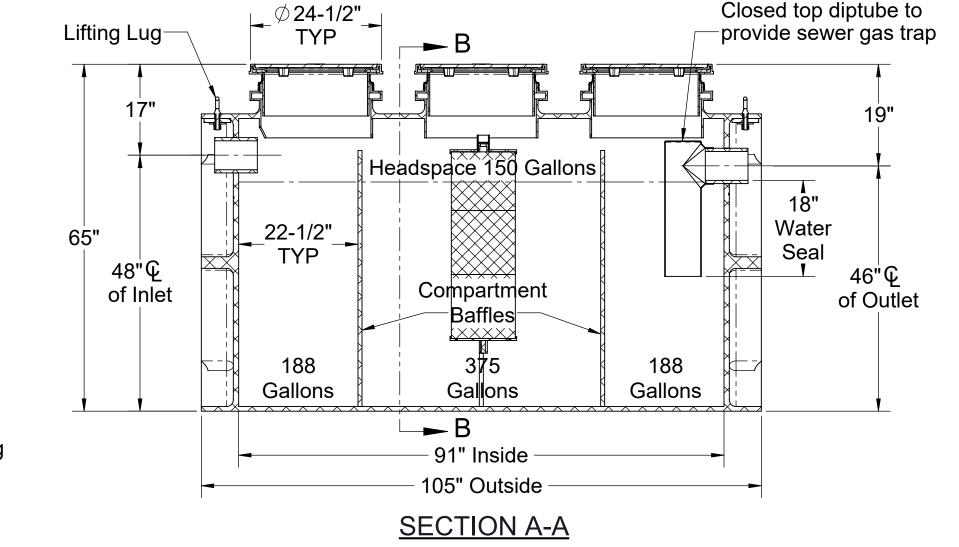

SECTION B-B



PO IS NON-CANCELABLE **ORDER IS NON-**RETURNABLE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

DESCRIPTION:

OIL TANKER™ POLYETHYLENE OIL SEPARATOR WITH CLEAN SWEEP™ COALESCING MEDIA 750 GALLON CAPACITY

DWG BY: ENG

MODEL NUMBER:

DATE:

7/25/2023

OT-750-CS3

REV:

Closed top diptube to

SPECIFICATION SHEET

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A

