

SPECIFICATIONS


- 1. 6" Plain End inlet/outlet shown, 3" Plain End vents standard.
- 2. Max flow rate: 314 GPM.
- 3. Max flow rate to achieve 5 ppm of residual light liquid in effluent: 45 GPM.
- 4. Liquid capacity: 750 gallons (100 cu. ft.).
- 5. Oil capacity: 323 gallons.
- 6. Solids capacity: 148 gallons.
- 7. Unit weight: 1353 lbs.
- 8. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Lifting lug set for easy install.
- 5. Handle of removable coalescing media may be extended using 1-1/2" PVC pipe by others.

ENGINEER SPECIFICATION GUIDE


Striem oil separator model OT-750-CS3 shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene with 7/8" nominal wall thickness. Separator shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 314 GPM. Separator liquid holding capacity shall be 750 gallons and oil capacity shall be 323 gallons. Solids capacity shall be 148 gallons. Covers shall be H20 rated pickable cast iron. Separator shall be certified to IAPMO IGC 183-2016 and carry a UPC listing.

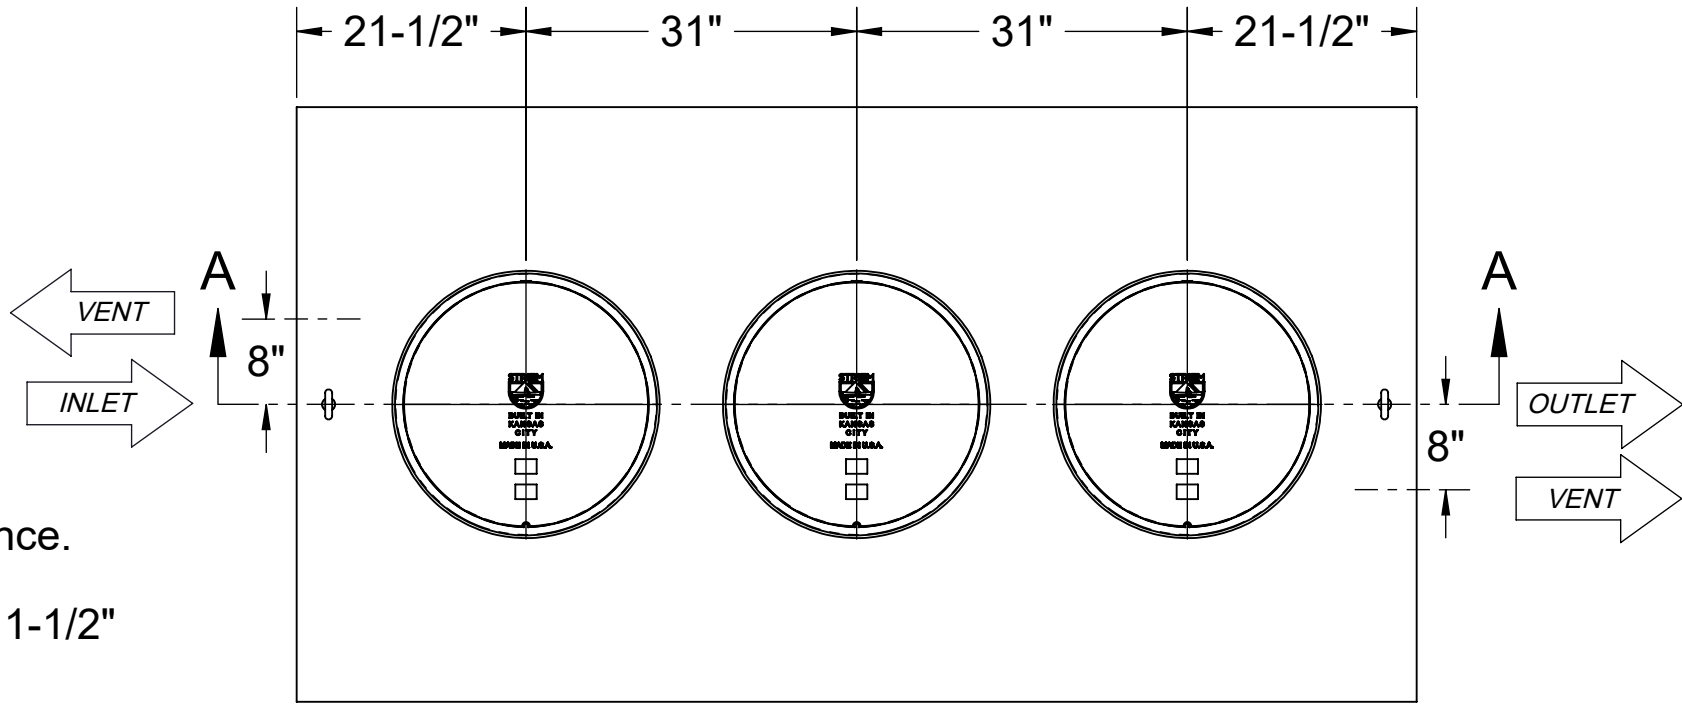

TOP VIEW

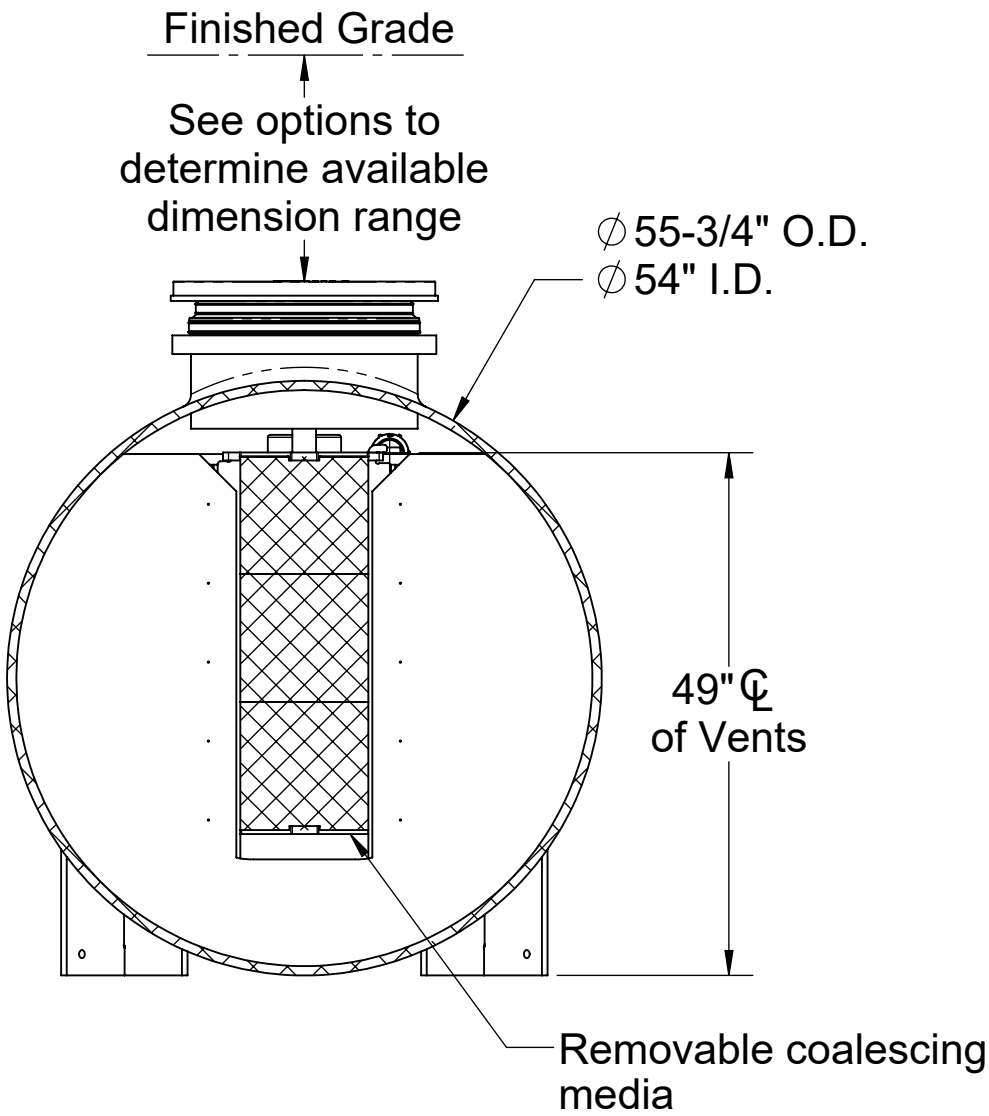

SECTION B-B

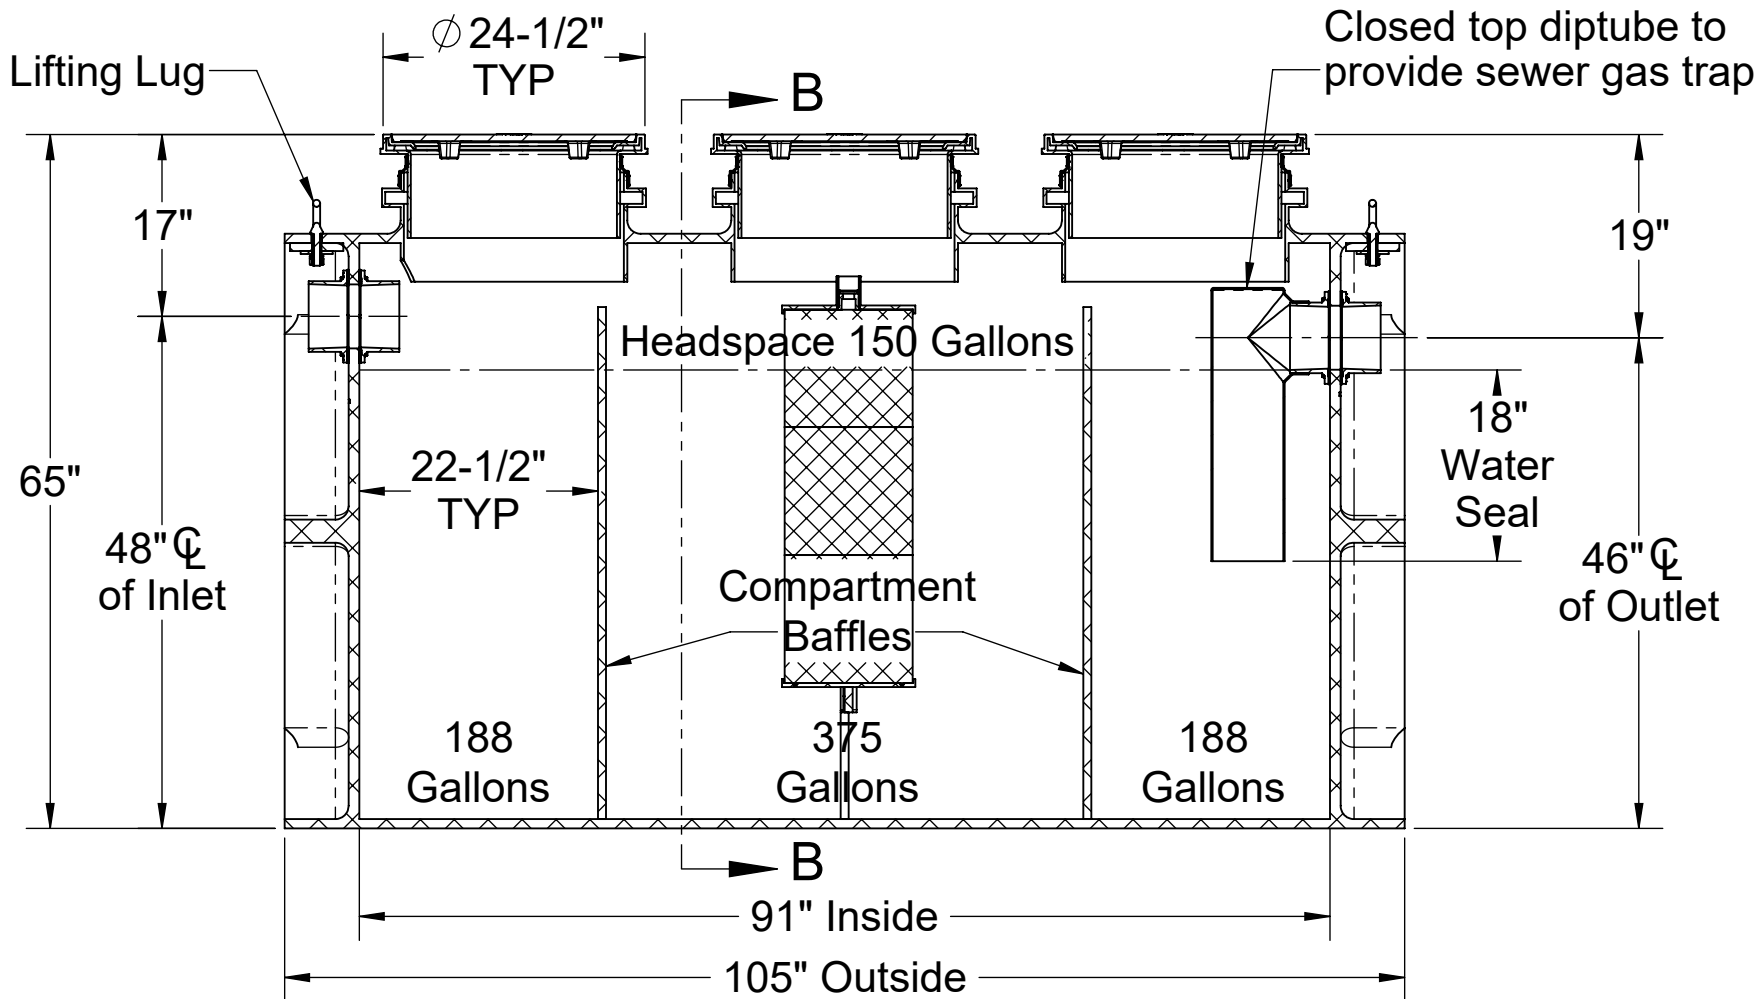

SECTION A-A

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet

- ☐ 4"
- ☐ 6"
- ☐ 8"

SELECTION  
REQUIRED

Riser Options

From Factory: Up to 5"

- ☐ Up to 24": **SR24** (3)
- ☐ Up to 39": **LR24** (3)
- ☐ Up to 43": **SR24** (6)
- ☐ Up to 58": **SR24** (3) + **LR24** (3)
- ☐ Up to 72": **LR24** (6)
- ☐ Up to 90": **SR24** (3) + **LR24** (6)
- ☐ Up to 106": **LR24** (9)

Additional Options

- ☐ **HDK-4**: High Water Table Hold Down Kit
- ☐ **SS**: Slick Stick™ Oil Level Monitoring System\*

\*Monitoring system will raise covers by 3".

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

SPECIFICATION SHEET

MODEL NUMBER: OT-750-CS3

DESCRIPTION:

OIL TANKER™  
POLYETHYLENE OIL SEPARATOR WITH  
CLEAN SWEEP™ COALESCING MEDIA  
750 GALLON CAPACITY



DWG BY: ENG

DATE: 5/12/2023

REV: 0

Striem  
Kansas City, KS  
Tel: 913-222-1500  
orders@striemco.com  
www.striemco.com

Made in the U.S.A

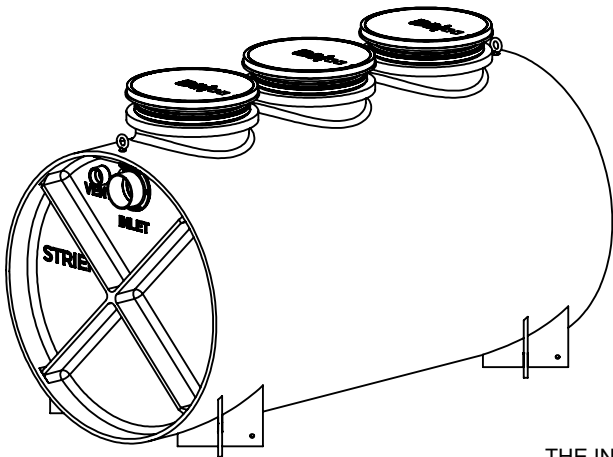

PO IS NON-CANCELABLE  
ORDER IS NON-RETURNABLE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.