




OIL SEPARATORS

STRIEM'S OIL SEPARATOR FOOTPRINT.

- Represents jurisdiction with Striem oil separator installation(s) since 2016.

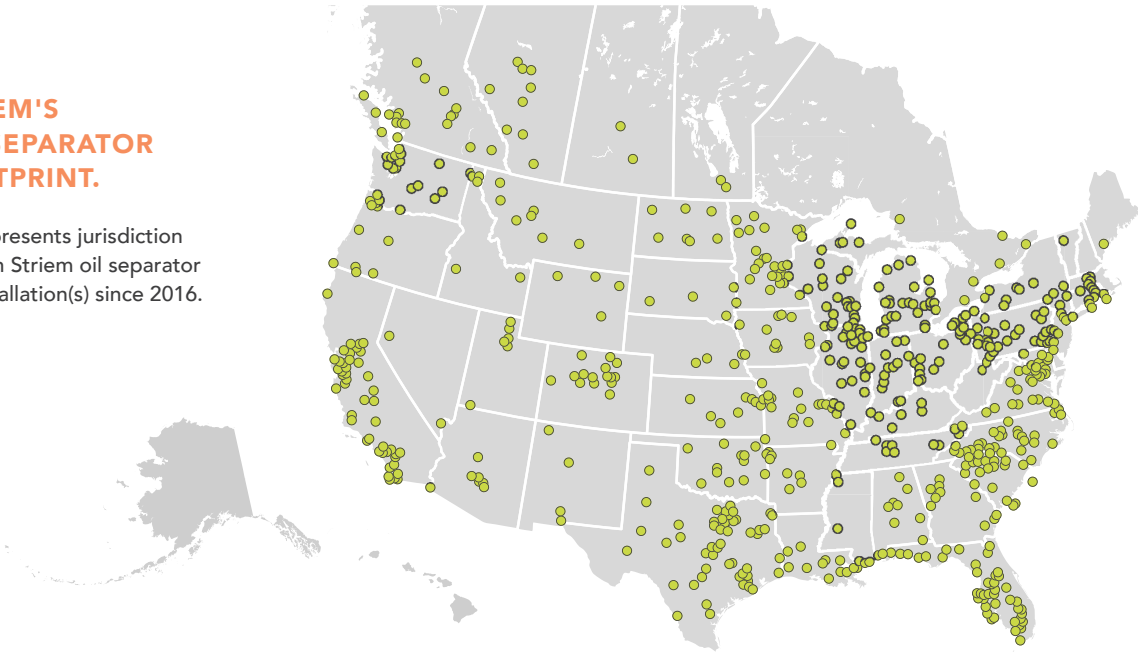

Talk to a real person...

MEET TUCKER, OUR ENGINEER SPECIALIST.

- Sizing assistance
- Jurisdictional approvals
- Technical product information
- A joke to brighten your day

📞 913-222-1500 ✉️ TUCKER.BELL@STRIEMCO.COM

APPLICATIONS




AUTO SERVICE/
REPAIR STATIONS



FIRE HOUSE/
POLICE STATIONS



PARKING
GARAGES



HYDRAULIC
ELEVATOR PITS



CAR WASHES



LOADING
DOCKS



AIRPORTS /
HANGARS




STRIEMCO.COM






OIL SEPARATORS

FLOW RATE BASED



OS-50
 CONNECTIONS: 4"
 MAX FLOW RATE: 50 GPM
 LIQUID CAPACITY: 57 GAL.
 OIL CAPACITY: 40 GAL.
 SAND CAPACITY: 7 GAL.




OS-75
 CONNECTIONS: 4", 6" OPTIONAL
 MAX FLOW RATE: 75 GPM
 LIQUID CAPACITY: 110 GAL.
 OIL CAPACITY: 93 GAL.
 SAND CAPACITY: 11 GAL.




OS-100
 CONNECTIONS: 4", 6" OPTIONAL
 MAX FLOW RATE: 100 GPM
 LIQUID CAPACITY: 250 GAL.
 OIL CAPACITY: 144 GAL.
 SAND CAPACITY: 95 GAL.


VOLUME BASED




OT-500
 CONNECTIONS: 4", 6", or 8"
 MAX FLOW RATE: 314 GPM
 LIQUID CAPACITY: 560 GAL.
 OIL CAPACITY: 285 GAL.
 SAND CAPACITY: 162 GAL.



OT-750
 CONNECTIONS: 4", 6", or 8"
 MAX FLOW RATE: 314 GPM
 LIQUID CAPACITY: 750 GAL.
 OIL CAPACITY: 323 GAL.
 SAND CAPACITY: 295 GAL.



OT-1000
 CONNECTIONS: 4", 6", or 8"
 MAX FLOW RATE: 314 GPM
 LIQUID CAPACITY: 1,000 GAL.
 OIL CAPACITY: 370 GAL.
 SAND CAPACITY: 477 GAL.

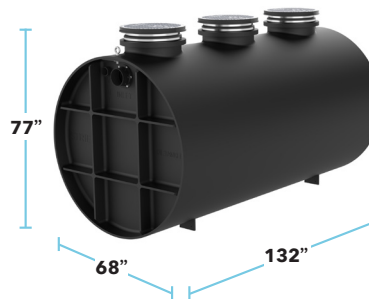

OT-1500
 CONNECTIONS: 4", 6", or 8"
 MAX FLOW RATE: 314 GPM
 LIQUID CAPACITY: 1,500 GAL.
 OIL CAPACITY: 488 GAL.
 SAND CAPACITY: 825 GAL.

FEATURES

- Constructed of non-corrosive Polyethylene
- Lightweight for easy installation
- Reinforced for direct burial

OPTIONS

- Field-adjustable extensions
- High water anchor kits
- Slick Stick™ oil level monitoring system
- Coalescing media

SPEC FORMATS



*AVAILABLE ONLINE FOR ALL PRODUCTS



STRIEMCO.COM

