




OIL SEPARATORS

STRIEM'S OIL SEPARATOR FOOTPRINT

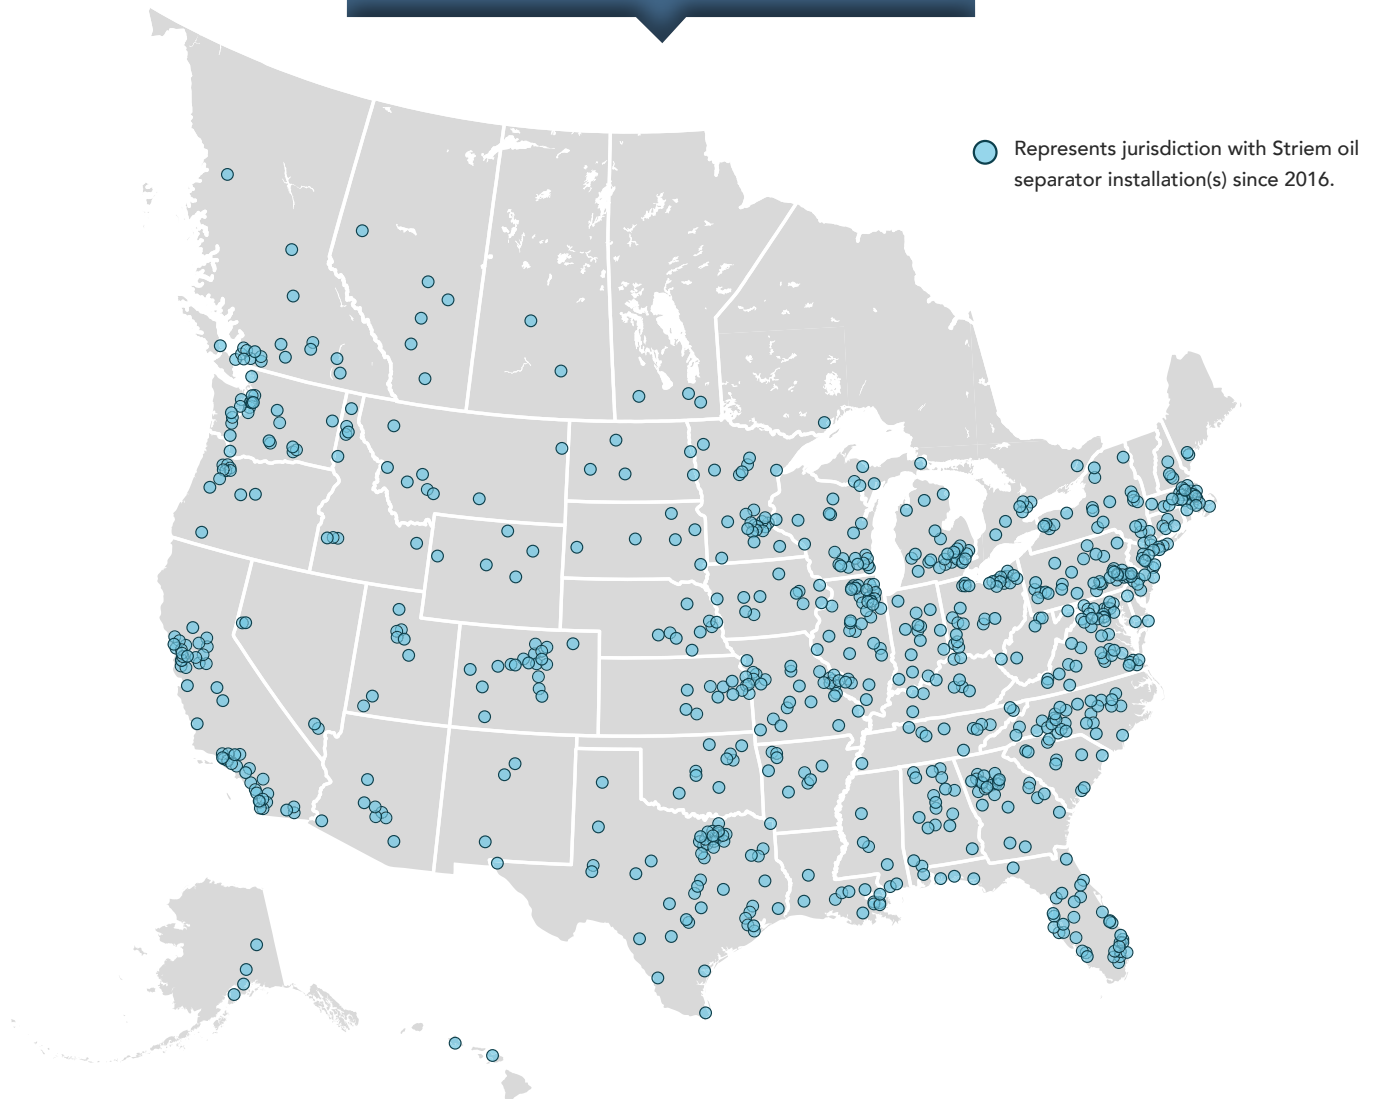

APPLICATIONS




AUTO SERVICE/
REPAIR STATIONS



FIRE HOUSE/
POLICE STATIONS



PARKING
GARAGES



HYDRAULIC
ELEVATOR PITS



CAR WASHES



LOADING
DOCKS



AIRPORTS /
HANGARS



LIFETIME
GUARANTEED



913-222-1500



HELP@STRIEMCO.COM








STRIEMCO.COM

MADE
IN THE
USA
★ BUILT in ★
KANSAS CITY



OIL SEPARATORS

HIGH EFFICIENCY OIL/WATER SEPARATOR SERIES:






OS-25	OS-50	OS-75	OS-100	OS-350
 15" 21" 27"	 28½" 28" 37"	 38½" 32" 46"	 51½" 33" 68"	 51" 33" 95"
99% EFFICIENT	98% EFFICIENT	99% EFFICIENT	99% EFFICIENT	99% EFFICIENT
CONNECTIONS: 3" LIQUID CAPACITY: 21 GAL. OIL CAPACITY: 5.25 GAL. SAND CAPACITY: 6 GAL. COVER: PEDESTRIAN-RATED CERTIFIED FLOW RATE: 25 GPM	CONNECTIONS: 4" LIQUID CAPACITY: 57 GAL. OIL CAPACITY: 14.25 GAL. SAND CAPACITY: 7 GAL. COVER: PEDESTRIAN-RATED CERTIFIED FLOW RATE: 50 GPM	CONNECTIONS: 4", 6" LIQUID CAPACITY: 110 GAL. OIL CAPACITY: 27.5 GAL. SAND CAPACITY: 11 GAL. COVER: PEDESTRIAN-RATED CERTIFIED FLOW RATE: 75 GPM	CONNECTIONS: 4", 6" LIQUID CAPACITY: 250 GAL. OIL CAPACITY: 62.5 GAL. SAND CAPACITY: 95 GAL. COVER: PEDESTRIAN-RATED CERTIFIED FLOW RATE: 100 GPM	CONNECTIONS: 4", 6" LIQUID CAPACITY: 350 GAL. OIL CAPACITY: 87.5 GAL. SAND CAPACITY: 114 GAL. COVER: CAST IRON (H-20) CERTIFIED FLOW RATE: 100 GPM

- ✓ Certified to IAPMO IGC 325, the industry's first oil separator **performance** standard.
- ✓ Meets EPA hydrocarbon discharge guidance of 100 ppm or less.¹



Listed by IAPMO
to IGC 325

OIL TANKER SERIES:

OT-500	OT-750	OT-1000	OT-1500	OT-2000
 59" 49-¾" 103"	 65" 55-¾" 105"	 71" 61-¾" 110"	 77" 67-¾" 132"	 77" 67-¾" 148"
CONNECTIONS: 4", 6", 8" LIQUID CAPACITY: 562 GAL. OIL CAPACITY: 285 GAL. SAND CAPACITY: 162 GAL. COVER: CAST IRON (H-20)	CONNECTIONS: 4", 6", 8" LIQUID CAPACITY: 750 GAL. OIL CAPACITY: 323 GAL. SAND CAPACITY: 295 GAL. COVER: CAST IRON (H-20)	CONNECTIONS: 4", 6", 8" LIQUID CAPACITY: 1,000 GAL. OIL CAPACITY: 370 GAL. SAND CAPACITY: 477 GAL. COVER: CAST IRON (H-20)	CONNECTIONS: 4", 6", 8" LIQUID CAPACITY: 1,500 GAL. OIL CAPACITY: 488 GAL. SAND CAPACITY: 825 GAL. COVER: CAST IRON (H-20)	CONNECTIONS: 4", 6", 8" LIQUID CAPACITY: 2,000 GAL. OIL CAPACITY: 638 GAL. SAND CAPACITY: 1,077 GAL. COVER: CAST IRON (H-20)



Listed by IAPMO
to IGC 183-2016

FEATURES

- Constructed of non-corrosive Polyethylene
- Lightweight for easy installation
- Reinforced for direct burial

OPTIONS

- Field-adjustable extensions
- High water anchor kits
- Slick Stick™ oil level monitoring system

SPEC FORMATS



AVAILABLE ONLINE FOR ALL PRODUCTS