




OIL SEPARATORS

STRIEM'S OIL SEPARATOR FOOTPRINT.

- Represents jurisdiction
with Striem oil separator
installation(s) since 2016.

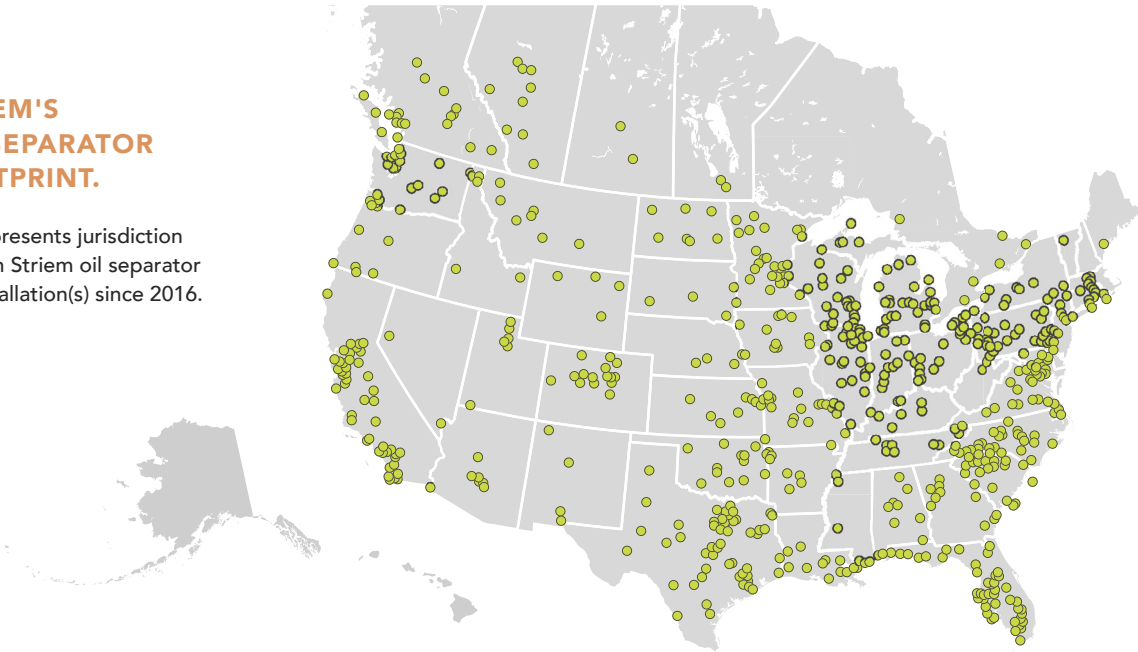

Talk to a real person...

MEET TUCKER,
OUR ENGINEER SPECIALIST.

- Sizing assistance
- Jurisdictional approvals
- Technical product information
- A joke to brighten your day

☎ 913-222-1500 ✉ TUCKER.BELL@STRIEMCO.COM

APPLICATIONS




AUTO SERVICE/
REPAIR STATIONS



FIRE HOUSE/
POLICE STATIONS



PARKING
GARAGES



HYDRAULIC
ELEVATOR PITS



CAR WASHES



LOADING
DOCKS



AIRPORTS /
HANGARS



STRIEMCO.COM






OIL SEPARATORS

FLOW RATE BASED:




OS-50

CONNECTIONS: 4"
MAX FLOW RATE: 50 GPM
LIQUID CAPACITY: 57 GAL.
OIL CAPACITY: 40 GAL.
SAND CAPACITY: 7 GAL.



OS-75

CONNECTIONS: 4", 6" OPTIONAL
MAX FLOW RATE: 75 GPM
LIQUID CAPACITY: 110 GAL.
OIL CAPACITY: 93 GAL.
SAND CAPACITY: 11 GAL.



OS-100

CONNECTIONS: 4", 6" OPTIONAL
MAX FLOW RATE: 100 GPM
LIQUID CAPACITY: 250 GAL.
OIL CAPACITY: 144 GAL.
SAND CAPACITY: 95 GAL.

FEATURES

- Constructed of non-corrosive Polyethylene
- Lightweight for easy installation
- Reinforced for direct burial

OPTIONS

- Field-adjustable extensions
- High water anchor kits
- Slick Stick™ oil level monitoring system
- Coalescing media

SPEC FORMATS



RFA



DWG




PDF



CSI


*AVAILABLE ONLINE FOR ALL PRODUCTS

VOLUME BASED:




OT-500

CONNECTIONS: 4", 6", or 8"
MAX FLOW RATE: 314 GPM
LIQUID CAPACITY: 560 GAL.
OIL CAPACITY: 285 GAL.
SAND CAPACITY: 162 GAL.




OT-750

CONNECTIONS: 4", 6", or 8"
MAX FLOW RATE: 314 GPM
LIQUID CAPACITY: 750 GAL.
OIL CAPACITY: 323 GAL.
SAND CAPACITY: 295 GAL.




OT-1000

CONNECTIONS: 4", 6", or 8"
MAX FLOW RATE: 314 GPM
LIQUID CAPACITY: 1,000 GAL.
OIL CAPACITY: 370 GAL.
SAND CAPACITY: 477 GAL.

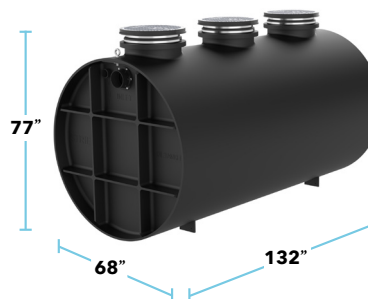

OT-1500

CONNECTIONS: 4", 6", or 8"
MAX FLOW RATE: 314 GPM
LIQUID CAPACITY: 1,500 GAL.
OIL CAPACITY: 488 GAL.
SAND CAPACITY: 825 GAL.

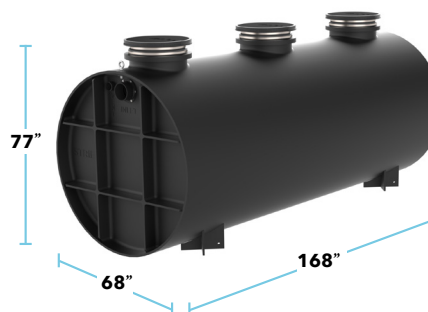

OT-2000

CONNECTIONS: 4", 6", or 8"
MAX FLOW RATE: 314 GPM
LIQUID CAPACITY: 2,000 GAL.
OIL CAPACITY: 638 GAL.
SAND CAPACITY: 1,077 GAL.



913-222-1500 HELP@STRIEMCO.COM

STRIEMCO.COM

