




OIL SEPARATORS

STRIEM'S OIL SEPARATOR FOOTPRINT.

- Represents jurisdiction with Striem oil separator installation(s) since 2016.

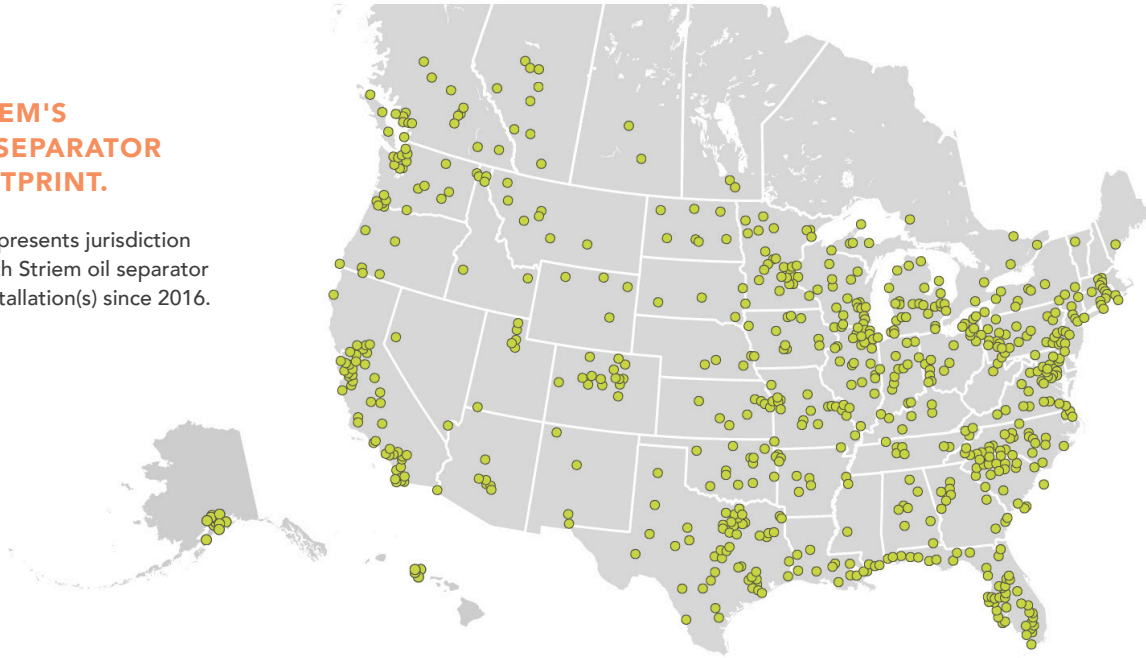

Talk to a real person...

MEET TUCKER, OUR ENGINEER SPECIALIST.

- Sizing assistance
- Jurisdictional approvals
- Technical product information
- A joke to brighten your day

📞 913-222-1500 ✉️ TUCKER.BELL@STRIEMCO.COM


APPLICATIONS




AUTO SERVICE/
REPAIR STATIONS



FIRE HOUSE/
POLICE STATIONS



PARKING
GARAGES



HYDRAULIC
ELEVATOR PITS



CAR WASHES



LOADING
DOCKS



AIRPORTS /
HANGARS




STRIEMCO.COM






OIL SEPARATORS

FLOW RATE BASED



OS-50

CONNECTIONS: 4"
MAX FLOW RATE: 50 GPM
LIQUID CAPACITY: 57 GAL.
OIL CAPACITY: 40 GAL.
SAND CAPACITY: 7 GAL.



OS-75


CONNECTIONS: 4", 6" OPTIONAL
MAX FLOW RATE: 75 GPM
LIQUID CAPACITY: 110 GAL.
OIL CAPACITY: 93 GAL.
SAND CAPACITY: 11 GAL.



OS-100


CONNECTIONS: 4", 6" OPTIONAL
MAX FLOW RATE: 100 GPM
LIQUID CAPACITY: 250 GAL.
OIL CAPACITY: 144 GAL.
SAND CAPACITY: 95 GAL.

VOLUME BASED




OS-750

CONNECTIONS: 6", 4" OPTIONAL
LIQUID CAPACITY: 750 GAL.
OIL CAPACITY: 401 GAL.
SAND CAPACITY: 307 GAL.

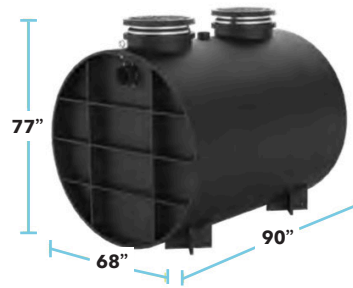

OS-1000

CONNECTIONS: 6", 4" OPTIONAL
LIQUID CAPACITY: 1,000 GAL.
OIL CAPACITY: 451 GAL.
SAND CAPACITY: 347 GAL.

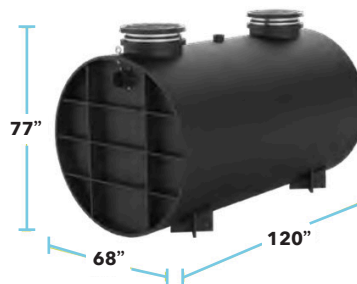

OS-1500

CONNECTIONS: 6", 4" OPTIONAL
LIQUID CAPACITY: 1,500 GAL.
OIL CAPACITY: 610 GAL.
SAND CAPACITY: 486 GAL.

FEATURES

- Constructed of non-corrosive Polyethylene
- Lightweight for easy installation
- Reinforced for direct burial

OPTIONS

- Field-adjustable extensions
- High water anchor kits
- Slick Stick™ oil level monitoring system

SPEC FORMATS



*AVAILABLE ONLINE FOR ALL PRODUCTS



STRIEMCO.COM

