### **SPECIFICATIONS**

- 3" Plain End inlet/outlet
- Liquid Capacity: 38 gal.
- Solids Capacity: 19 gal.
- Unit weight with standard cover: 83 lbs.
- Maximum operating temperature 140°F continuous.
- 6. Pedestrian rated cover: 2,000 lb. capacity.

## **NOTES**

- 1. For gravity drainage applications only. Do not use for pressure applications.
- 3/8" seamless polyethylene tank.
- 3. Unit supplied with built-in adapter for up to 5" of adjustability. Additional riser(s) available for deeper burial depth.
- 4. Cover placement allows full access to tank for proper maintenance.
- Internal components are removable for easy maintenance.
- 6. For on the-floor or buried applications.

### **ENGINEER SPECIFICATION GUIDE**


Striem Prospector™ solids interceptor model PS-35-S shall be lifetime guaranteed and Made in USA of seamless, rotationally-molded Medium Density Polyethylene with minimum 3/8" uniform wall thickness. Interceptor shall be furnished for above or below-grade installation. Interceptor shall be furnished with connection for extending handle for deep burials. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs load capacity.


## **OPTIONS**

- **2P:** 2" Plain end inlet/outlet
- **2M**: 2" Male thread inlet/outlet
- **3M:** 3" Male thread inlet/outlet
- 4P: 4" Plain end inlet/outlet
- **4M:** 4" Male thread inlet/outlet
- **C:** Course filter screen (openings 0.3" x0.27")
- **M:** Medium filter screen (openings 0.1" x 0.08")
  - **F:** Fine filter screen (openings 0.03" x 0.025")

# **TeleGlide RISER OPTIONS**

- Included: 0" 5"
- **SR24**: 5" 24"
- **LR24**: 24" 39"

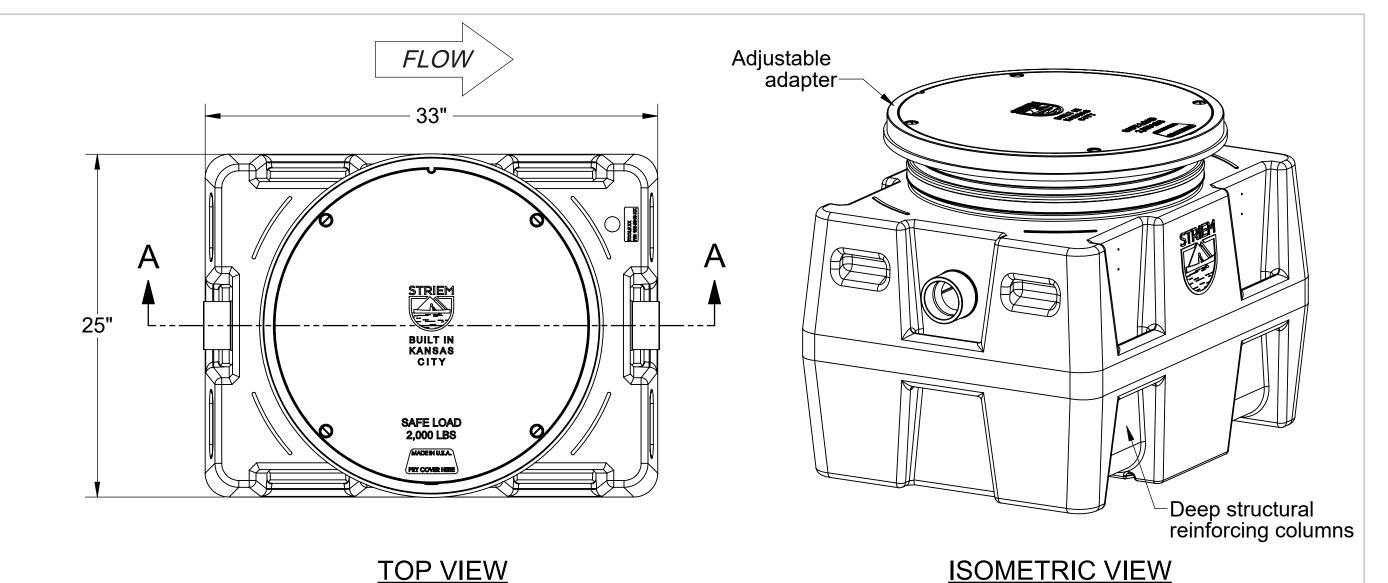

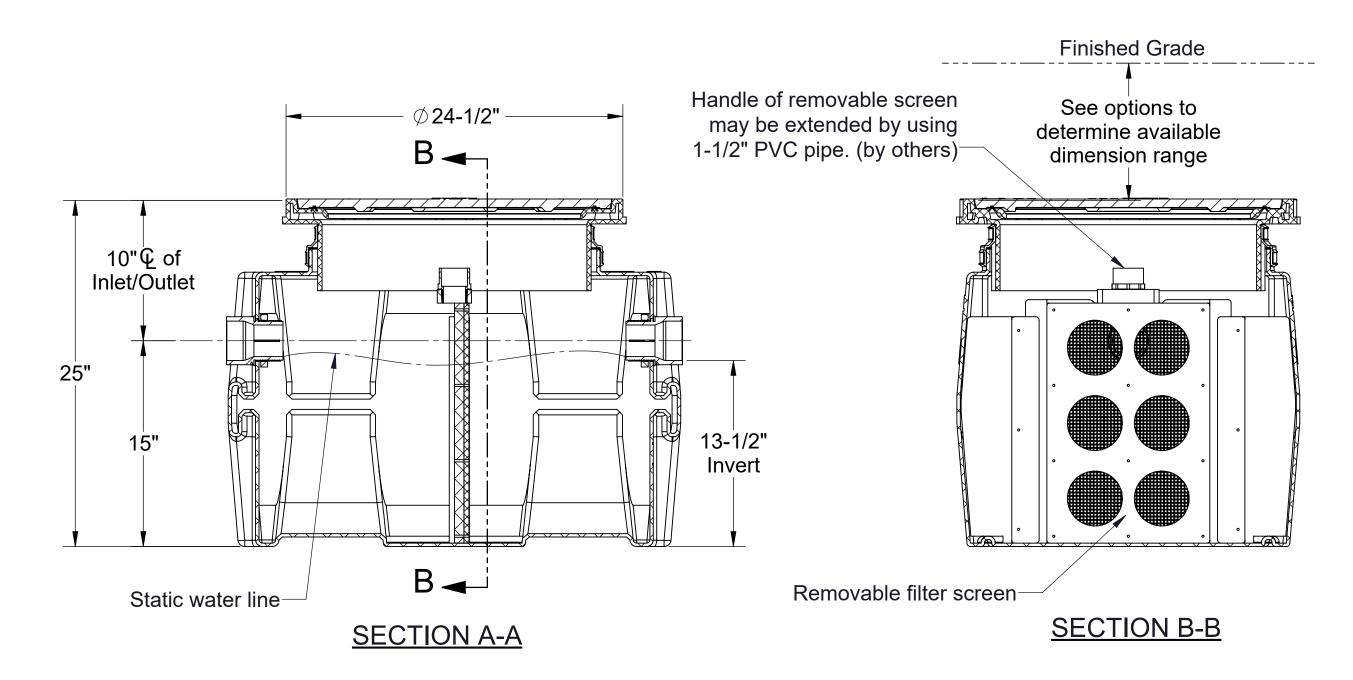

**MODEL NUMBER:** 

PS-35-S

SPECIFICATION SHEET

# **DESCRIPTION:**

38 GALLON LIQUID CAPACITY

**DWG BY:**WLF | **DATE**: 4/29/22 **REV**: 1 ECO:

PROSPECTOR SERIES POLYETHYLENE SCREEN STYLER SOLIDS INTERCEPTOR

Made in the U.S.A

**Striem** 

3100 Brinkerhoff Kansas City, KS 66115 Tel: 913-222-1500

orders@striemco.com www.striemco.com

