

SPECIFICATIONS

- 1. 4" Plain End inlet/outlet standard.
- 2. Liquid holding capacity: 1 Gallon.
- 3. Unit weight: 25 lbs.
- 4. Maximum operating temperature 140°F continuous.
- 5. Heavy duty cast iron cover with sidewall.



NOTES

- 1. For below-grade placement of pH probe for CC-1 Command Center monitoring package.
- 2. For gravity drainage applications only.
- 3. Do not use for pressure applications.
- 4. Unit for below-grade installation.

OPTIONS

Connection Options (Plain End Only)

- ☐ 2"
- ☐ 3"
- ☐ 4"
- ☐ 6"

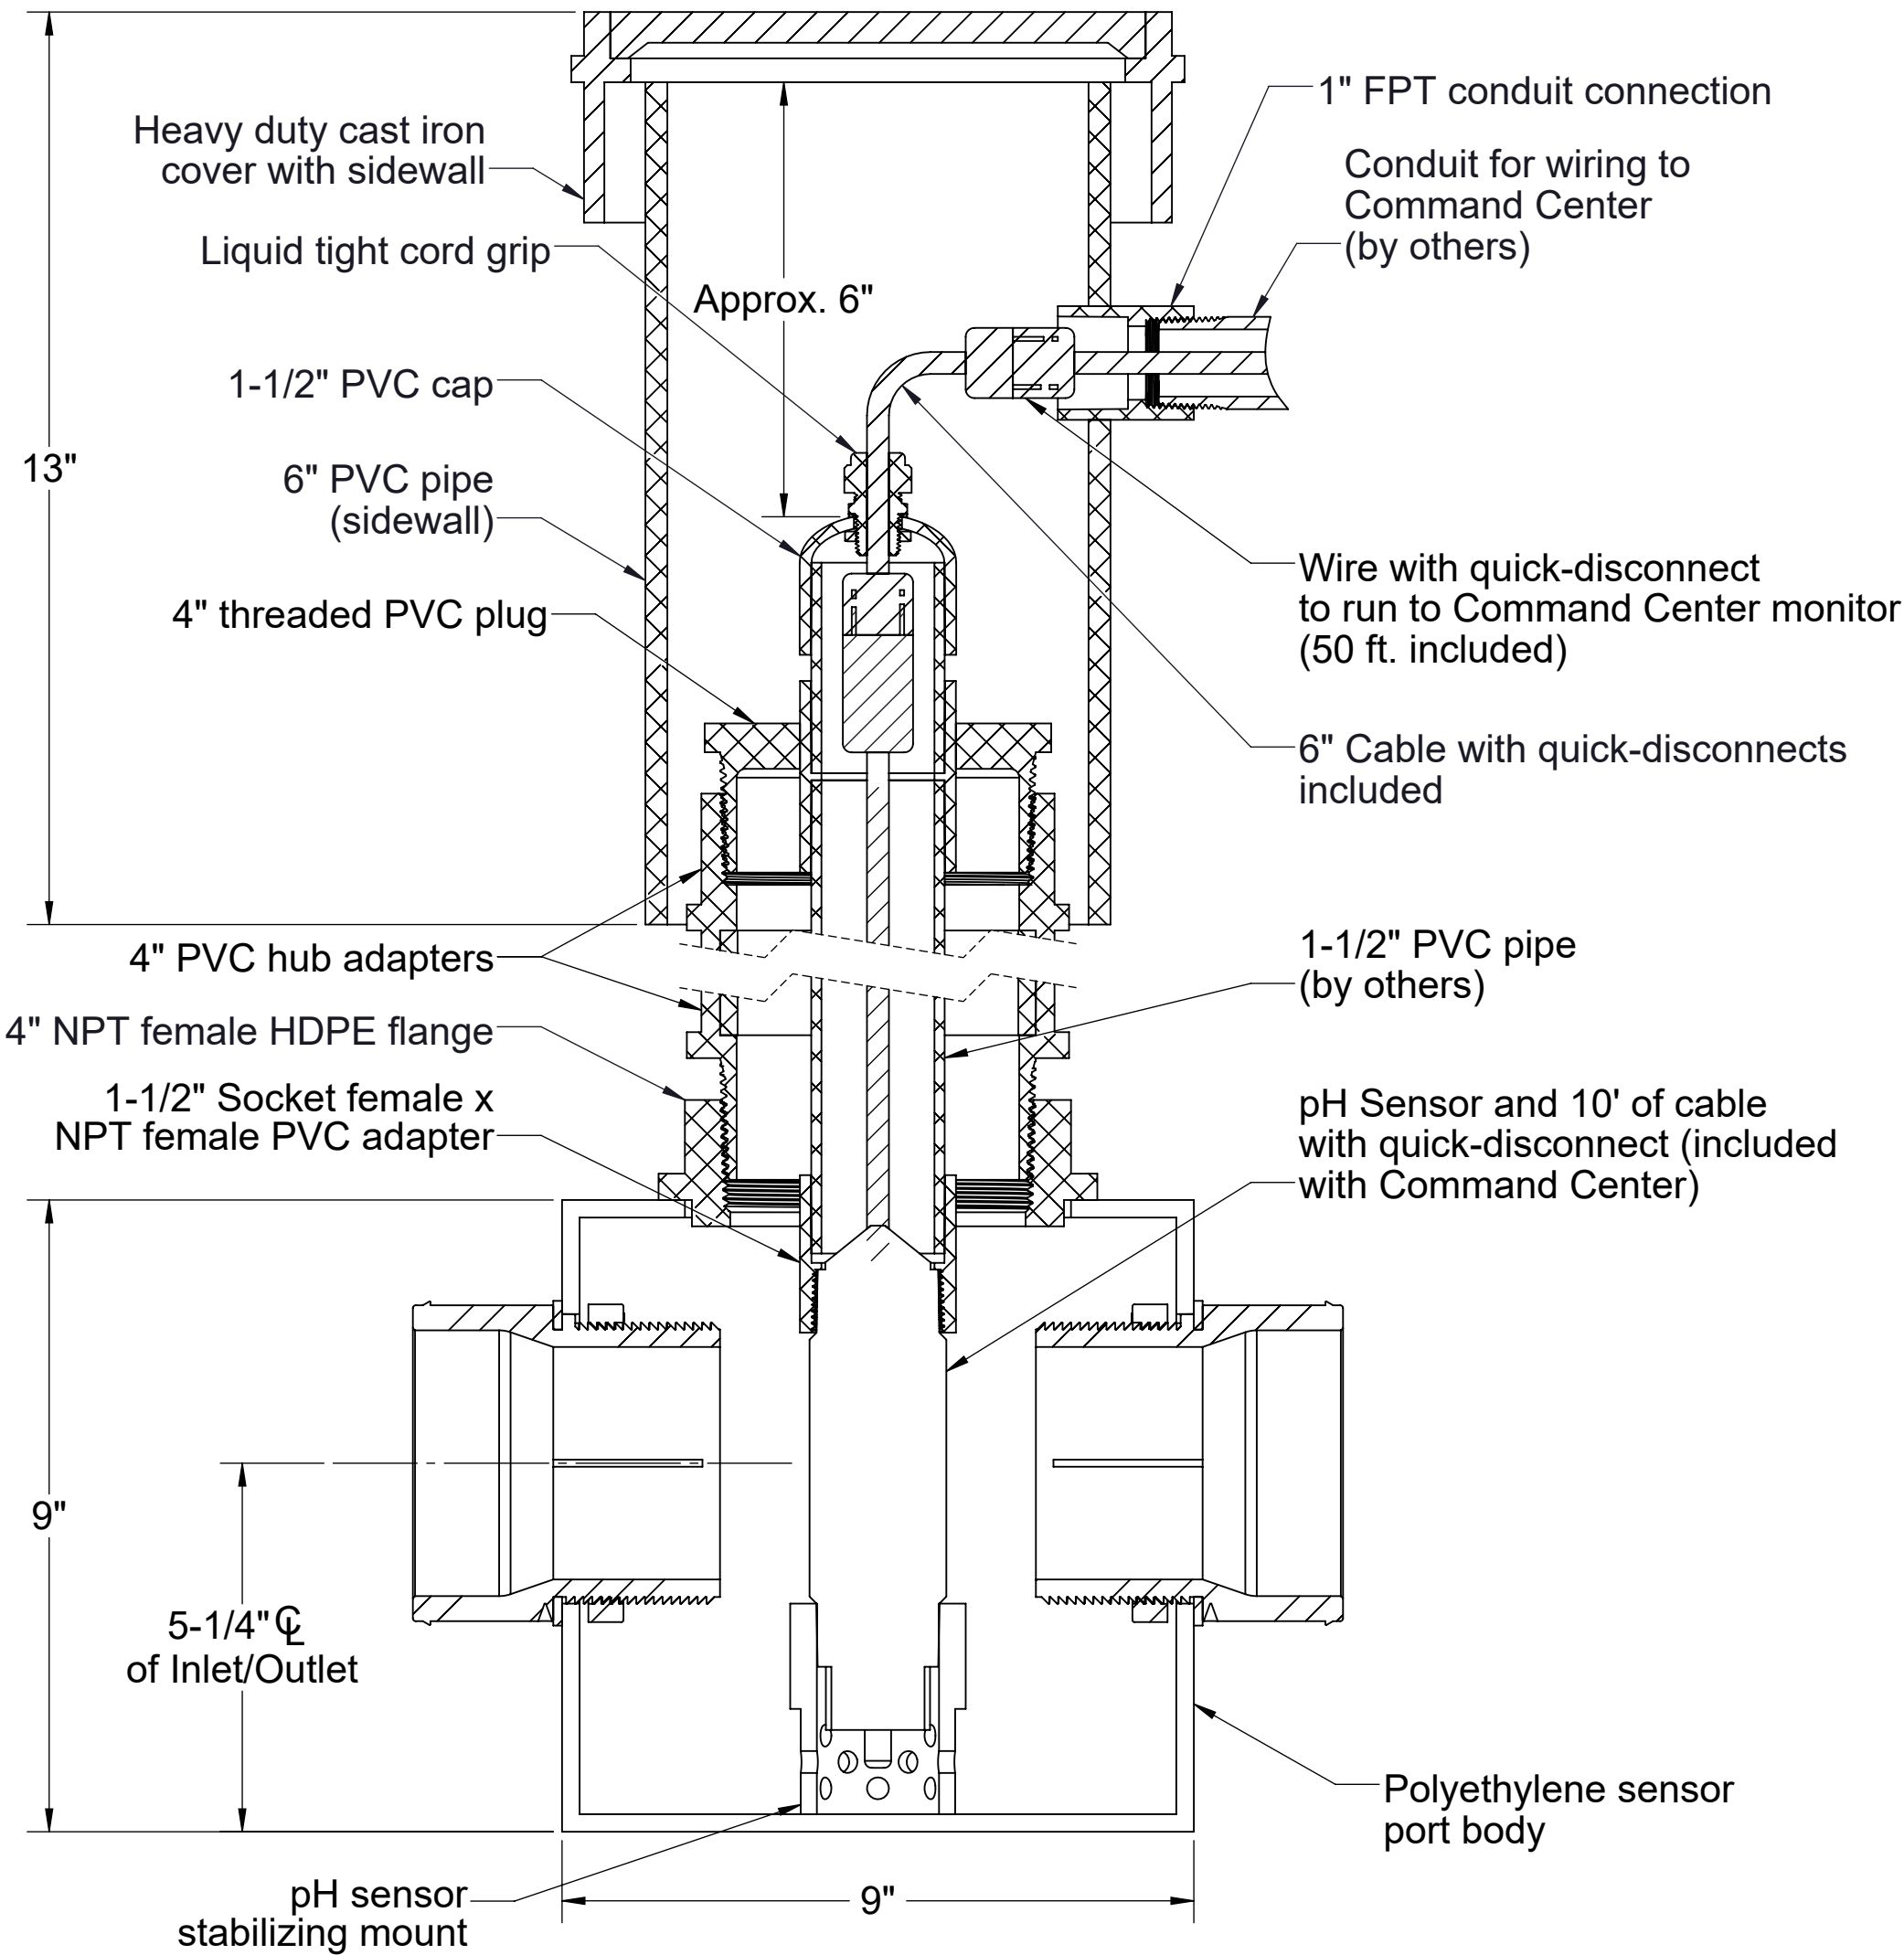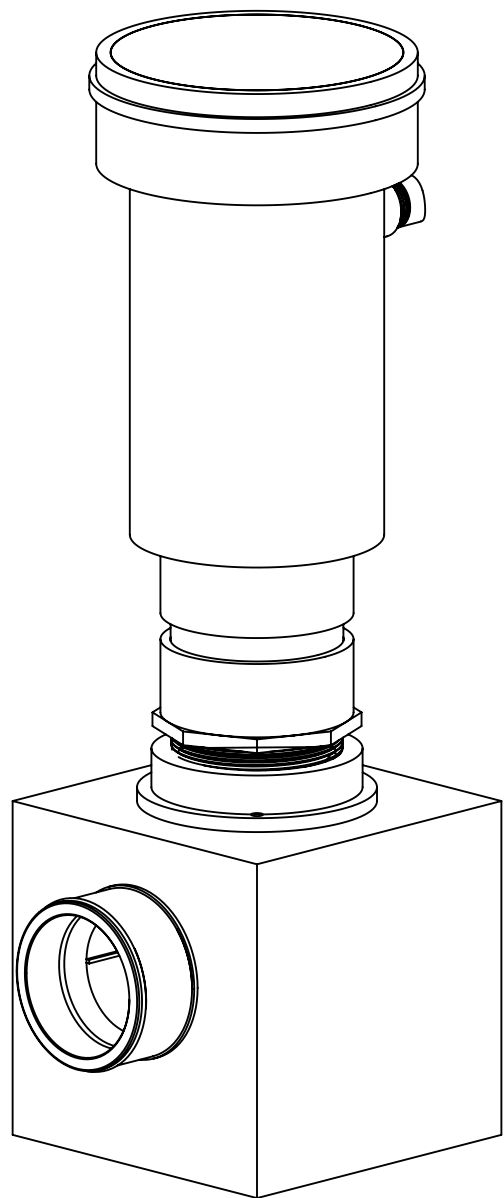

MODEL NUMBER: SPK-B

DESCRIPTION:

SENSOR PLACEMENT KIT  
FOR BELOW-GRADE USE

DWG BY: ENG    DATE: 10/31/2023    REV: 0

SPECIFICATION SHEET

Striem  
Kansas City, KS  
Tel: 913-222-1500  
orders@striemco.com  
www.striemco.com

Made in the U.S.A

