


SPECIFICATIONS

- 1. Polyethylene construction.
- 2. Liquid capacity: 2 Gallons (1-1/2"), 1.8 Gallons (2").
- 3. 1-1/2" or 2" FPT connections standard (polypropylene bushings included).
- 4. 3" gasketed top access port.
- 5. Built-in sewer gas trap.
- 6. Bottom of tank must be supported if not sitting on floor. Support must hold at least 50 lbs.
- 7. 25-pound limestone capacity (sold separately, Model # LS-25).
- 8. Unit weight: 6 lbs (dry), 25 lbs (wet), 40 lbs (wet, with limestone).
- 9. Uses: Neutralization (w/ limestone) or dilution (no limestone).

ENGINEER SPECIFICATION GUIDE

Striem Lab Rat neutralization tank model LB-2-ADA shall be lifetime guaranteed and Made in USA of seamless, rotationally-molded polyethylene with minimum 1/4" uniform wall thickness. Tank shall be furnished with inlet/outlet connection for 1-1/2" or 2" drain line pipe size. Tank shall be furnished with 3" top clean-out connection. Tank shall be watertight up to 36" head and contain an internal sewer gas trap.

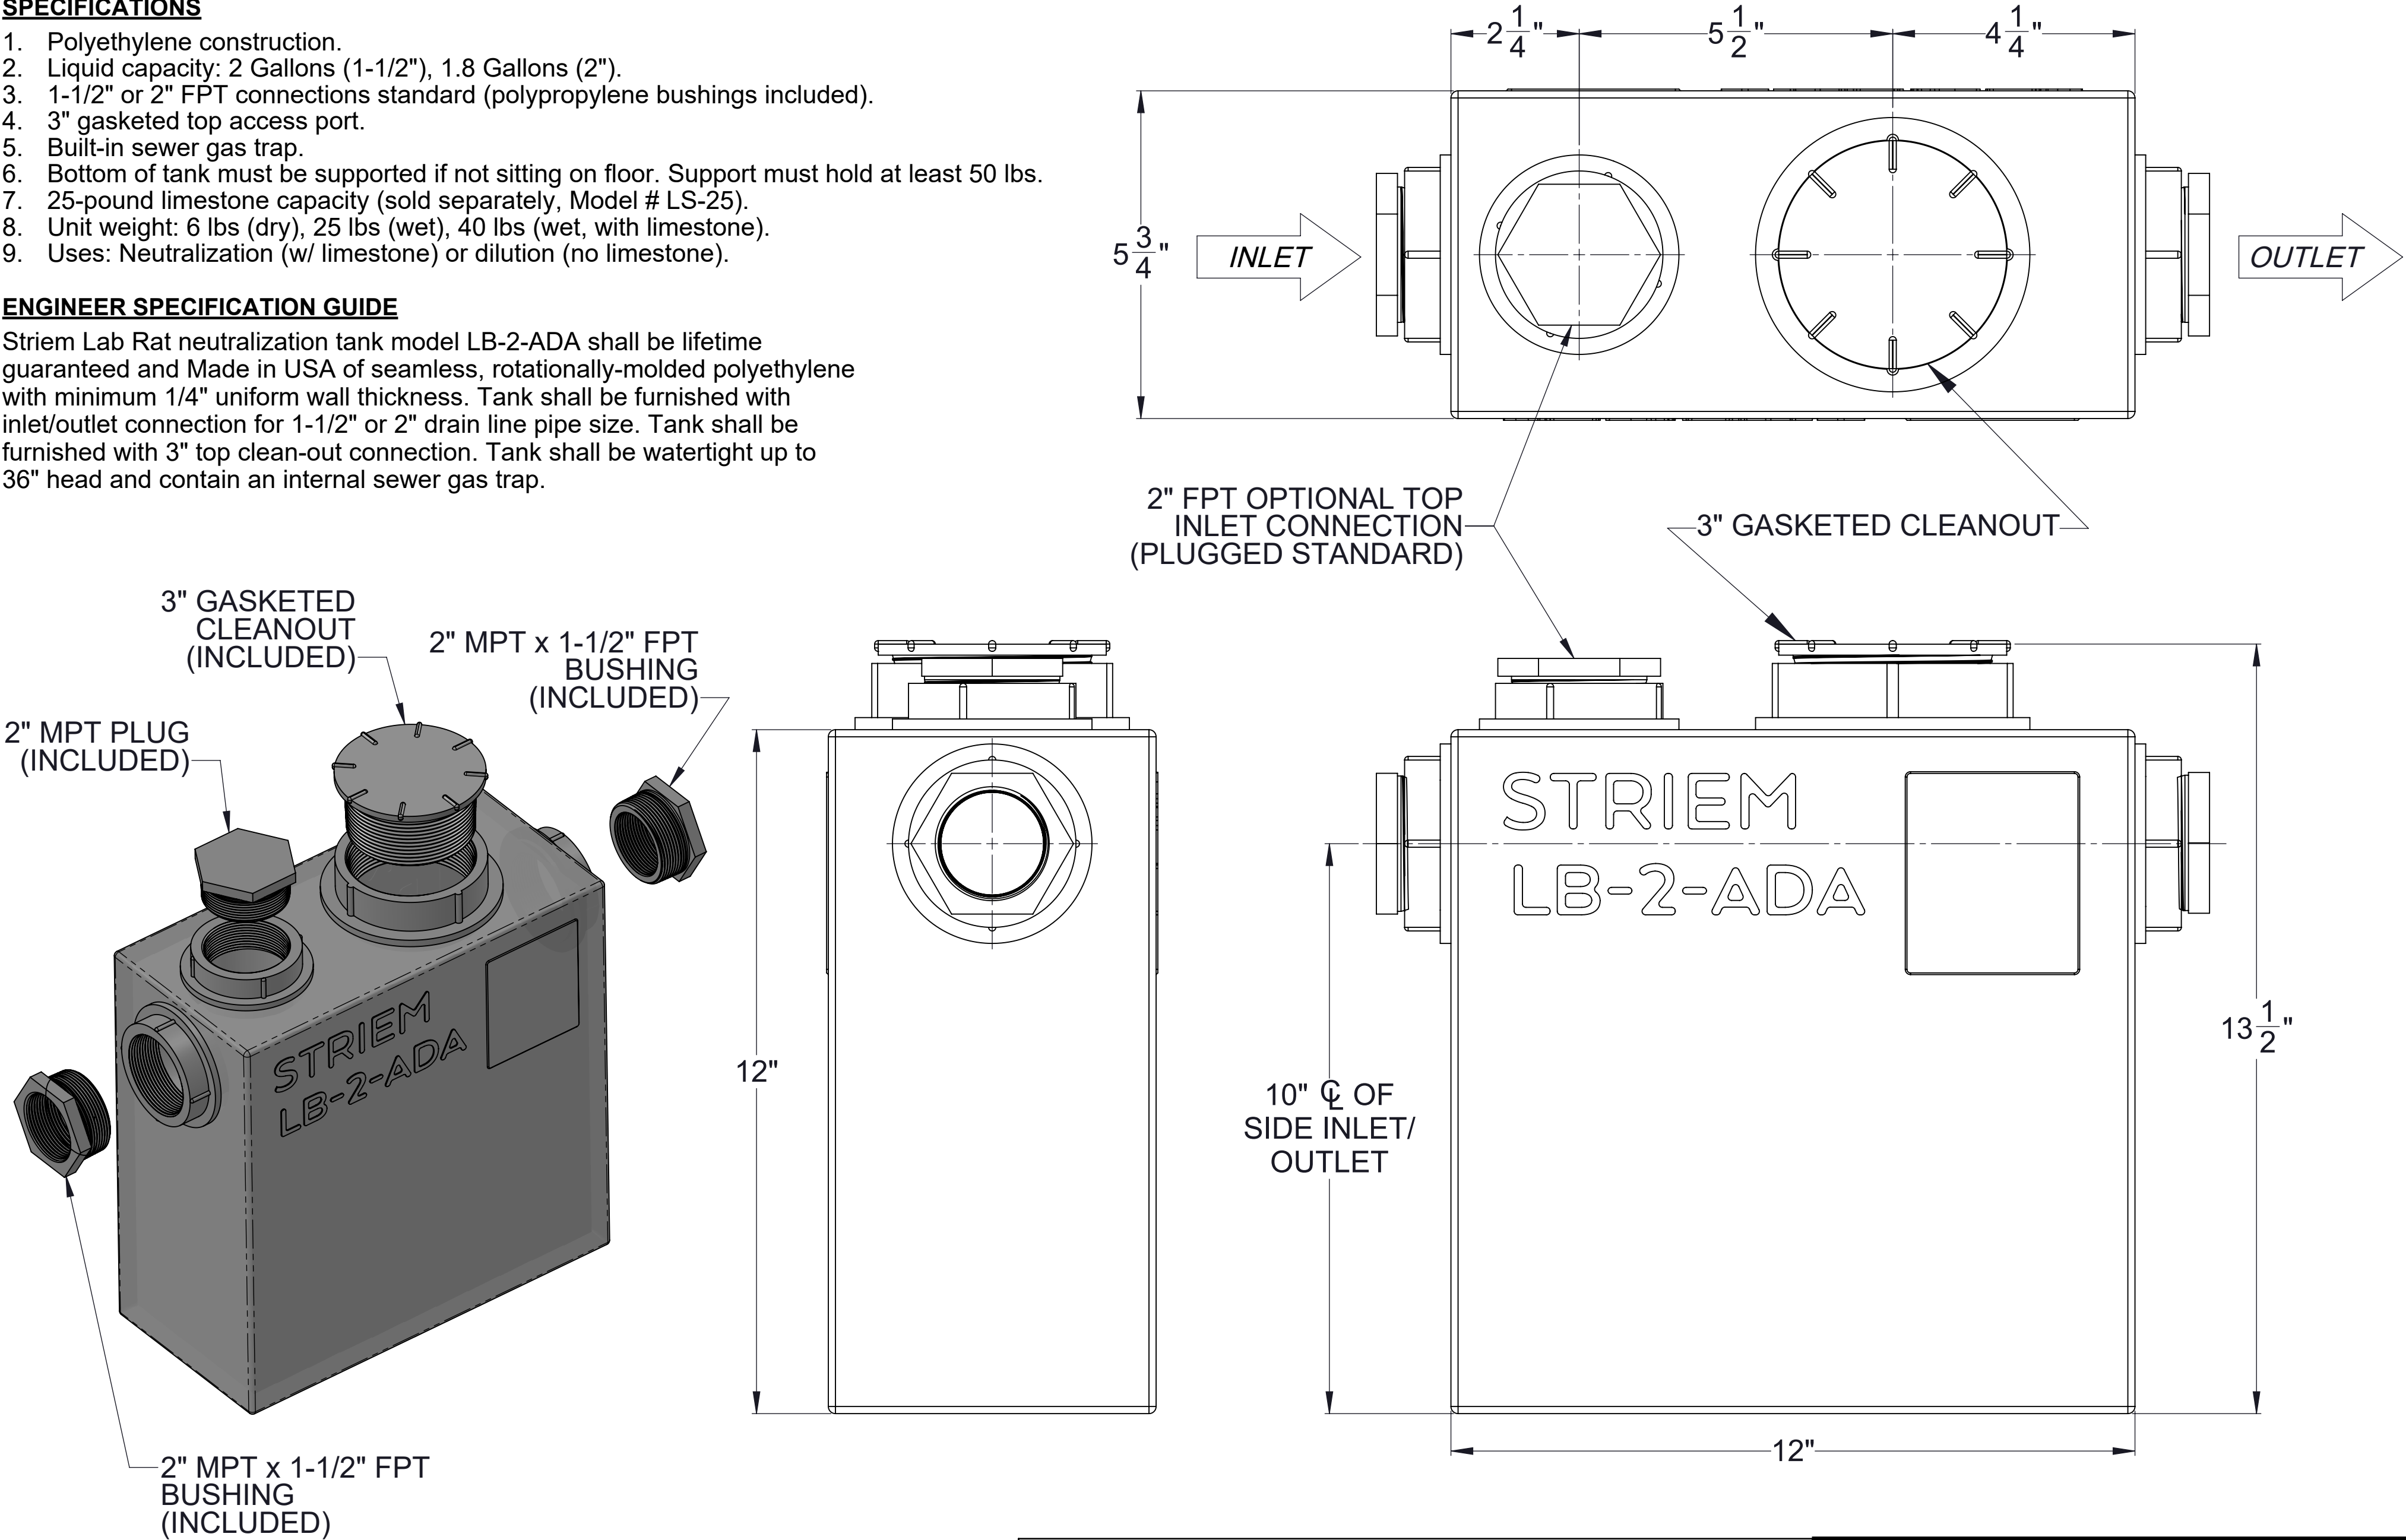

MODEL NUMBER: LB-2-ADA				SPECIFICATION	
DESCRIPTION:  POINT OF USE NEUTRALIZATION TANK FOR ADA SINK				<div>Striem 3100 Brinkerhoff Kansas City, KS 66115 Tel: 913-222-1500 orders@striemco.com www.striemco.com</div> <div>Made in the U.S.A</div>	
DWG BY: RS	DATE: 1/18/22	REV: -	ECO: ---		

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.