

SPECIFICATIONS

- 1. 3" Plain end vents standard.
- 2. Max flow rate: 314 GPM
- 3. Liquid capacity: 562 Gallons (75 cu. ft.)
- 4. Oil capacity: 470 Gallons
- 5. Unit weight w/std. covers: 1000 lbs.
- 6. H2O rated cast iron covers.
- 7. Maximum operating temperature 140 °F continuous.
- 8. For buried applications only.

NOTES

- 1. 7/8" thick high density polyethylene walls.
- 2. Unit supplied with built-in adapter(s) for up to 5" of adjustability. Additional riser(s) available for deeper burial depth.
- 3. For buried applications.
- 4. Lifting lug set included for easy install.

ENGINEER SPECIFICATION GUIDE

Striem oil separator model OS-500-WSSC shall be lifetime guaranteed and made in USA of High Density Polyethylene. Separator shall be furnished for below grade installation with field adjustable riser system. Separator flow rate shall be 314 GPM. Separator oil capacity shall be 470 gallons.

OPTIONS





- ☐ 4M - 4" Male Thread Inlet / Outlet
- ☐ 4P - 4" Plain End Inlet / Outlet

RISER OPTIONS

- Included : 0" - 5"
- ☐ SR24 (3) : >5" - 24"
 - ☐ LR24 (3) : >24" - 39"
 - ☐ SR24 (6) : >39" - 43"
 - ☐ SR24 (3) + LR24 (3) : >43" - 58"
 - ☐ LR24 (6) : >58" - 72"
 - ☐ SR24 (6) + LR24 (3) : >72" - 90"
 - ☐ LR24 (9) : >90" - 106"
- OR -
- ☐ CPRK (3) : >11" - 106"
 - Corrugated Pipe Riser Kit.
 - 18" diameter corrugated pipe by others.
 - See CPRK specification for more detail.

ADDITIONAL OPTIONS

- ☐ HDK-1500 : High Water Table Hold Down Kit

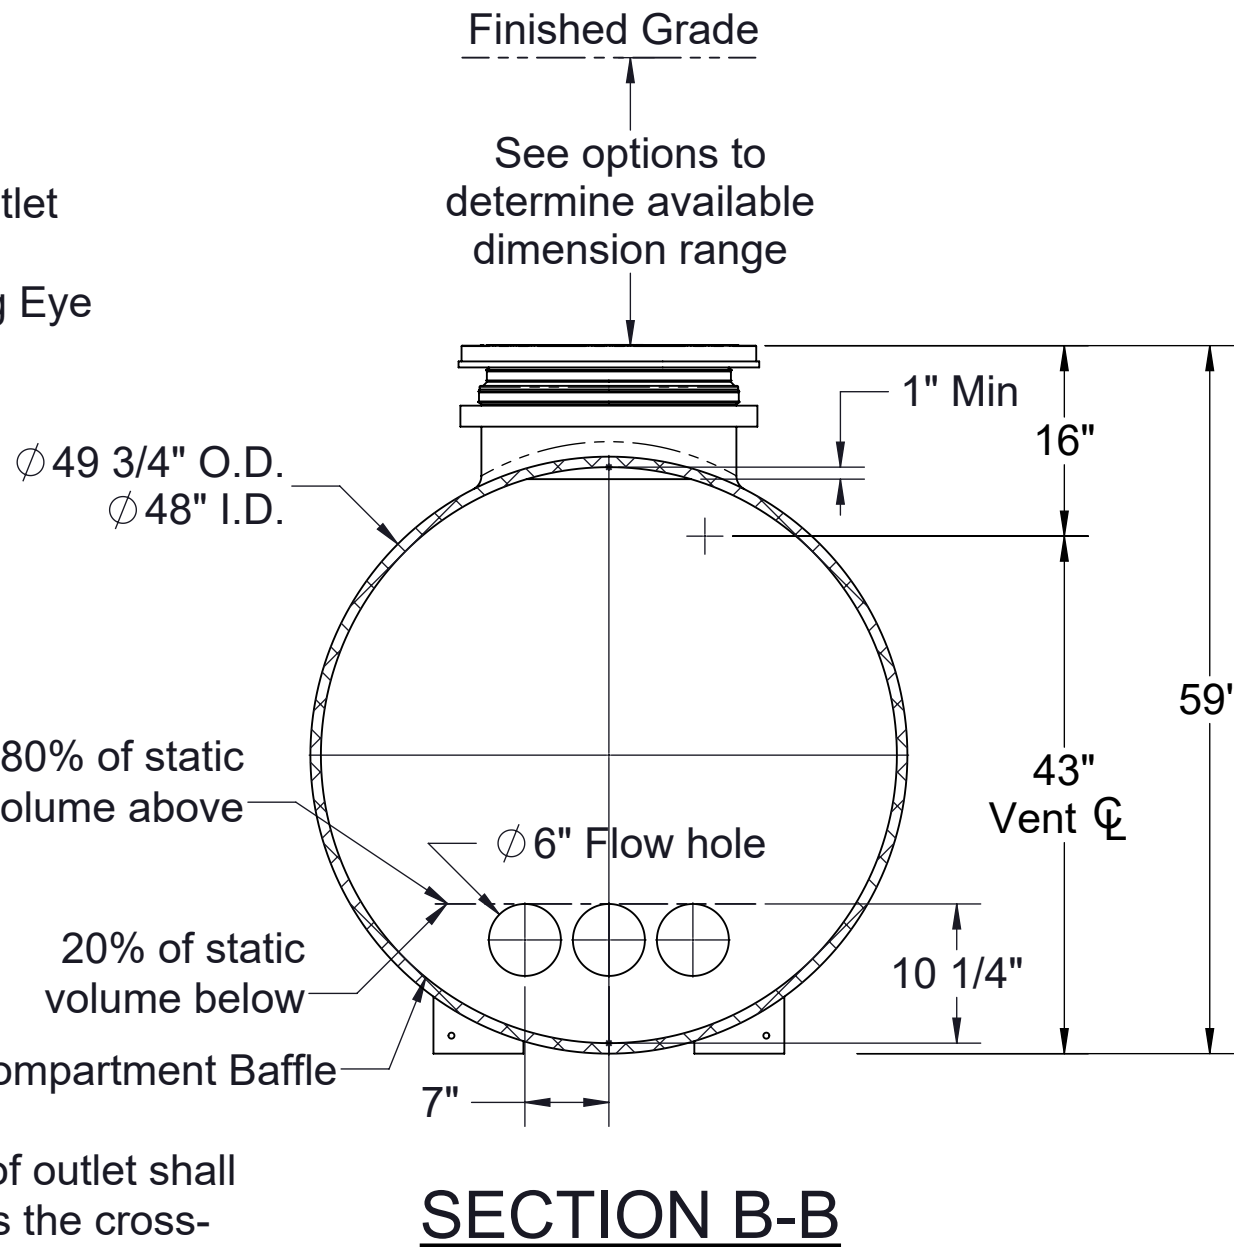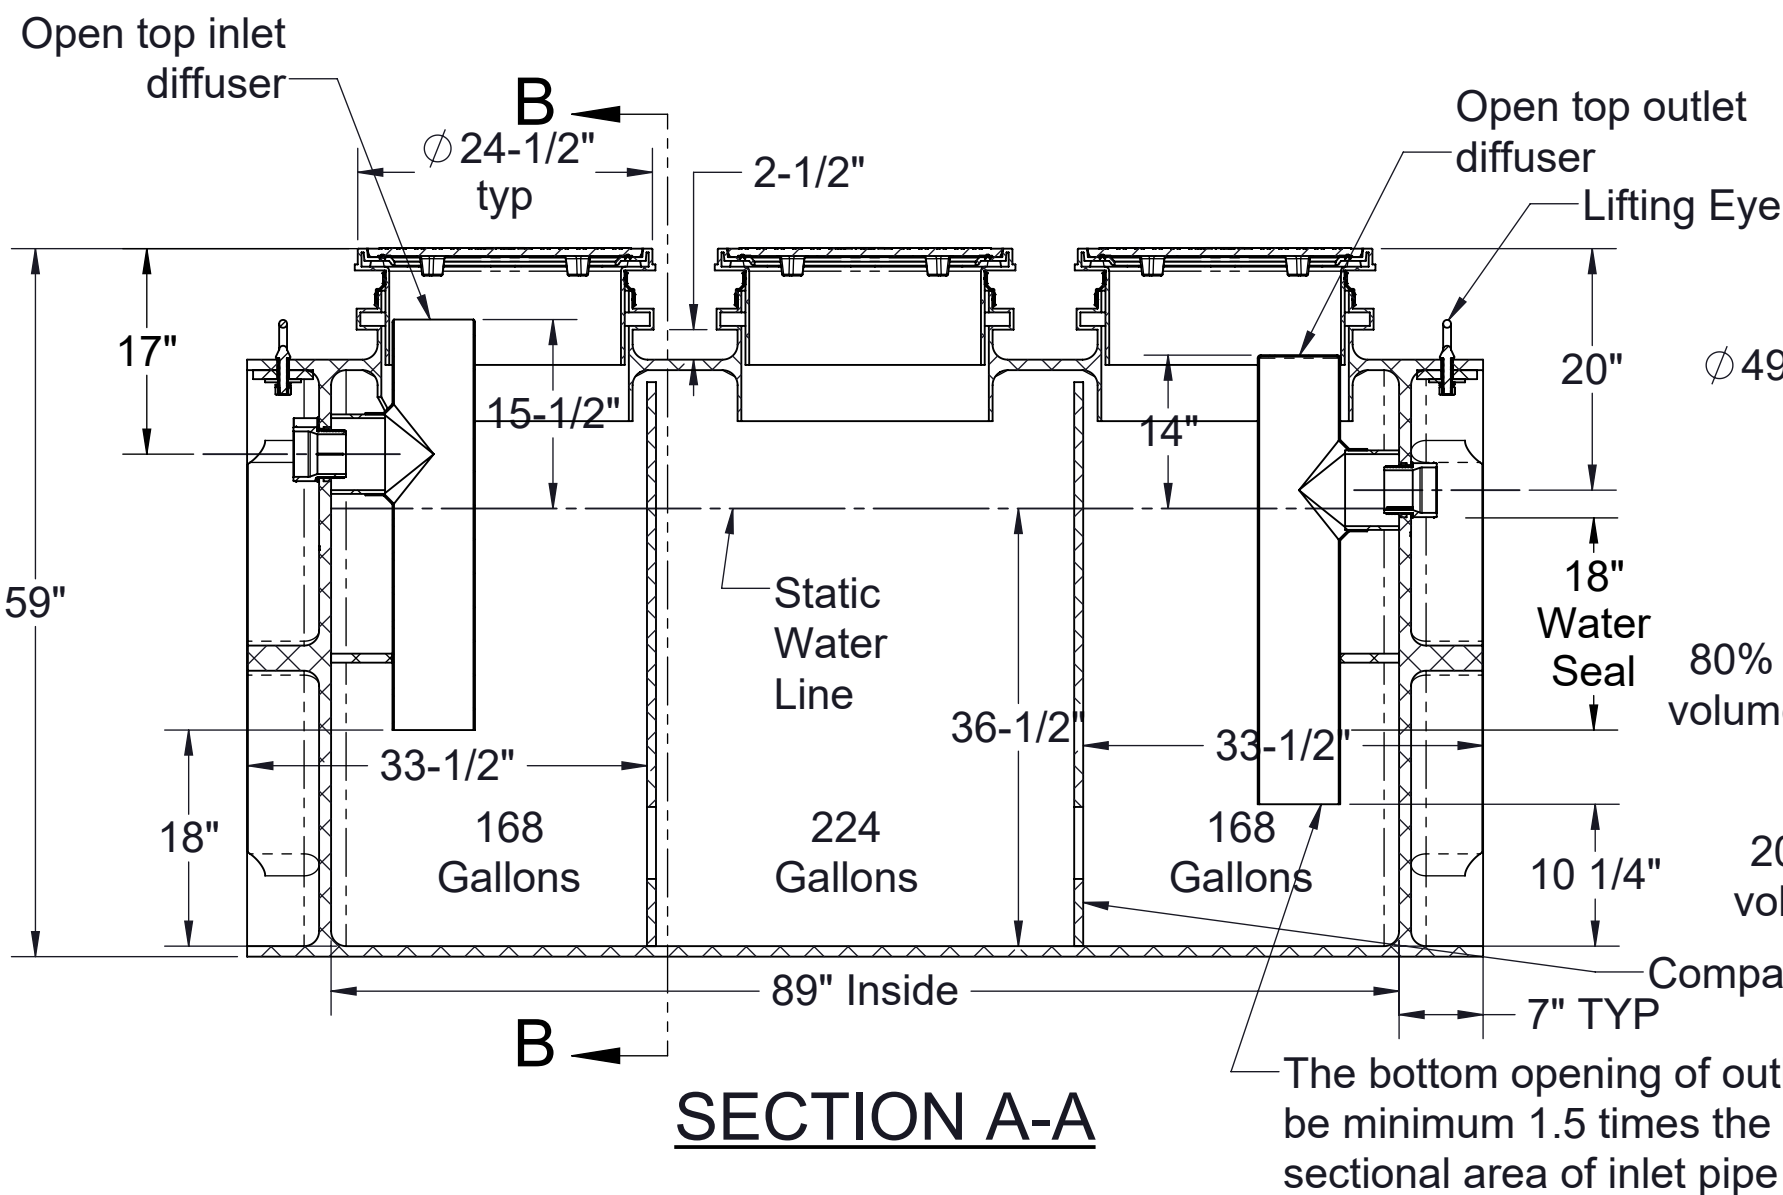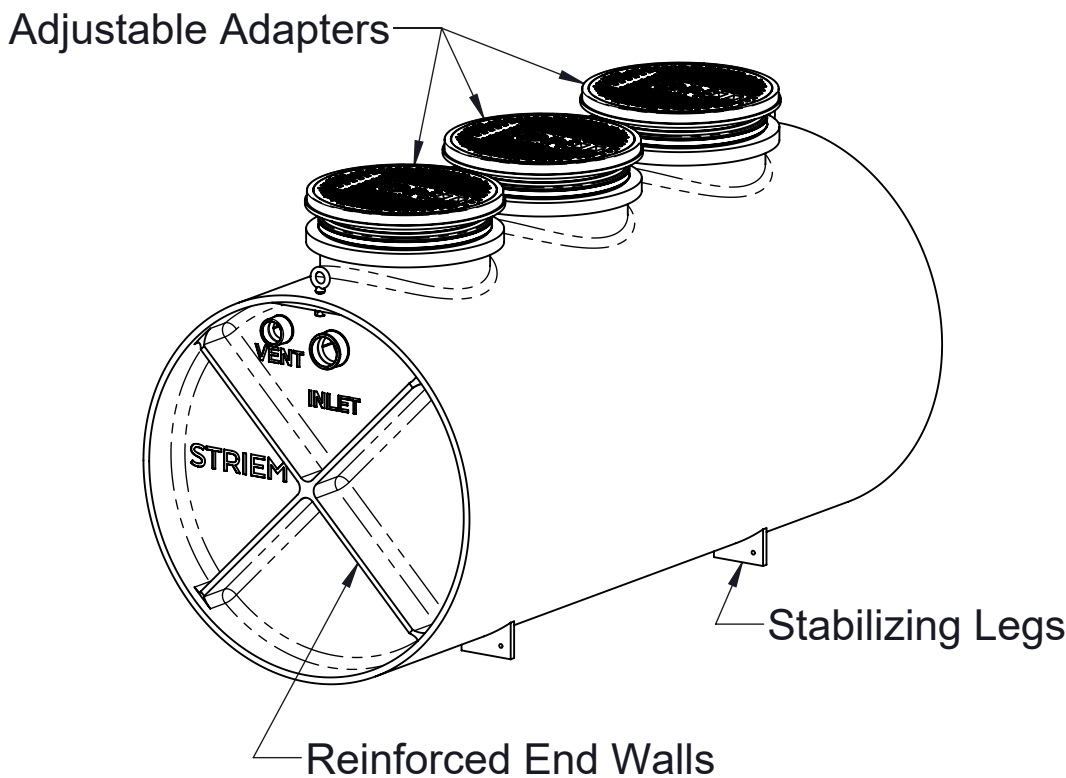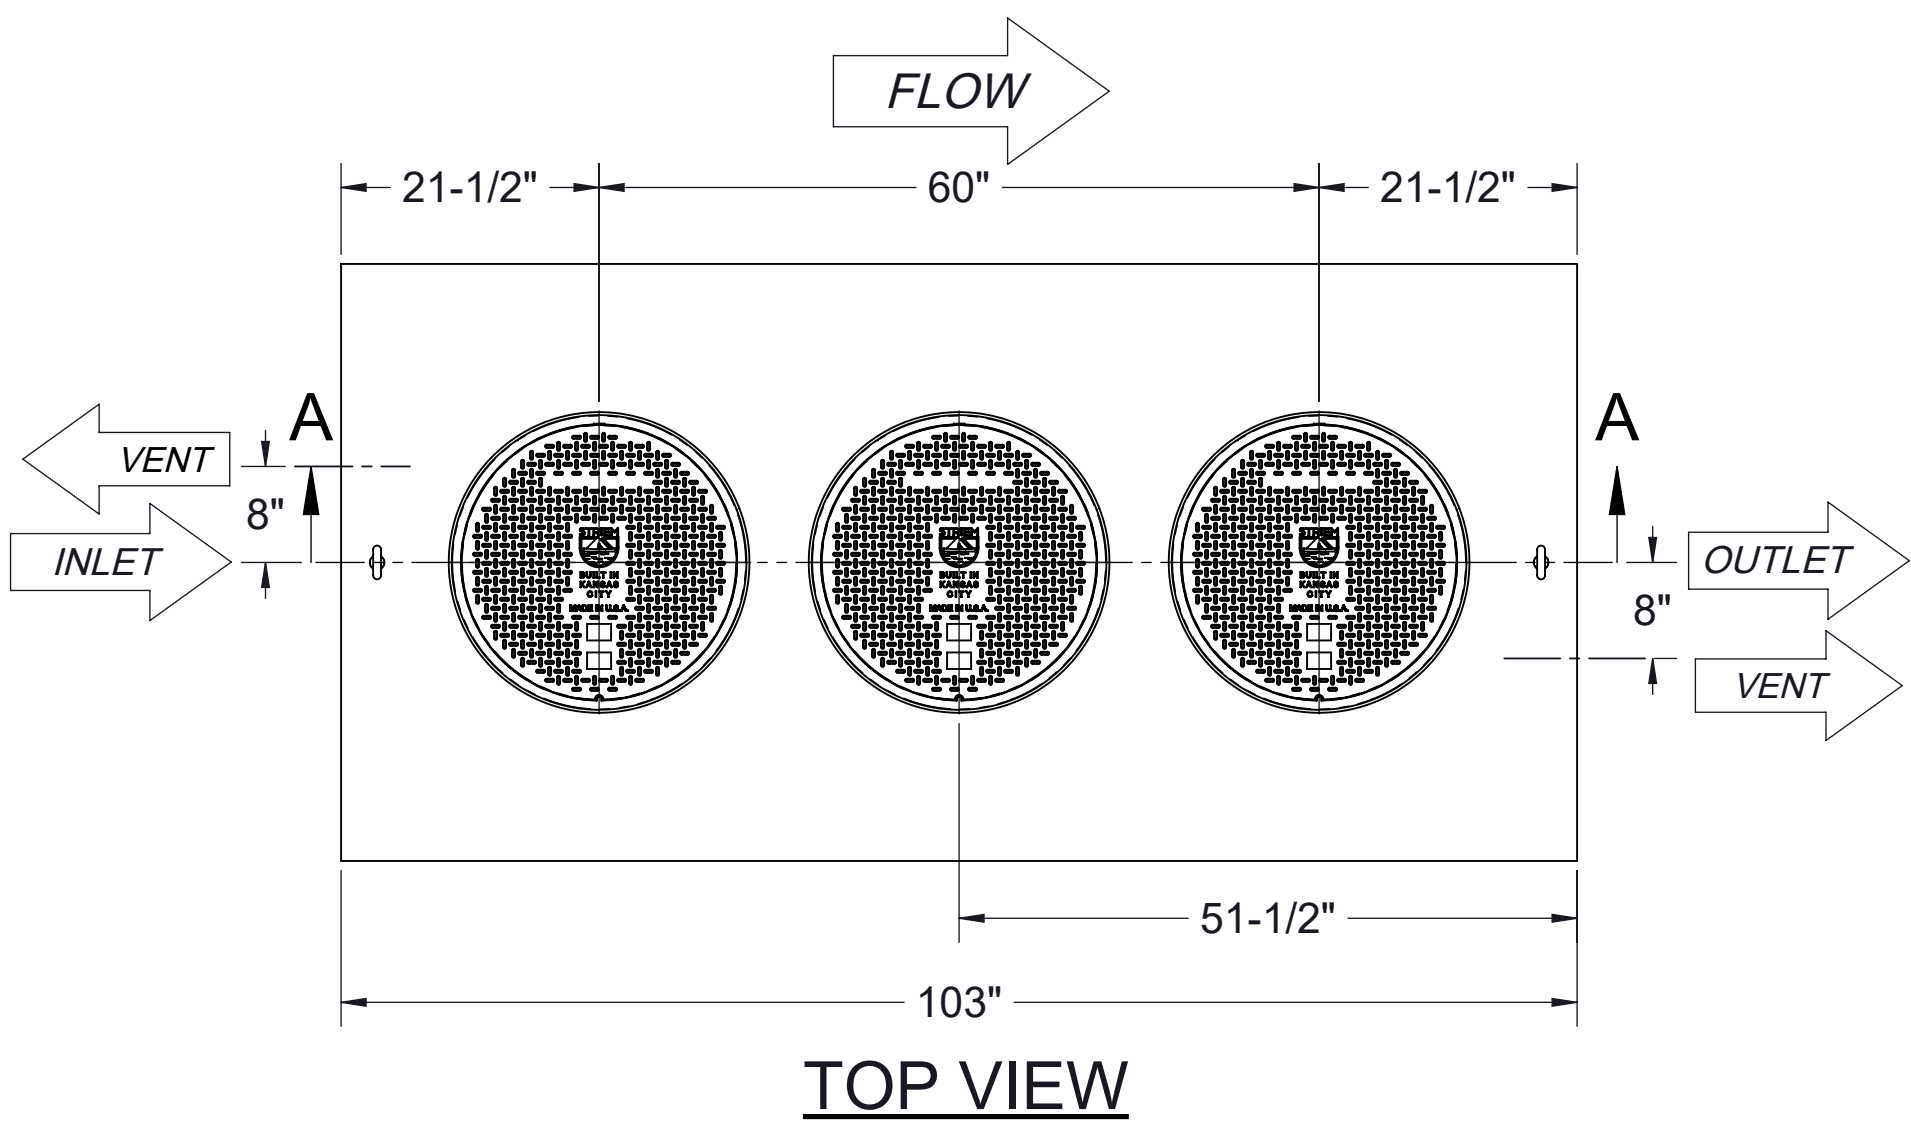

Signature of Approval: _____

Company: _____

Date of Approval: _____

Specifying Engineer: _____

Engineering Firm: _____

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

Approved by WSSC

MODEL NUMBER: OS-500-WSSC			
DESCRIPTION:			
POLYETHYLENE OIL SEPARATOR 314 GPM 562 GALLON CAPACITY			
DWG BY: RS	DATE: 3/31/21	REV: 0	ECO:

SPECIFICATION SHEET

Striem
3100 Brinkerhoff
Kansas City, KS 66115
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A