## **SPECIFICATIONS**

- 6" Plain End inlet/outlet shown, 3" Plain End vents standard.
- Liquid capacity: 500 gallons (67 cu. ft.).
- Unit weight: 800 lbs.
- 4. Maximum operating temperature 140°F continuous.

#### **NOTES**


- For gravity drainage applications only.
- 2. Do not use for pressure applications.
- Cover placement allows full access to tank for proper maintenance.
- 4. Lifting lug set for easy install.

## **ENGINEER SPECIFICATION GUIDE**


Striem neutralization tank model LB-500 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene with 7/8" nominal wall thickness. Tank shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Tank liquid holding capacity shall be 500 gallons. Cover shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

#### THIRD PARTY STRUCTURAL ANALYSIS

The structural design of the LB-500 has been approved and stamped by a third-party structural engineer for direct burial in accordance with Striem's installation instructions.

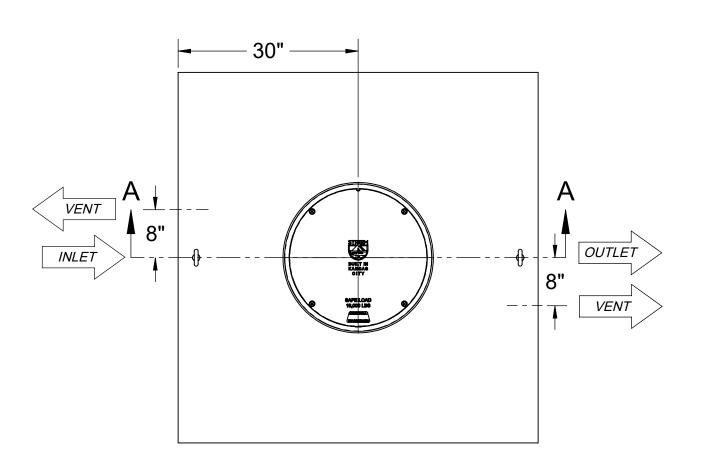


**TOP VIEW** 

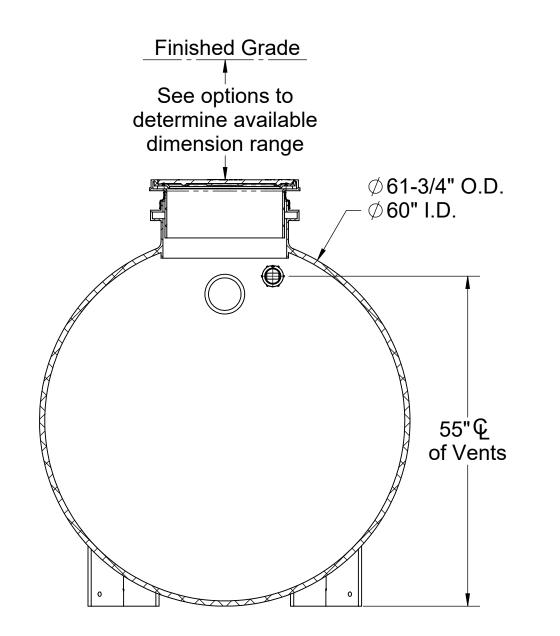

provide sewer gas trap-Ø 24-1/2" **→** Lifting Lug-17" 19" 18" Water Seal 71" 54"Q 52"Q of Inlet of Outlet 46" Inside 60" Outside

**SECTION B-B** 



PO IS NON-CANCELABLE **ORDER IS NON-**RETURNABLE

Closed top diptube to

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

**MODEL NUMBER:** 

**DESCRIPTION:** 

LAB BASIN™ POLYETHYLENE NEUTRALIZATION TANK **500 GALLON CAPACITY** 

# **SPECIFICATION SHEET**

**OPTIONS** 

CPRK: 11" - 106" (See specification for more detail.)

■ SPK-A: Above-Grade Sensor Placement Kit\*

SPK-B: Below-Grade Sensor Placement Kit\*

Limestone: 90%+ Calcium Carbonate (6,500 lbs.)

☐ **CC-1:** Command Center pH Monitoring Package

☐ **HDK-8:** High Water Table Hold Down Kit

SELECTION

REQUIRED

**Connection Options (Plain End Only)** 

Inlet / Outlet

**Riser Options** 

From Factory: Up to 5"

Up to 24": **SR24** 

Up to 39": LR24

Up to 43": **SR24** (2)

Up to 72": **LR24** (2)

Up to 106": **LR24** (3)

Up to 58": **SR24** + **LR24** 

Up to 90": **SR24** + **LR24** (2)

**4"** 

□ 6"

**8**"

- OR -

**Additional Options** 

\*Required with CC-1

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A



**DWG BY:** ENG

DATE:

**SECTION A-A** 

8/25/2023

LB-500

**REV**: