




WSSC OIL SEPARATOR SELECTION GUIDE

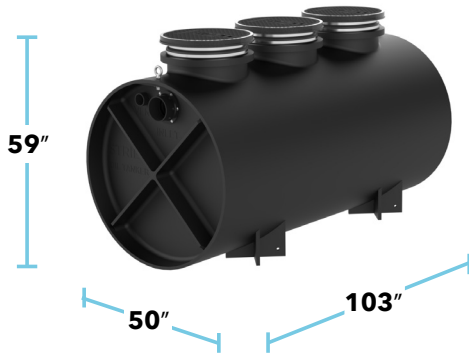

SMALL INTERCEPTOR


OS-500-WSSC

LIQUID CAPACITY: 562 GAL.

OIL CAPACITY: 470 GAL.

UNIT WEIGHT: 1,025 LBS.

COVERS: H-20 rated pickable cast iron

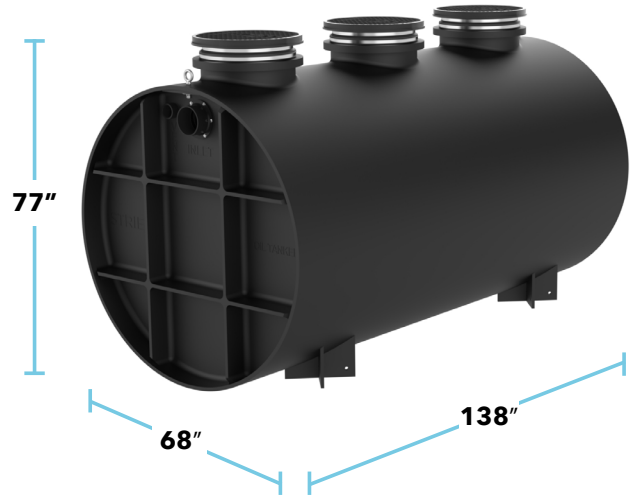

LARGE INTERCEPTOR

OS-1600-WSSC

LIQUID CAPACITY: 1,615 GAL.

OIL CAPACITY: 1,231 GAL.

UNIT WEIGHT: 1,800 LBS.

COVERS: H-20 rated pickable cast iron

OPTIONS

- SR/LR field-adjustable extensions
- Corrugated Pipe Riser Kit (CPRK)
- High water hold down kits
- Slick Stick™ oil level monitoring system

SPEC FORMATS



*AVAILABLE ONLINE FOR ALL PRODUCTS







913-222-1500 HELP@STRIEMCO.COM
STRIEMCO.COM





WSSC OIL SEPARATOR SELECTION GUIDE

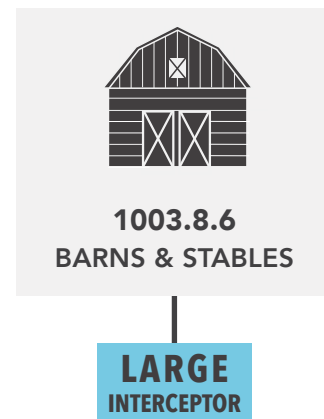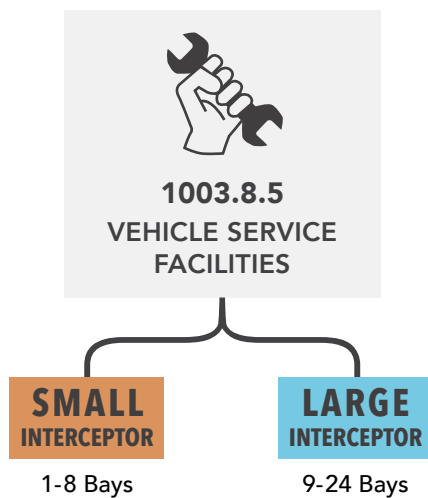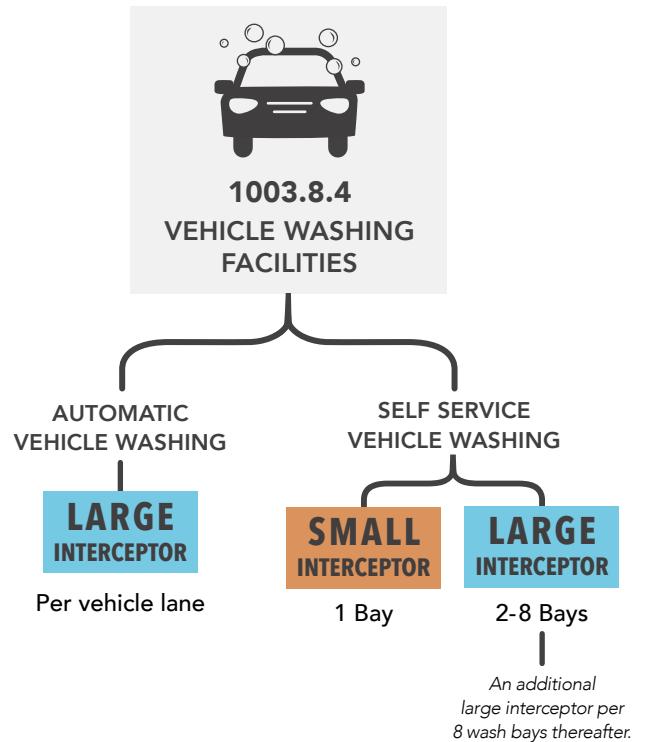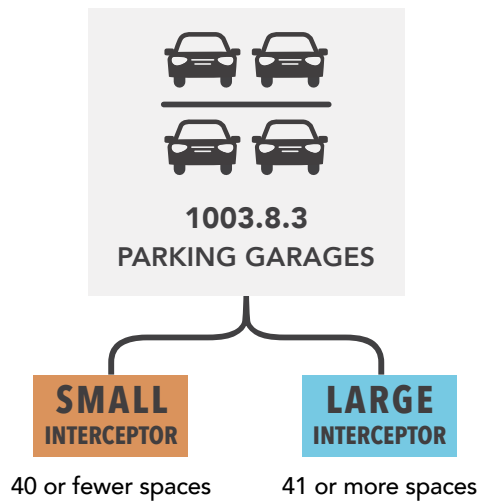

For other applications that are not covered in WSSC 1003.8,
please contact Striem or Virginia Maryland Associates.

913-222-1500 HELP@STRIEMCO.COM

STRIEMCO.COM



LOCAL REP: Virginia Maryland Associates

CONTACTS: Michael Duke, 804-314-8375 | michaelduke@verizon.net
Matt Bieganski, 702-994-0531 | mattb@vamdassociates.com

