





WSSC OIL SEPARATOR SELECTION GUIDE

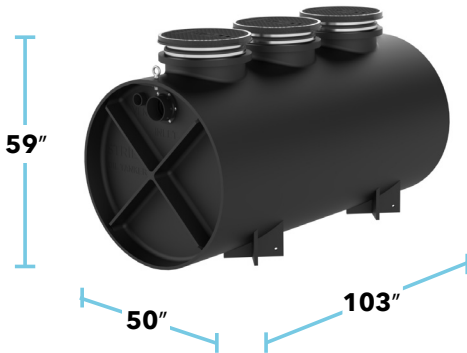

SMALL INTERCEPTOR

OS-500-WSSC

LIQUID CAPACITY: 562 GAL.
OIL CAPACITY: 470 GAL.
UNIT WEIGHT: 1,025 LBS.
COVERS: H-20 rated pickable cast iron

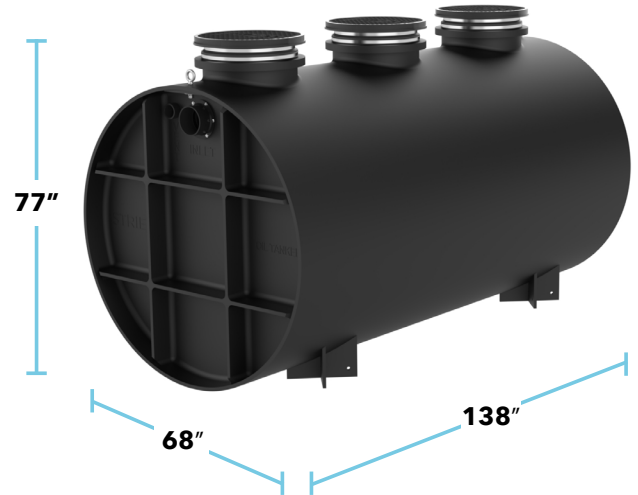

LARGE INTERCEPTOR

OS-1600-WSSC

LIQUID CAPACITY: 1,615 GAL.
OIL CAPACITY: 1,231 GAL.
UNIT WEIGHT: 1,800 LBS.
COVERS: H-20 rated pickable cast iron

OPTIONS

- SR/LR field-adjustable extensions
- Corrugated Pipe Riser Kit (CPRK)
- High water hold down kits
- Slick Stick™ oil level monitoring system

SPEC FORMATS



*AVAILABLE ONLINE FOR ALL PRODUCTS



913-222-1500 HELP@STRIEMCO.COM
STRIEMCO.COM





WSSC OIL SEPARATOR SELECTION GUIDE



**SMALL
INTERCEPTOR**

40 or fewer spaces

**LARGE
INTERCEPTOR**

41 or more spaces



**1003.8.4
VEHICLE WASHING
FACILITIES**

AUTOMATIC
VEHICLE WASHING

**LARGE
INTERCEPTOR**

Per vehicle lane

SELF SERVICE
VEHICLE WASHING

**SMALL
INTERCEPTOR**

1 Bay

**LARGE
INTERCEPTOR**

2-8 Bays

An additional
large interceptor per
8 wash bays thereafter.



**1003.8.5
VEHICLE SERVICE
FACILITIES**

**SMALL
INTERCEPTOR**

1-8 Bays

**LARGE
INTERCEPTOR**

9-24 Bays



**1003.8.6
BARN & STABLES**

**LARGE
INTERCEPTOR**

For other applications that are not covered in WSSC 1003.8,
please contact Striem or Virginia Maryland Associates.

913-222-1500 HELP@STRIEMCO.COM

STRIEMCO.COM



LOCAL REP: Virginia Maryland Associates

CONTACT: Matt Bieganski, 703-994-0531 | mattb@vamdassociates.com



★ BUILT IN ★
KANSAS CITY