

SPECIFICATIONS (SPK-B)

1. Liquid holding capacity: 1 Gallon.
2. Unit weight: 25 lbs.
3. Maximum operating temperature 140°F continuous.
4. Heavy duty cast iron cover with sidewall.

NOTES

1. For above grade placement of pH probe for CC-1 or CC-2 Command Center monitoring package.
2. For gravity drainage applications only. Do not use for pressure applications.
3. 3/8" thick seamless medium density polyethylene walls.
4. Unit for below grade installation.


OPTIONS

Connection Type

- Plain End
- Female Thread
- Flanged

Size

- 1-1/2"
- 2"
- 3"
- 4"
- 6" (Female Thread not available)

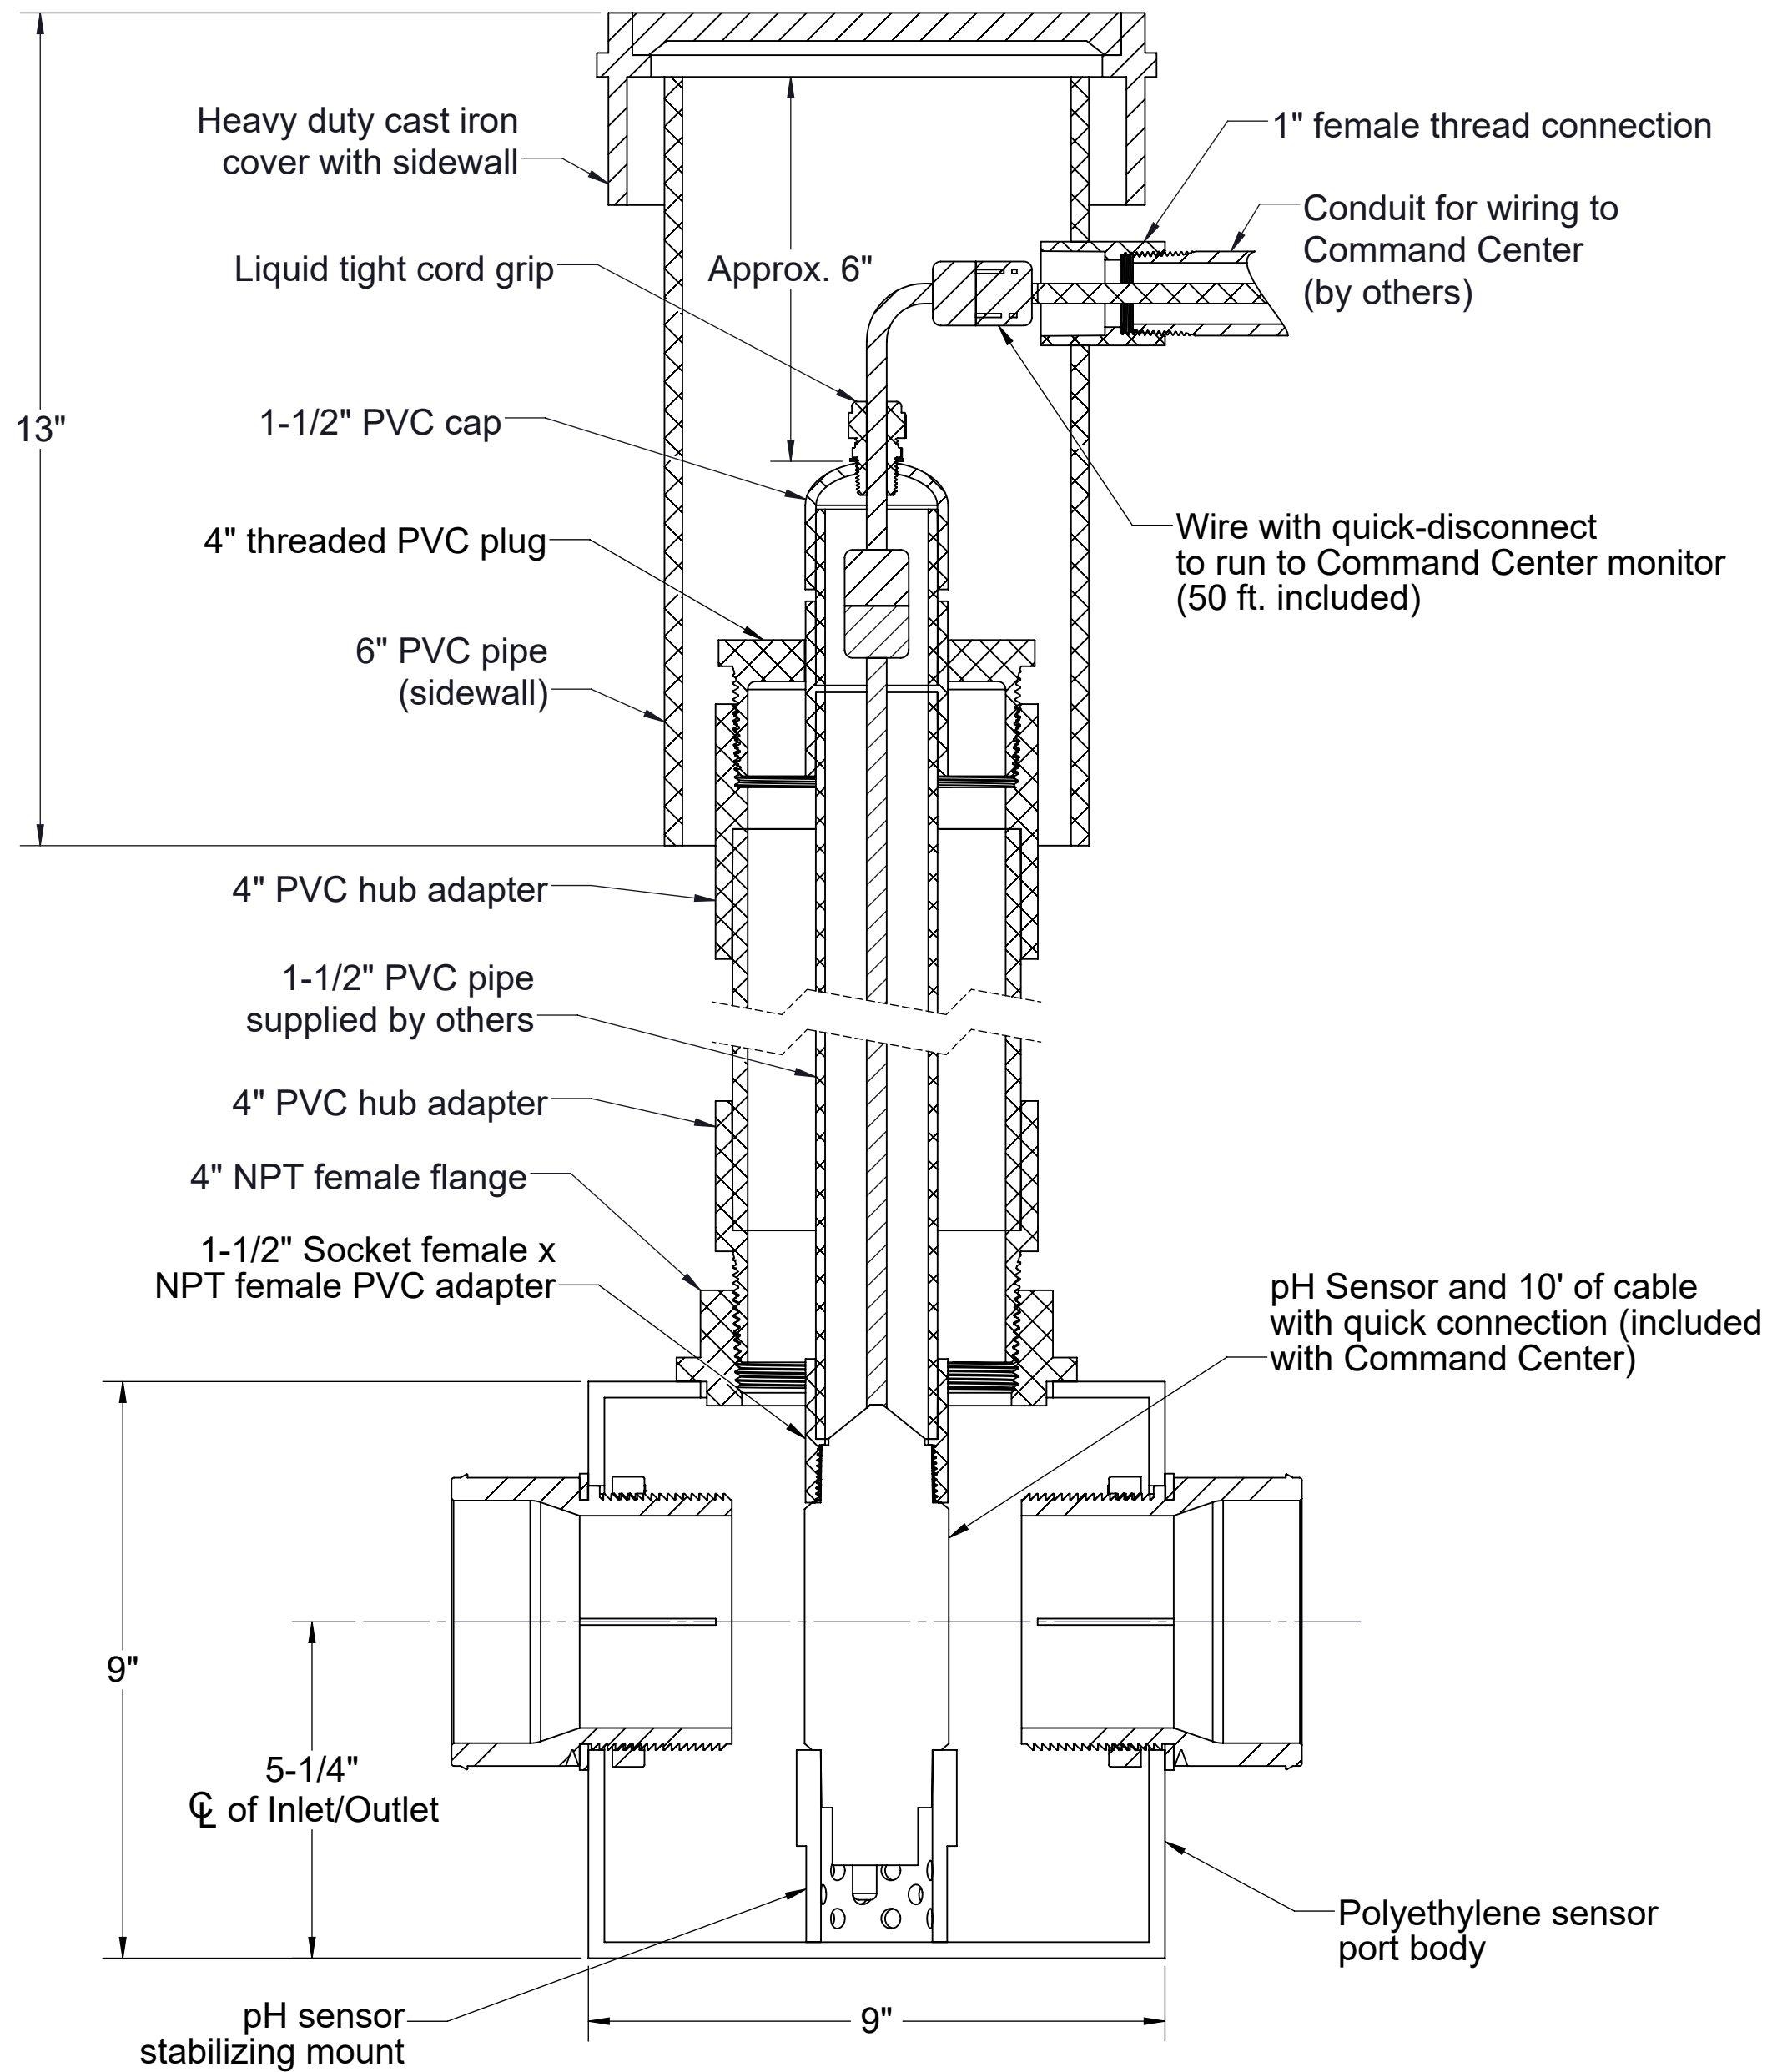

MODEL NUMBER:	SPK-B
DESCRIPTION:	BELOW GRADE pH SENSOR PLACEMENT KIT
DWG BY: MJ	DATE: 06/23/2022 REV: 0 ECO:

SPECIFICATION SHEET

Striem
 3100 Brinkerhoff
 Kansas City, KS 66115
 Tel: 913-222-1500
 orders@striemco.com
 www.striemco.com

Made in the U.S.A

