


SPECIFICATIONS


- 1. 4" Plain End inlet/outlet, 3" Plain End vents, C24-H cover standard.
- 2. Liquid capacity: 262 Gallons (35 cu. ft.).
- 3. Solids capacity: 163 Gallons (26.2 cu. ft.).
- 4. Flammable waste capacity: 89 Gallons (14.2 cu. ft.).
- 5. Unit weight w/ standard cover: 175 lbs.; w/ cast iron cover: 235 lbs.
- 6. Maximum operating temperature 140°F continuous.
- 7. Minimum burial depth: 9".
- 8. Slick Stick Oil Level Monitoring System.

ENGINEER SPECIFICATION GUIDE


Striem flammable waste trap model FWT-35-SS shall be lifetime guaranteed and made in the USA. FWT-35-SS shall be constructed of polyethylene. FWT-35-SS shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. FWT-35-SS liquid holding capacity shall be 262 gallons and flammable waste capacity shall be 89 gallons. Solids capacity shall be 163 gallons. Cover shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

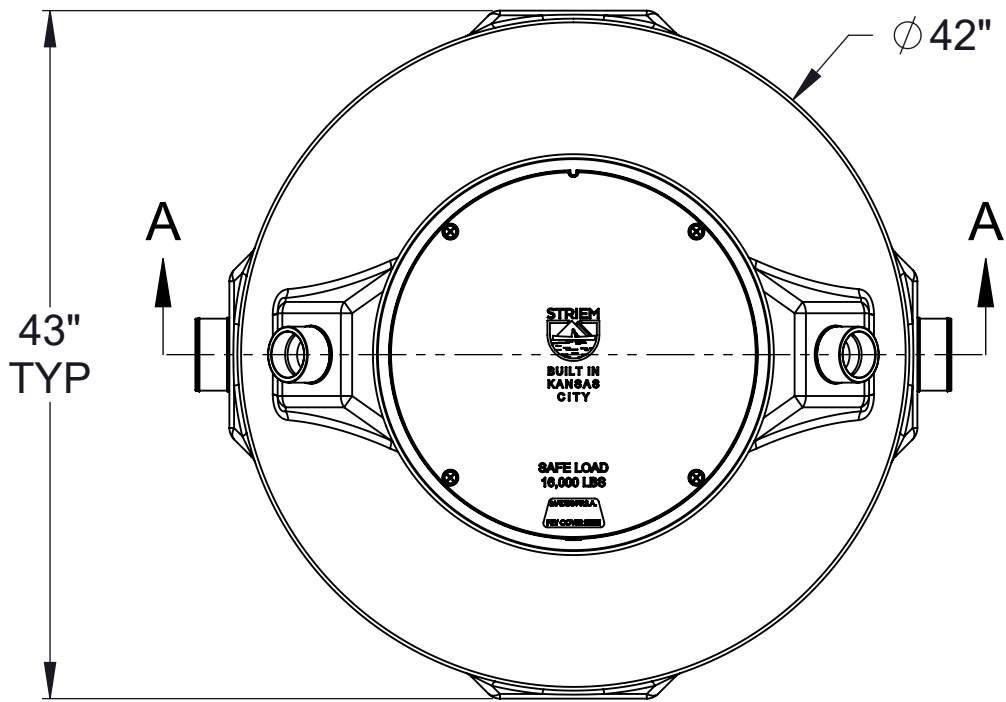


TOP VIEW

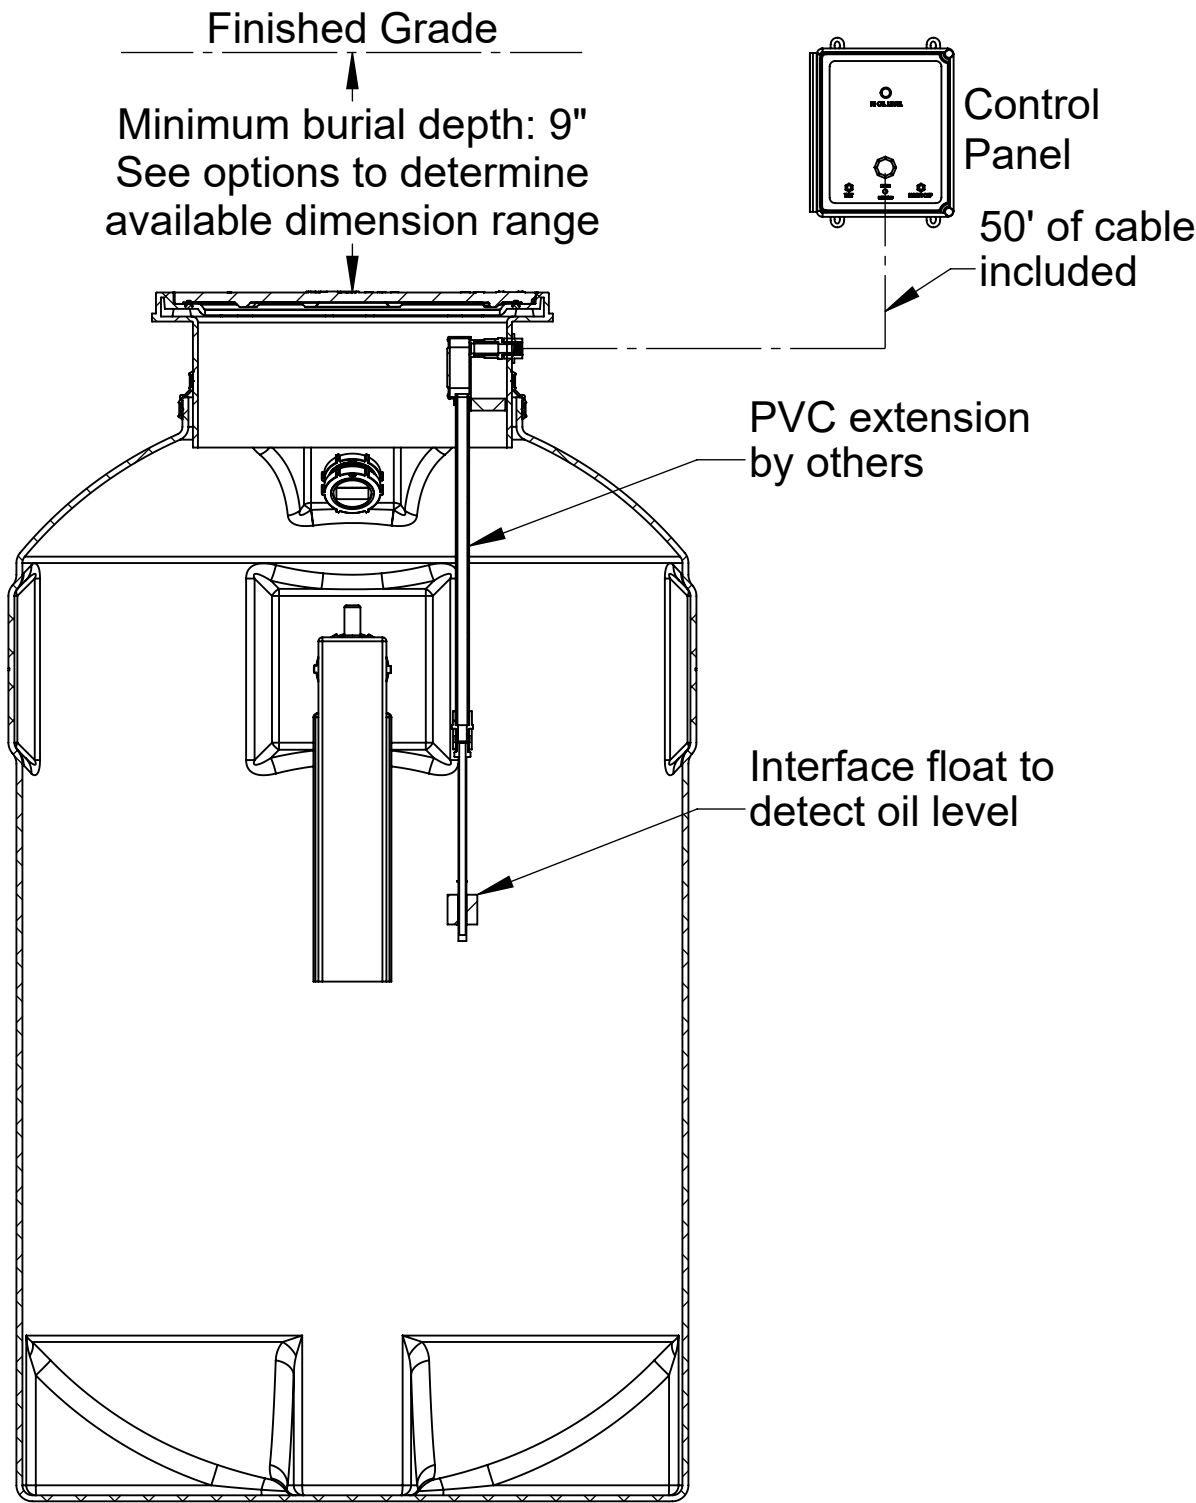

SECTION B-B

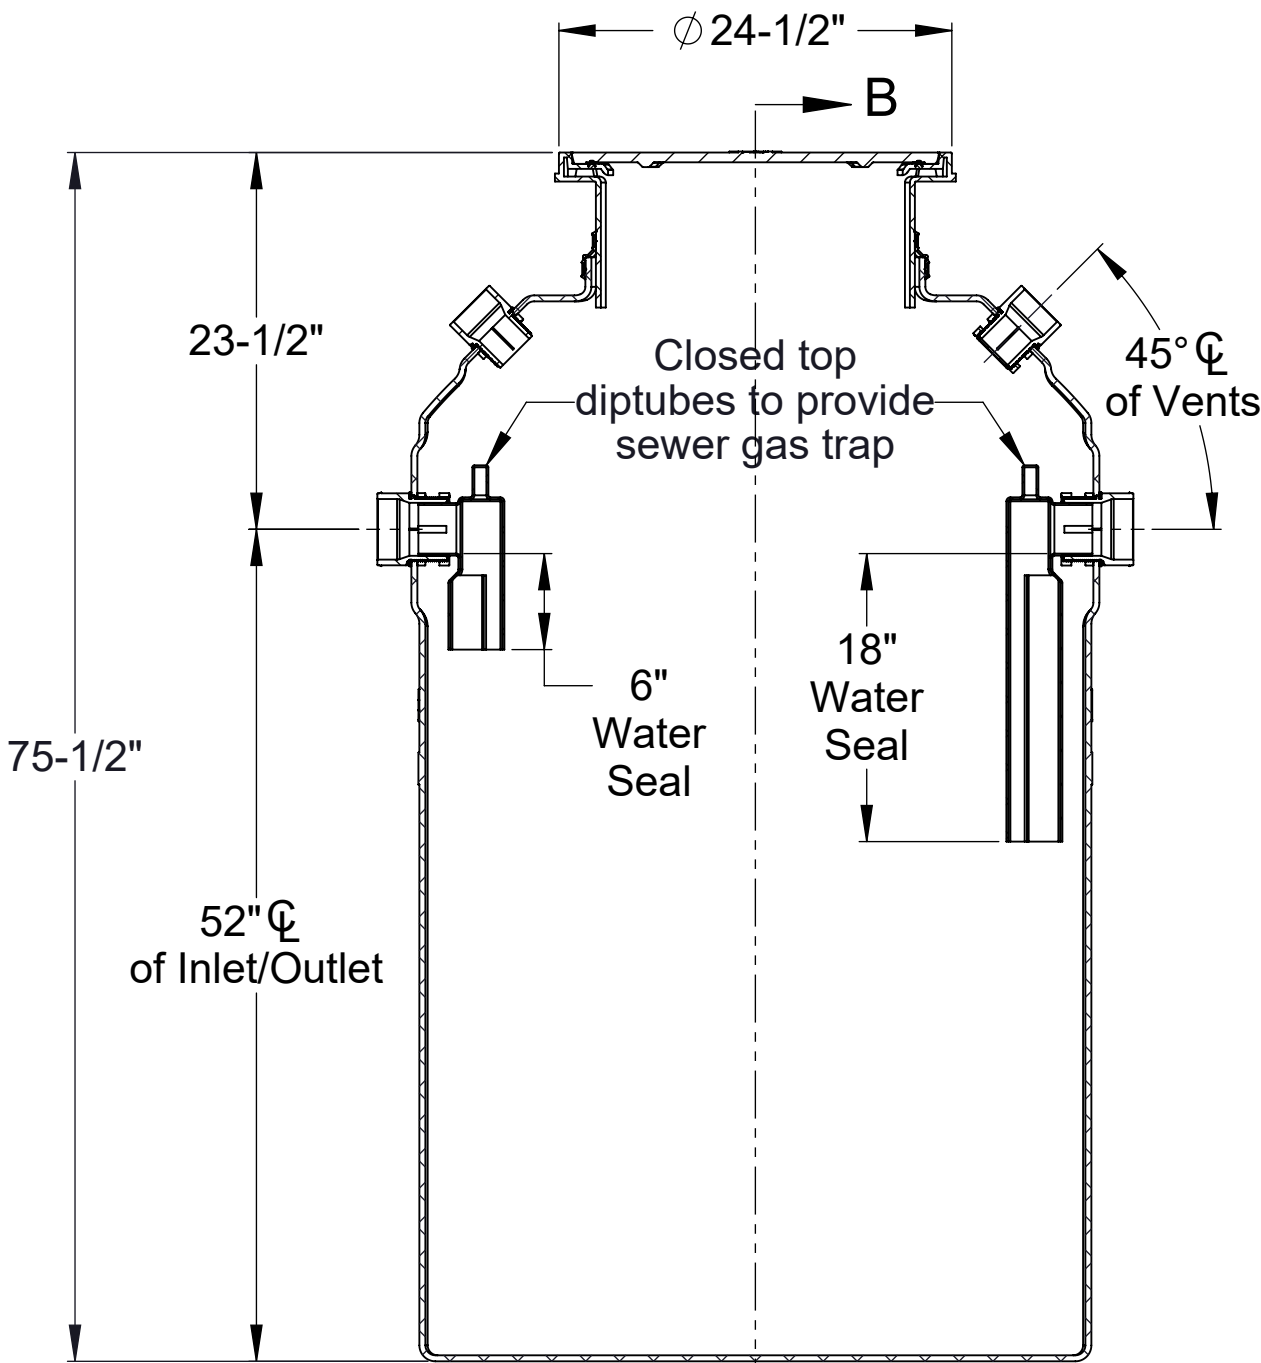

SECTION A-A

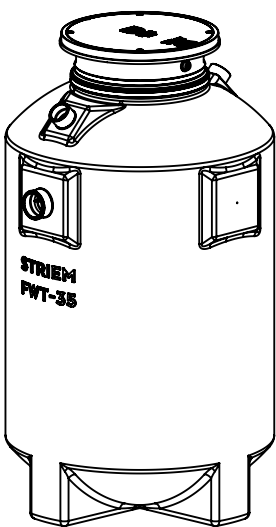

OPTIONS

Connection Options

Inlet/Outlet	Size
<input type="checkbox"/> Plain End	<input type="checkbox"/> 4"
<input type="checkbox"/> Male Thread	<input type="checkbox"/> 6"

Riser Options

- Minimum Burial Depth: 9"
- ☐ Up to 21": **SR24**
  - ☐ Up to 36": **LR24**
  - ☐ Up to 40": **SR24 (2)**
  - ☐ Up to 55": **SR24 + LR24**
  - ☐ Up to 69": **LR24 (2)**
  - ☐ Up to 87": **SR24 + LR24 (2)**

- OR -

- ☐ **CPRK:** 11" - 87" (See specification for more detail.)

Additional Options

- ☐ **C24-HP:** H2O Rated Pickable Cast Iron Cover
- ☐ **HDK-10:** High Water Table Hold Down Kit

SPECIFICATION SHEET

MODEL NUMBER: FWT-35-SS

DESCRIPTION:  
35 CUBIC FEET POLYETHYLENE  
FLAMMABLE WASTE TRAP WITH  
SLICK STICK™ OIL LEVEL MONITORING SYSTEM,  
UNRATED

Striem  
Kansas City, KS  
Tel: 913-222-1500  
orders@striemco.com  
www.striemco.com

Made in the U.S.A

