

SPECIFICATIONS

- 4" Plain End inlet/outlet, 3" Plain End vents, C24-H cover standard.
- 2. Liquid capacity: 262 Gallons (35 cu. ft.).
- 3. Solids capacity: 145 Gallons (19.4 cu. ft.).
- Flammable waste capacity: 105 Gallons (14 cu. ft.).
 Unit weight w/ standard cover: 175 lbs.; w/ cast iron cover: 235 lbs.
- Maximum operating temperature 140°F continuous.
- Minimum burial depth: 9".
- 8. Slick Stick Oil Level Monitoring System.


ENGINEER SPECIFICATION GUIDE

Striem flammable waste trap model FWT-35-SS shall be lifetime guaranteed and made in the USA. FWT-35-SS shall be constructed of polyethylene. FWT-35-SS shall be manufactured for above- or belowgrade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. FWT-35-SS liquid holding capacity shall be 262 gallons and flammable waste capacity shall be 105 gallons. Solids capacity shall be 145 gallons. Cover shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

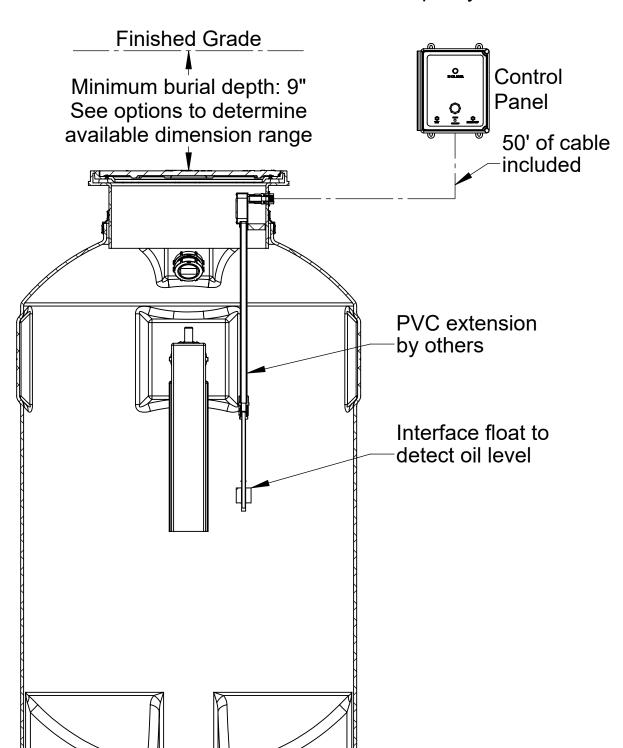

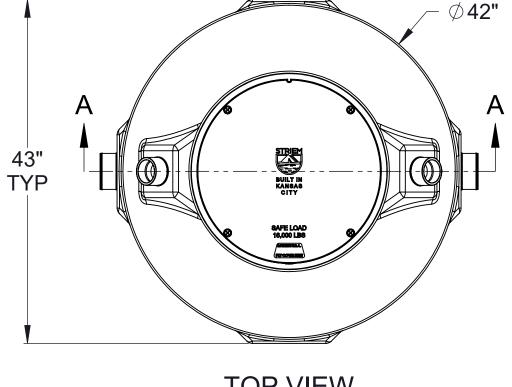

TOP VIEW

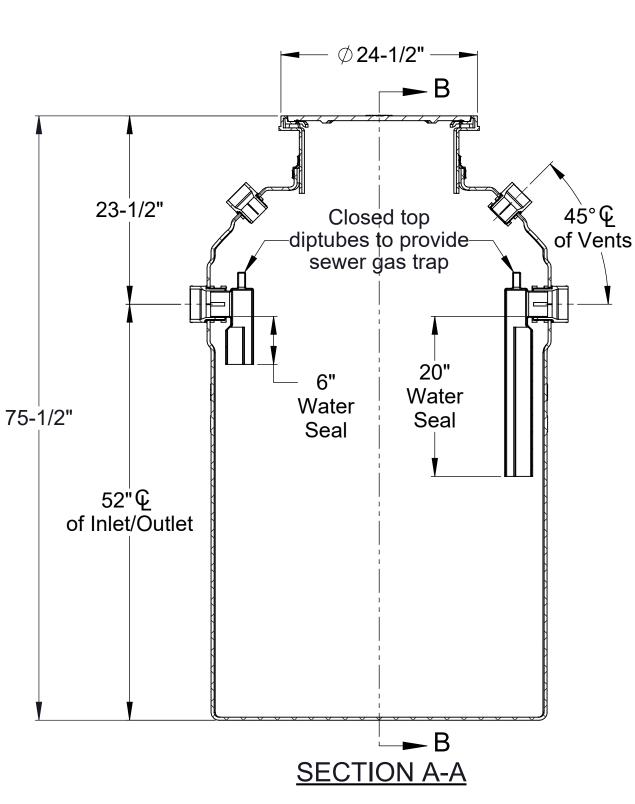

	OPTIONS
C	onnection Options (Plain End Only)
	nlet / Outlet
	4 "
	6"
R	iser Options
	Minimum Burial Depth: 9"
	Up to 21" : SR24
	Up to 36": LR24
	Up to 40" : SR24 (2)
	Up to 55" : SR24 + LR24
	Up to 69" : LR24 (2)
	Up to 87": SR24 + LR24 (2)
	- OR -
	CPRK: 11" - 87" (See specification for more detail.)

C24-HP: H20 Rated Pickable Cast Iron Cover **HDK-10**: High Water Table Hold Down Kit

Additional Options

SECTION B-B



DESCRIPTION:

MODEL NUMBER:

35 CUBIC FEET POLYETHYLENE FLAMMABLE WASTE TRAP WITH SLICK STICK™ OIL LEVEL MONITORING SYSTEM, UNRATED

FWT-35-SS

DWG BY: ENG

DATE:

6/4/2024

REV:

SPECIFICATION SHEET

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.