

SPECIFICATIONS


- 1. 4"/6" Plain End inlet/outlet, 3" Plain End vents, H20 traffic-rated cast iron covers standard.
- 2. For 6" connections, cut and remove 4" fitting section. (See IO&M for more details.)
- 3. Liquid capacity: 2000 Gallons (267 cu. ft.).
- 4. Flammable liquid capacity: 638 Gallons.
- 5. Solids capacity: 1077 Gallons.
- 6. Unit weight w/ standard covers: 2004 lbs.
- 7. Maximum operating temperature 140 °F continuous.

NOTES

- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- 4. Cover placement allows full access to tank for proper maintenance.
- 5. Lifting lug set for easy install.
- 6. Maximum burial depth: 106" from standard cover height.

ENGINEER SPECIFICATION GUIDE



Striem flammable liquid interceptor model FLI-2000 shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene with 7/8" nominal wall thickness. Interceptor shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. 4" inlet/outlet connections can be field-cut to create 6" inlet/outlet connections. Interceptor liquid holding capacity shall be 2000 gallons and flammable liquid capacity shall be 638 gallons. Solids capacity shall be 1077 gallons. Covers shall be H20 traffic-rated pickable cast iron.

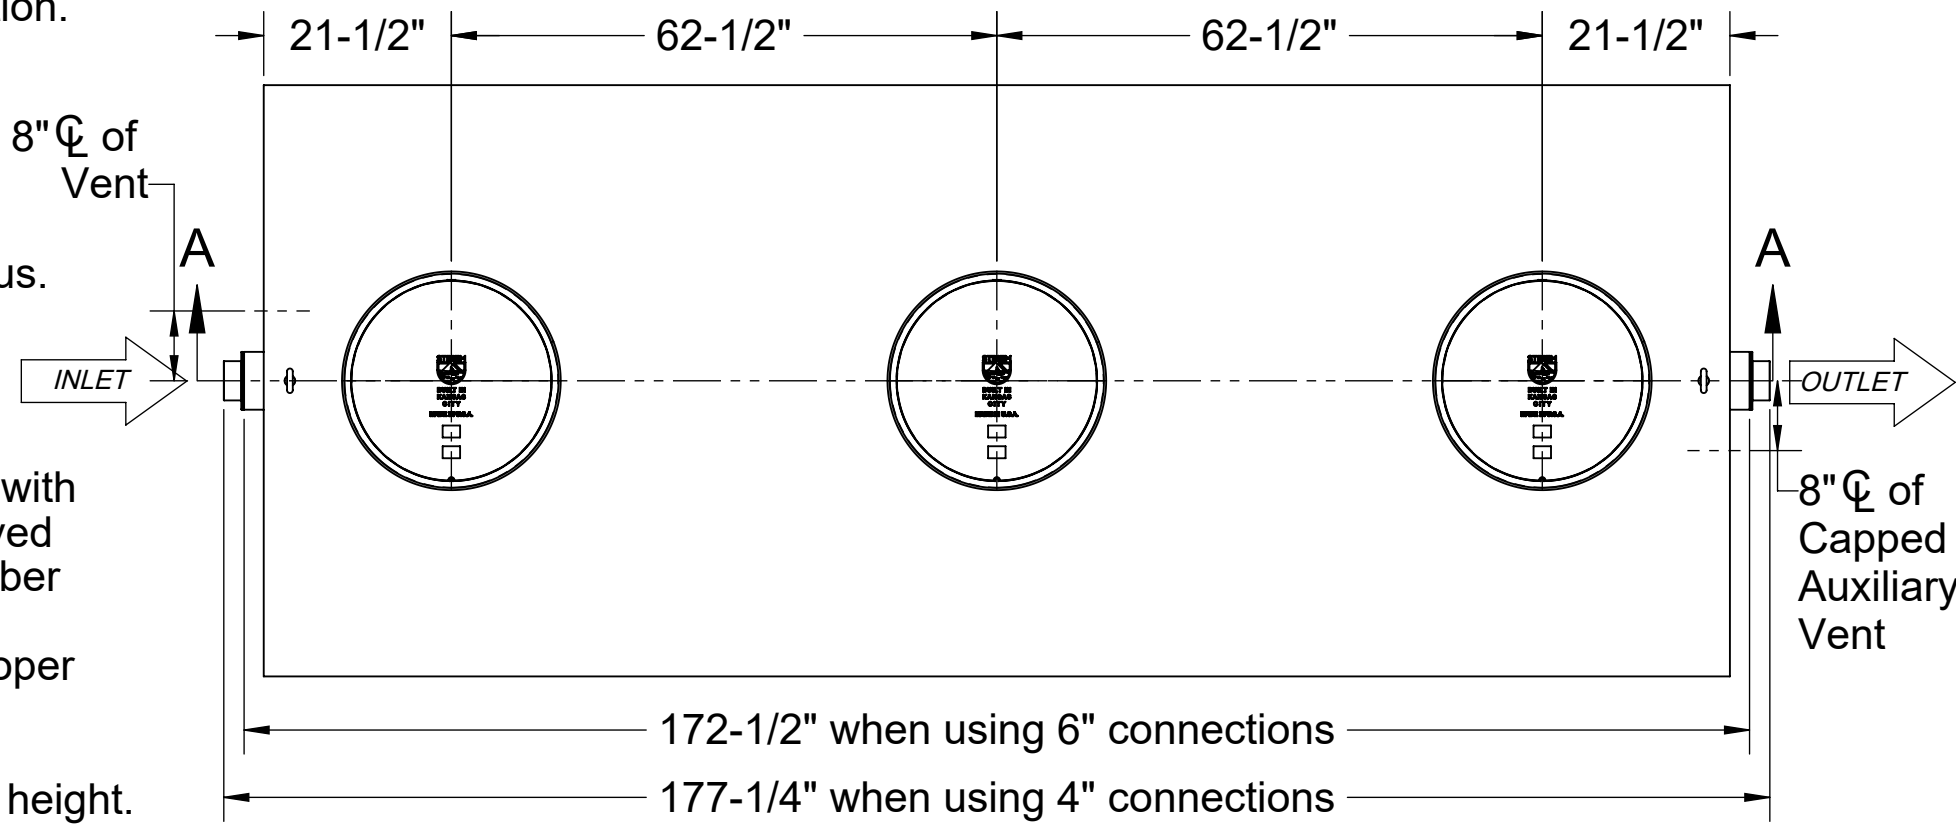

TOP VIEW

OPTIONS

Connection Options (Plain End Only)	
Inlet / Outlet	
☐	8"
Riser Options	
From Factory: Up to 5"	
☐	Up to 24": SR24 (3)
☐	Up to 39": LR24 (3)
☐	Up to 43": SR24 (6)
☐	Up to 58": SR24 (3) + LR24 (3)
☐	Up to 72": LR24 (6)
☐	Up to 90": SR24 (3) + LR24 (6)
☐	Up to 106": LR24 (9)
- OR -	
☐	CPRK (3): 11" - 106"
(See specification for more detail.)	
Additional Options	
☐	C24-M (3): 2,000 lbs. Rated Bolted Composite Covers
☐	HDK-7 : High Water Table Hold Down Kit
☐	SS : Slick Stick™ Oil Level Monitoring System*
*Monitoring system will raise covers by 3".	

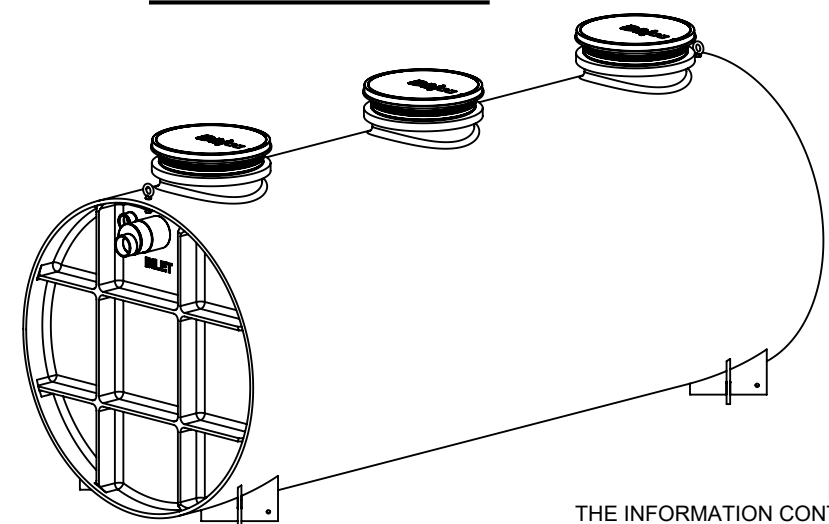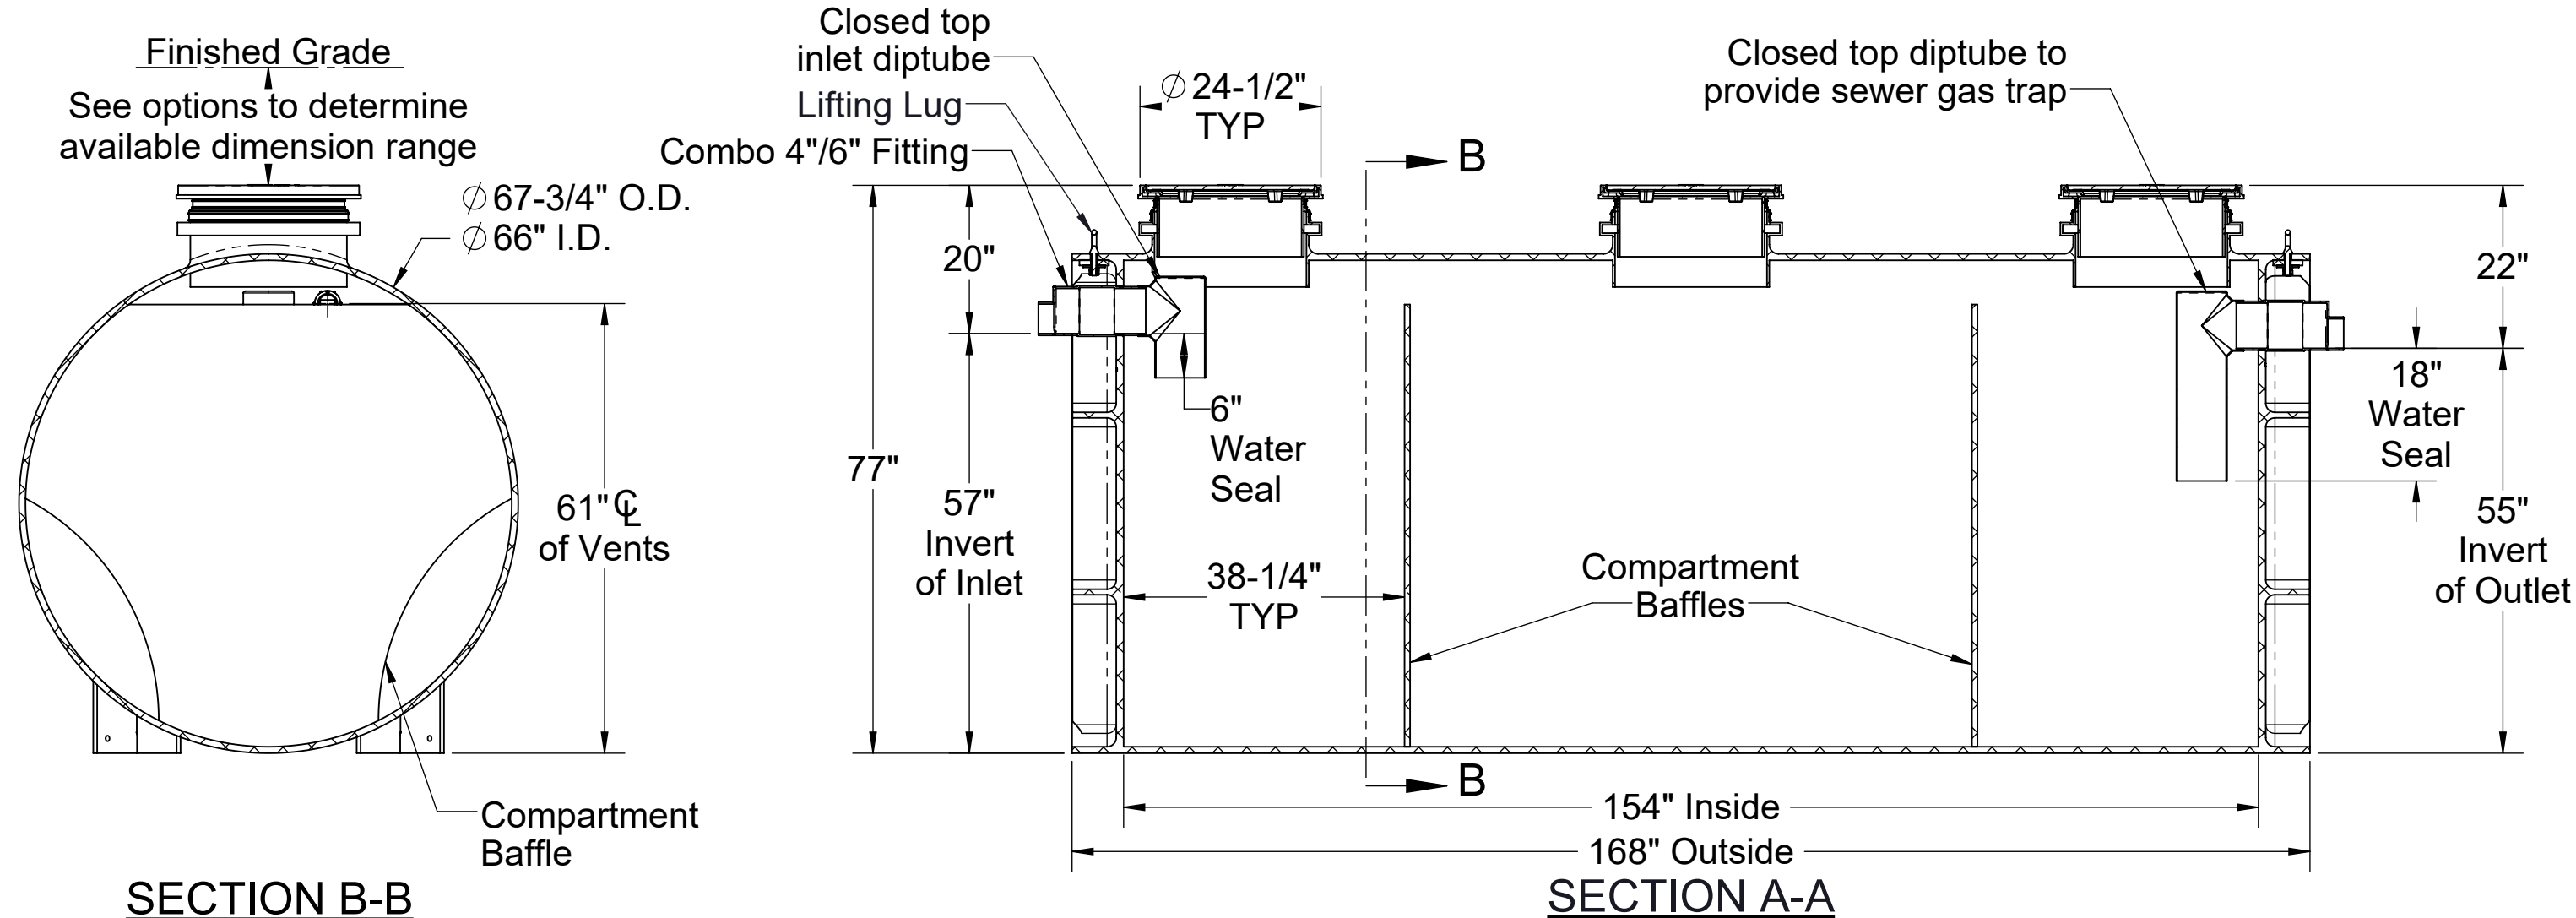

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER: FLI-2000			SPECIFICATION SHEET	
DESCRIPTION: POLYETHYLENE FLAMMABLE LIQUID INTERCEPTOR 2000 GALLON CAPACITY UNRATED			Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com Made in the U.S.A	
DWG BY: ENG	DATE: 7/23/2026	REV: 3		