

**SPECIFICATIONS**

1. 4" Plain End inlet/outlet standard.
2. Unit weight: 25 lbs.
3. Maximum operating temperature 140°F continuous.

**NOTES**

1. For above- or below-grade installation of the CC-1 Command Center pH probe.
2. For gravity drainage applications only.
3. Do not use for pressure applications.
4. Handle may be extended using 1-1/2" PVC pipe by others.
5. pH probe with 10' of wire & control panel with 50' of wire included with CC-1.

**OPTIONS**

**Connection Options (Plain End Only)**

**Inlet / Outlet**

- 4"
- 6"



**Riser Options**

**From Factory: Up to 5"**

- Up to 24": **SR24**
- Up to 39": **LR24**
- Up to 43": **SR24 (2)**
- Up to 58": **SR24 + LR24**
- Up to 72": **LR24 (2)**
- Up to 90": **SR24 + LR24 (2)**
- Up to 106": **LR24 (3)**

**- OR -**

- CPRK: 11" - 106"** (See specification for more detail.)

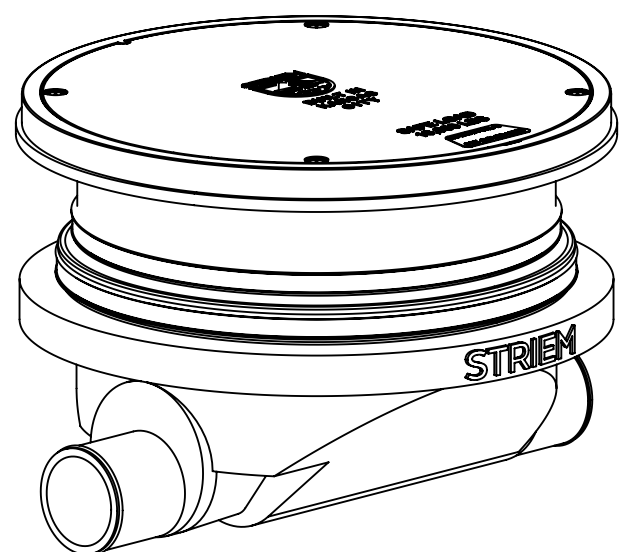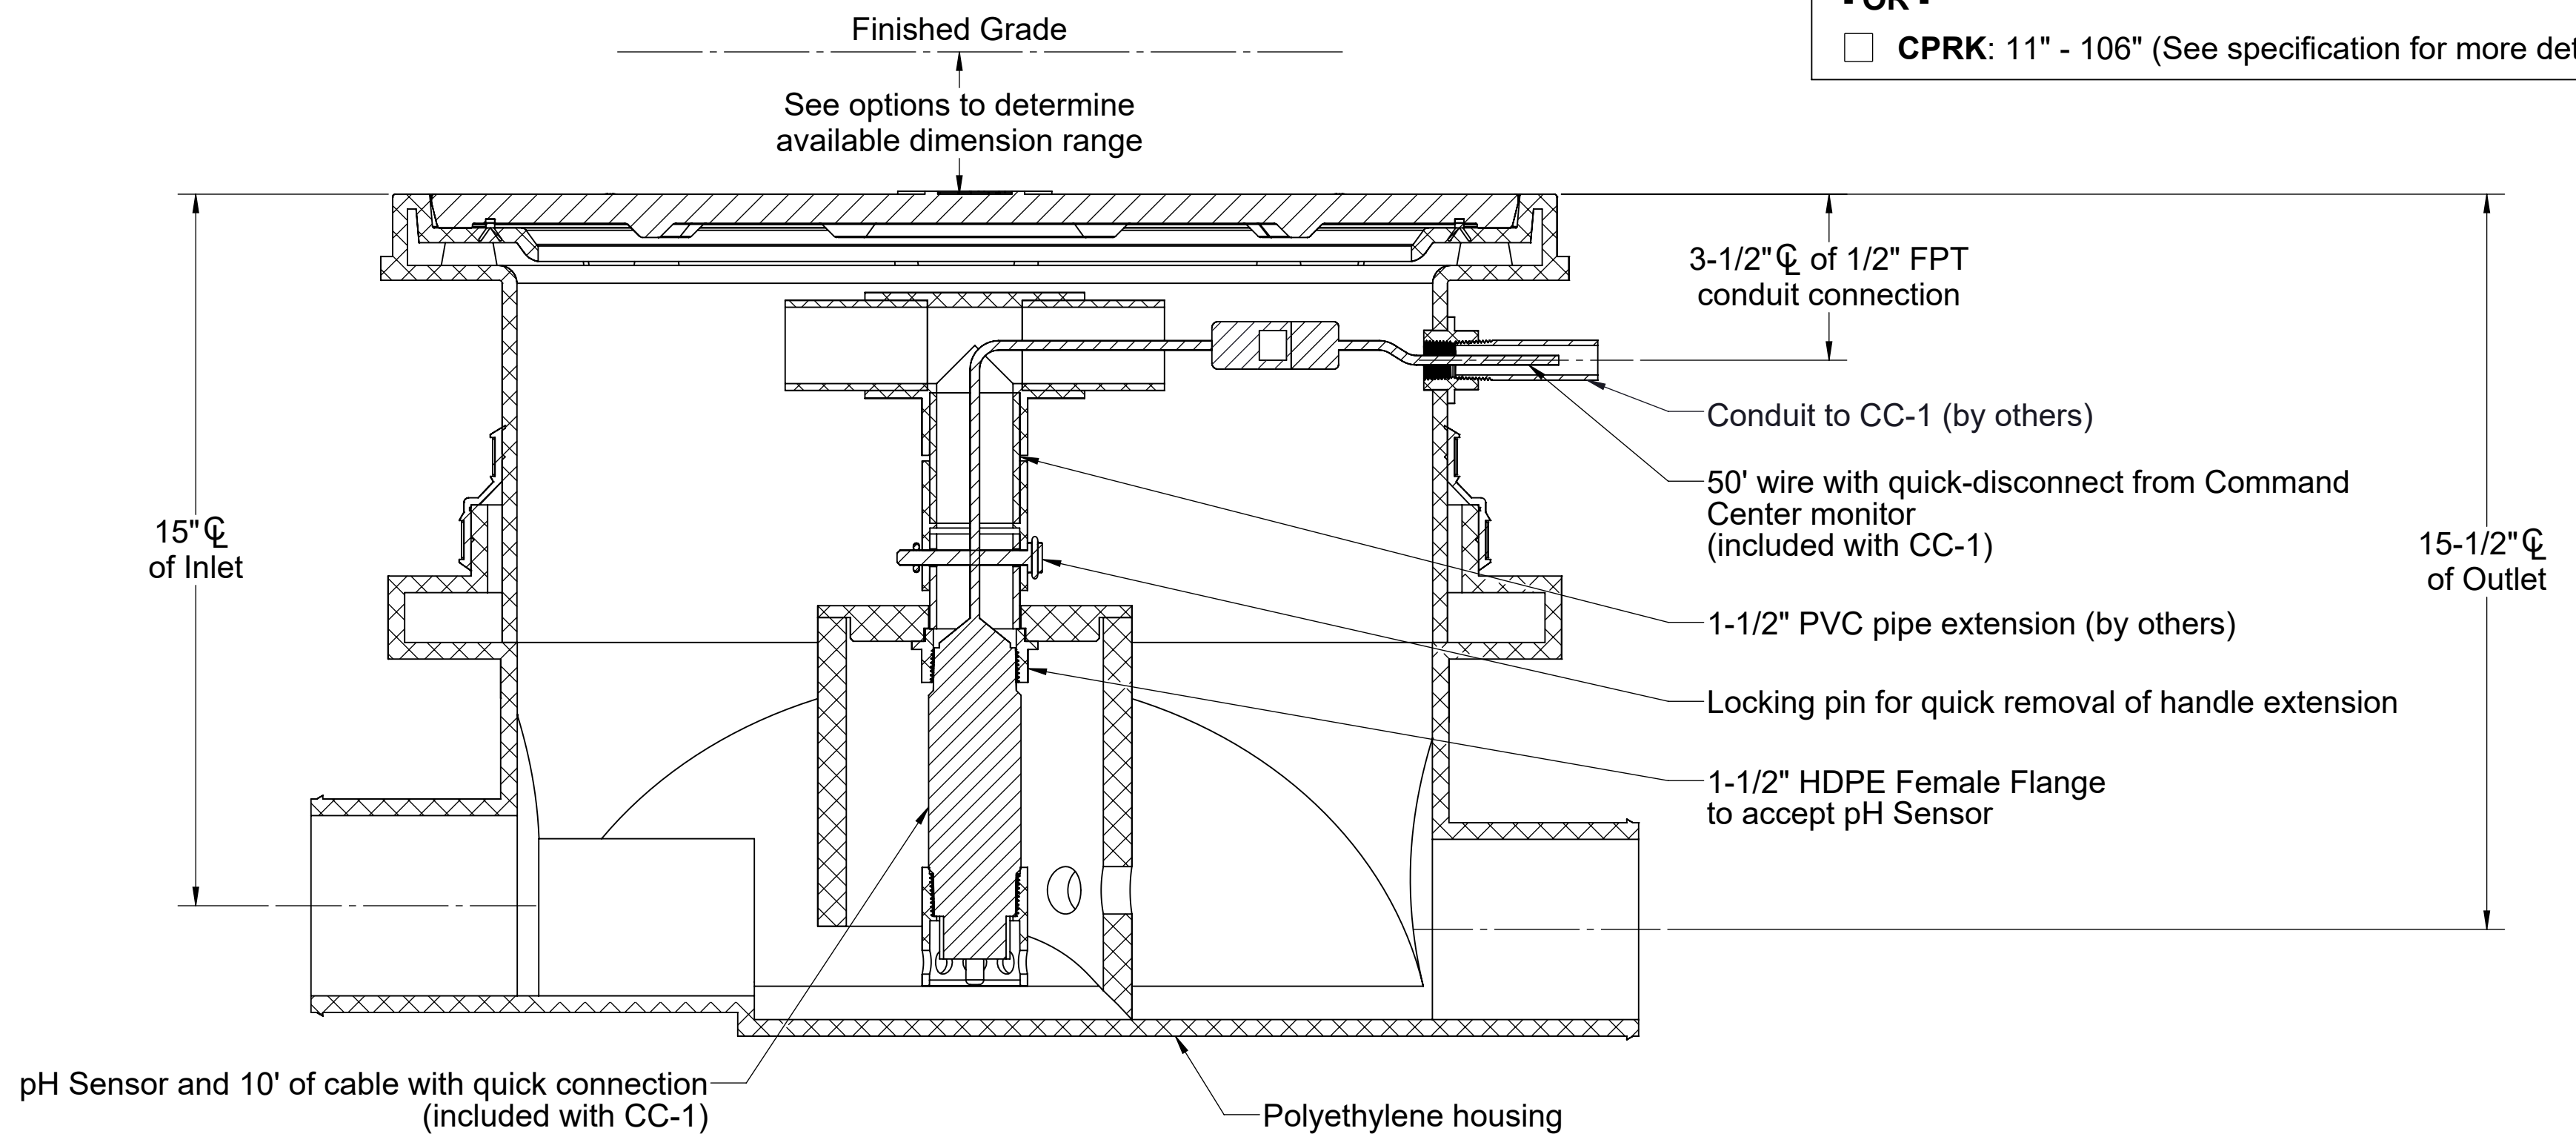

**MODEL NUMBER:** SPK

**DESCRIPTION:**  
 SENSOR PLACEMENT KIT FOR  
 COMMAND CENTER pH MONITORING SYSTEM

**DWG BY:** ENG    **DATE:** 4/30/2024    **REV:** 0

**SPECIFICATION SHEET**

Striem  
 Kansas City, KS  
 Tel: 913-222-1500  
 orders@striemco.com  
 www.striemco.com

Made in the U.S.A

