


WSSC OIL SEPARATOR SELECTION GUIDE







SMALL INTERCEPTOR

OS-500-WSSC

LIQUID CAPACITY: 562 GAL. OIL CAPACITY: 470 GAL. UNIT WEIGHT: 1,025 LBS.

COVERS: H-20 rated pickable cast iron

LARGE INTERCEPTOR

OS-1500-WSSC

LIQUID CAPACITY: 1,500 GAL. **OIL CAPACITY:** 1,175 GAL. **UNIT WEIGHT:** 1,676 LBS.

COVERS: H-20 rated pickable cast iron

OPTIONS



- SR/LR field-adjustable extensions
- Corrugated Pipe Riser Kit (CPRK)
- High water hold down kits
- Slick Stick™oil level monitoring system

SPEC FORMATS












*AVAILABLE ONLINE FOR ALL PRODUCTS

















WSSC OIL SEPARATOR SELECTION GUIDE



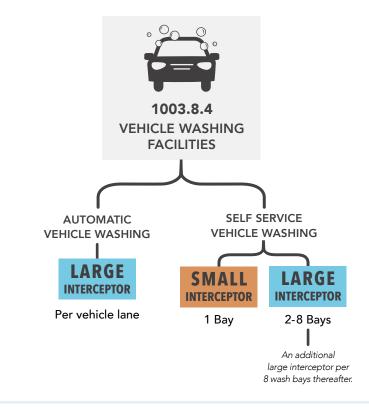





For other applications that are not covered in WSSC 1003.8, please contact Striem or Virginia Maryland Associates.







