SPECIFICATIONS

- 1. 4" Plain End inlet/outlet, 2" Plain End vents standard.
- 2. Liquid holding capacity: 110 Gallons.
- 3. Unit weight: 120 lbs.
- 4. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Diptube is removable to inspect/clean piping.

ENGINEER SPECIFICATION GUIDE


Striem neutralization tank model LB-125 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene. Tank shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Tank liquid holding capacity shall be 110 gallons. Cover shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

THIRD PARTY STRUCTURAL ANALYSIS


The LB-125 has been structurally analyzed in accordance with the requirements of IBC 2012 and ASCE/SEI 7 for direct burial. The maximum burial depth and backfill material are specified in our installation instructions. The structural design has been reviewed and sealed by a professional engineer registered in the state of California. A sealed structural analysis report is available upon request.

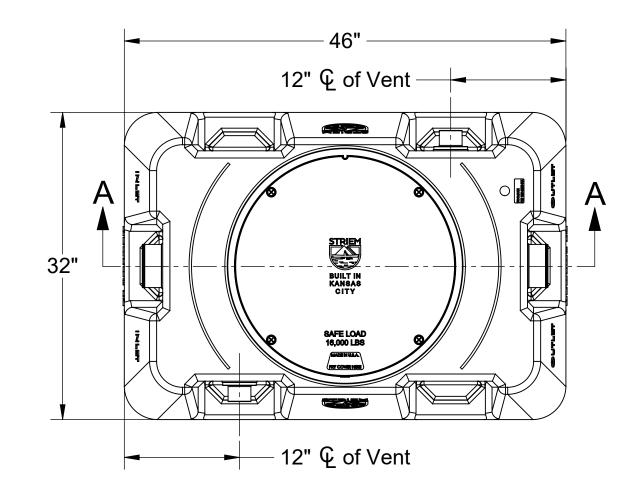


TOP VIEW

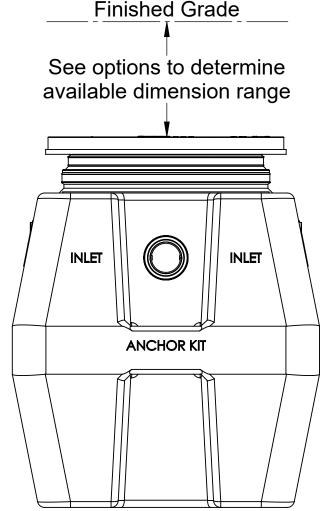



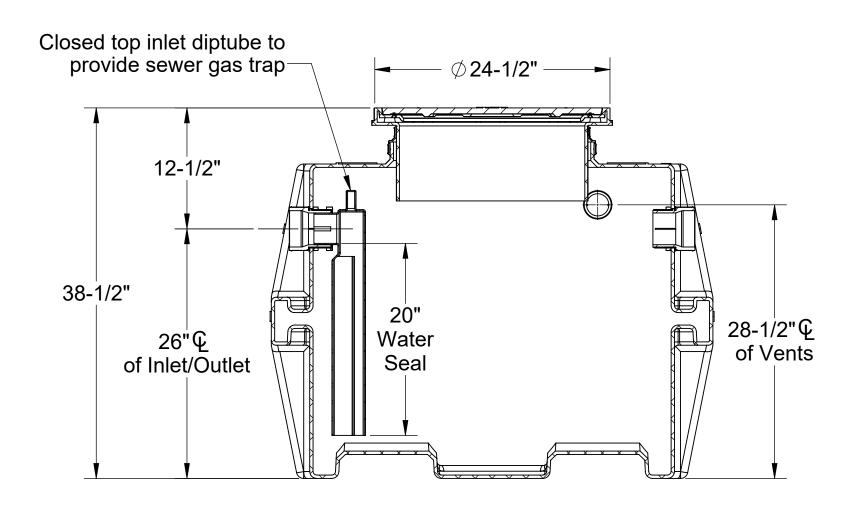

SECTION A-A



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
Y REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

LAB BASIN™ POLYETHYLENE NEUTRALIZATION TANK

DWG BY: ENG DATE:

MODEL NUMBER:

DESCRIPTION:

5/24/2024

REV:

LB-125

Made in the U.S.A

SPECIFICATION SHEET

OPTIONS

☐ **CPRK**: 11" - 72" (See specification for more detail.)

☐ **CC-1:** Command Center pH Monitoring Package

Limestone: 90%+ Calcium Carbonate (1,550 lbs.)

☐ HDK-2: High Water Table Hold Down Kit

SPK: Sensor Placement Kit*

Connection Options (Plain End Only)

Inlet / Outlet

Riser Options

From Factory: Up to 5"

Up to 43": **SR24** (2)

☐ Up to 72": **LR24** (2)

Additional Options

*Required with CC-1

Up to 58": SR24 + LR24

Up to 24": SR24

Up to 39": LR24

4"

□ 6"

- OR -

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

