SPECIFICATIONS


- 4" Plain End inlet/outlet standard. 1.
- Liquid capacity: 110 Gallons. 2.
- Solids capacity: 70 Gallons. 3.
- 4. Basket capacity: 7 Gallons.
- Unit weight: 227 lbs. 5.
- 6. Maximum operating temperature 140°F continuous.


NOTES

- For gravity drainage applications only. 1.
- 2. Do not use for pressure applications.
- Cover placement allows full access to tank for proper maintenance.
 Narrow footprint allows clearance through doorways and down stairs.
- Diptube is removable to inspect or clean piping.
 Maximum burial depth: 69" from standard cover height.

ENGINEER SPECIFICATION GUIDE


Striem solids interceptor model CB-125-G shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for below-grade installation. Fieldadjustable riser system is available as an option to bring manhole cover to grade. Interceptor liquid holding capacity shall be 110 gallons. Interceptor solids capacity shall be 70 gallons. BCB-7 basket solids capacity shall be 7 gallons. Cover shall be H20 rated cast iron grate.

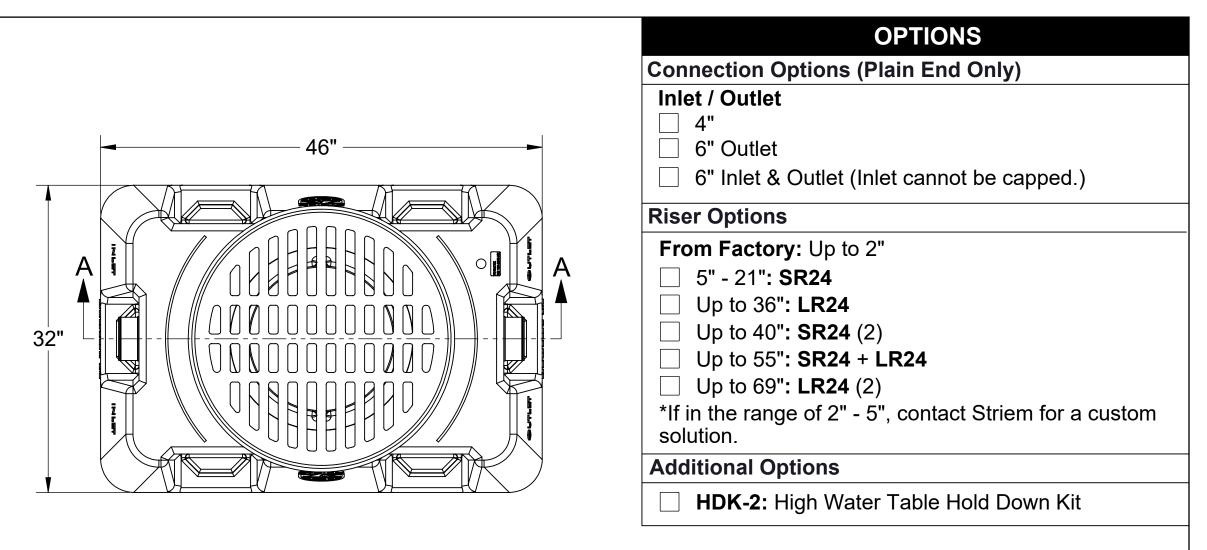

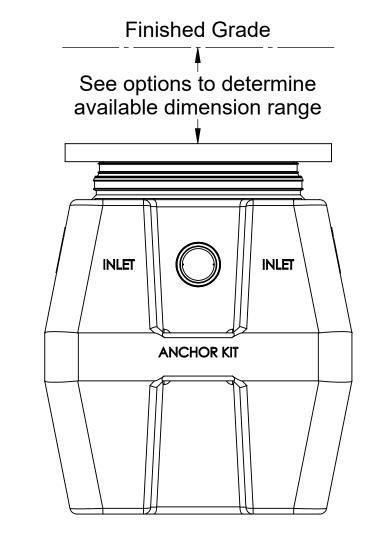


END VIEW

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISS

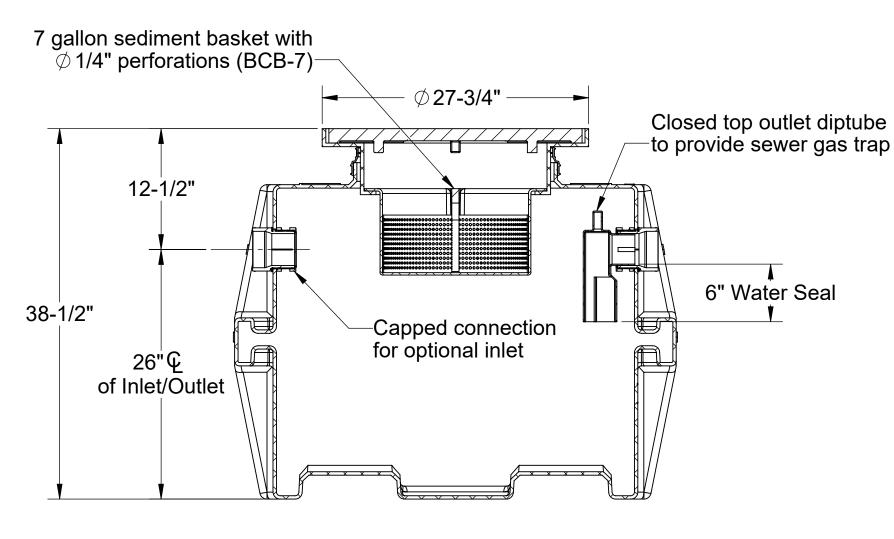

TA	MODEL NUMBER: CB-125-G			SPECIFICATION SHEET			
	DESCRIPTION:				Otviewe	STRIFM	
	POLYETHYLENE CATCH BASIN WITH H20 RATED CAST IRON GRATE AND BCB-7 SEDIMENT BASKET				Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com		
PROPRIETARY AND CONFIDENTIAL					Made in the U.S.A		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. PRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.	DWG BY: ENG	DATE:	4/24/2025	REV :	1		



TOP VIEW

SECTION A-A