SPECIFICATIONS


- 1. 6" Plain End inlet/outlet shown, 3" Plain End vents standard.
- 2. Liquid capacity: 500 gallons (67 cu. ft.).
- 3. Unit weight: 800 lbs.
- 4. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- Cover placement allows full access to tank for proper maintenance. 4.
- 5. Lifting lug set for easy install.
- 6. Maximum burial depth: 106" from standard cover height.

ENGINEER SPECIFICATION GUIDE

Striem neutralization tank model LB-500 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene with 7/8" nominal wall thickness. Tank shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Tank liquid holding capacity shall be 500 gallons. Cover shall provide water/gas-tight seal and have a maximum 16,000 lbs. load capacity.

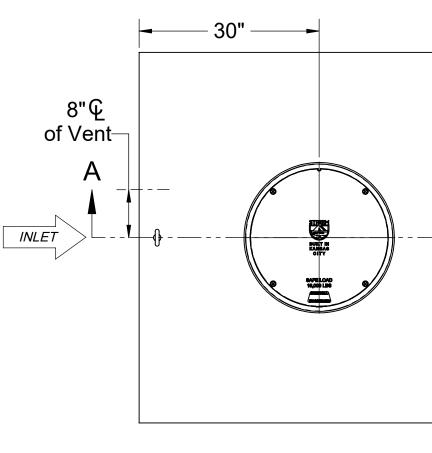

TOP VIEW

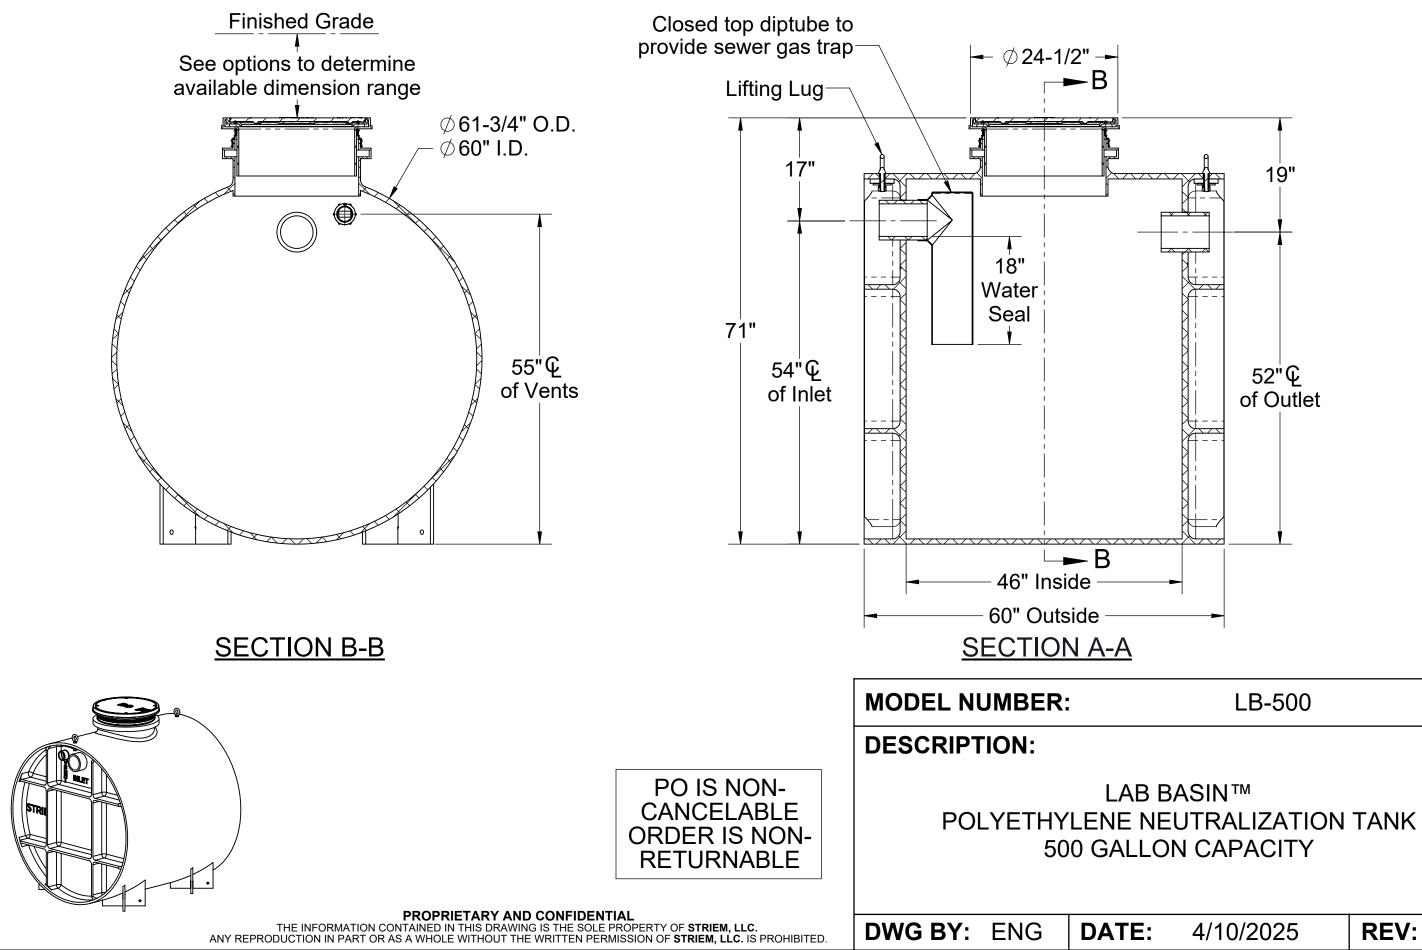

	OPTIONS
	Connection Options (Plain End Only)
	Inlet / Outlet SELECTION 4" REQUIRED
	Riser Options
A OUTLET 8"& of Capped Auxiliary Vent	From Factory: Up to 5" Up to 24": SR24 Up to 39": LR24 Up to 43": SR24 (2) Up to 58": SR24 + LR24 Up to 72": LR24 (2) Up to 90": SR24 + LR24 (2) Up to 106": LR24 (3) - OR -
	CPRK: 11" - 106" (See specification for more detail.)
	Additional Options
	 CC-1 & SPK: Command Center pH Monitoring Package with Sensor Placement Kit HDK-8: High Water Table Hold Down Kit
	Limestone: 90%+ Calcium Carbonate (6,500 lbs.)

SPECIFICATION SHEET

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A



4/10/2025	REV:

1