

SPECIFICATIONS

- 1. 4" Plain End inlet/outlet standard.
- 2. Unit weight: 51 lbs.
- 3. Maximum operating temperature 140°F continuous.

NOTES

- 1. For above- or below-grade installation of the CC-1 Command Center pH probe.
- 2. For gravity drainage applications only.
- 3. Do not use for pressure applications.
- 4. Handle may be extended using 1-1/2" PVC pipe by others.
- 5. pH probe with 10' of wire & control panel with 50' of wire included with CC-1.
- 6. Maximum burial depth: 103" from standard cover height.

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet

- ☐ 4"
- ☐ 6"



Riser Options

From Factory: Up to 2"

- ☐ Up to 21": SR24
- ☐ Up to 36": LR24
- ☐ Up to 40": SR24 (2)
- ☐ Up to 55": SR24 + LR24
- ☐ Up to 69": LR24 (2)
- ☐ Up to 87": SR24 + LR24 (2)
- ☐ Up to 103": LR24 (3)

- OR -

- ☐ CPRK: 11" - 103" (See specification for more detail.)

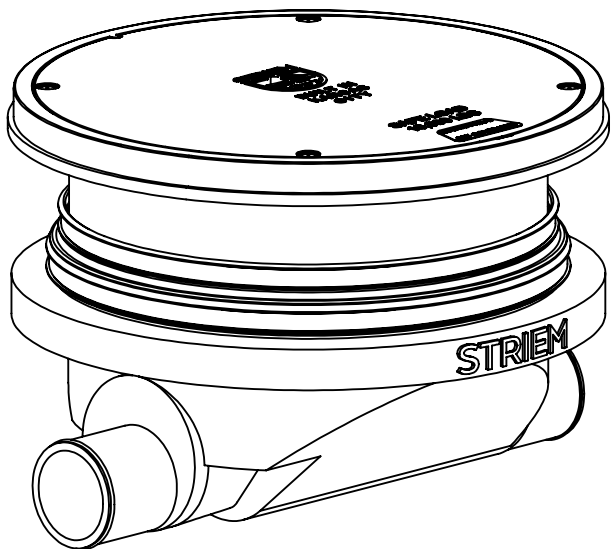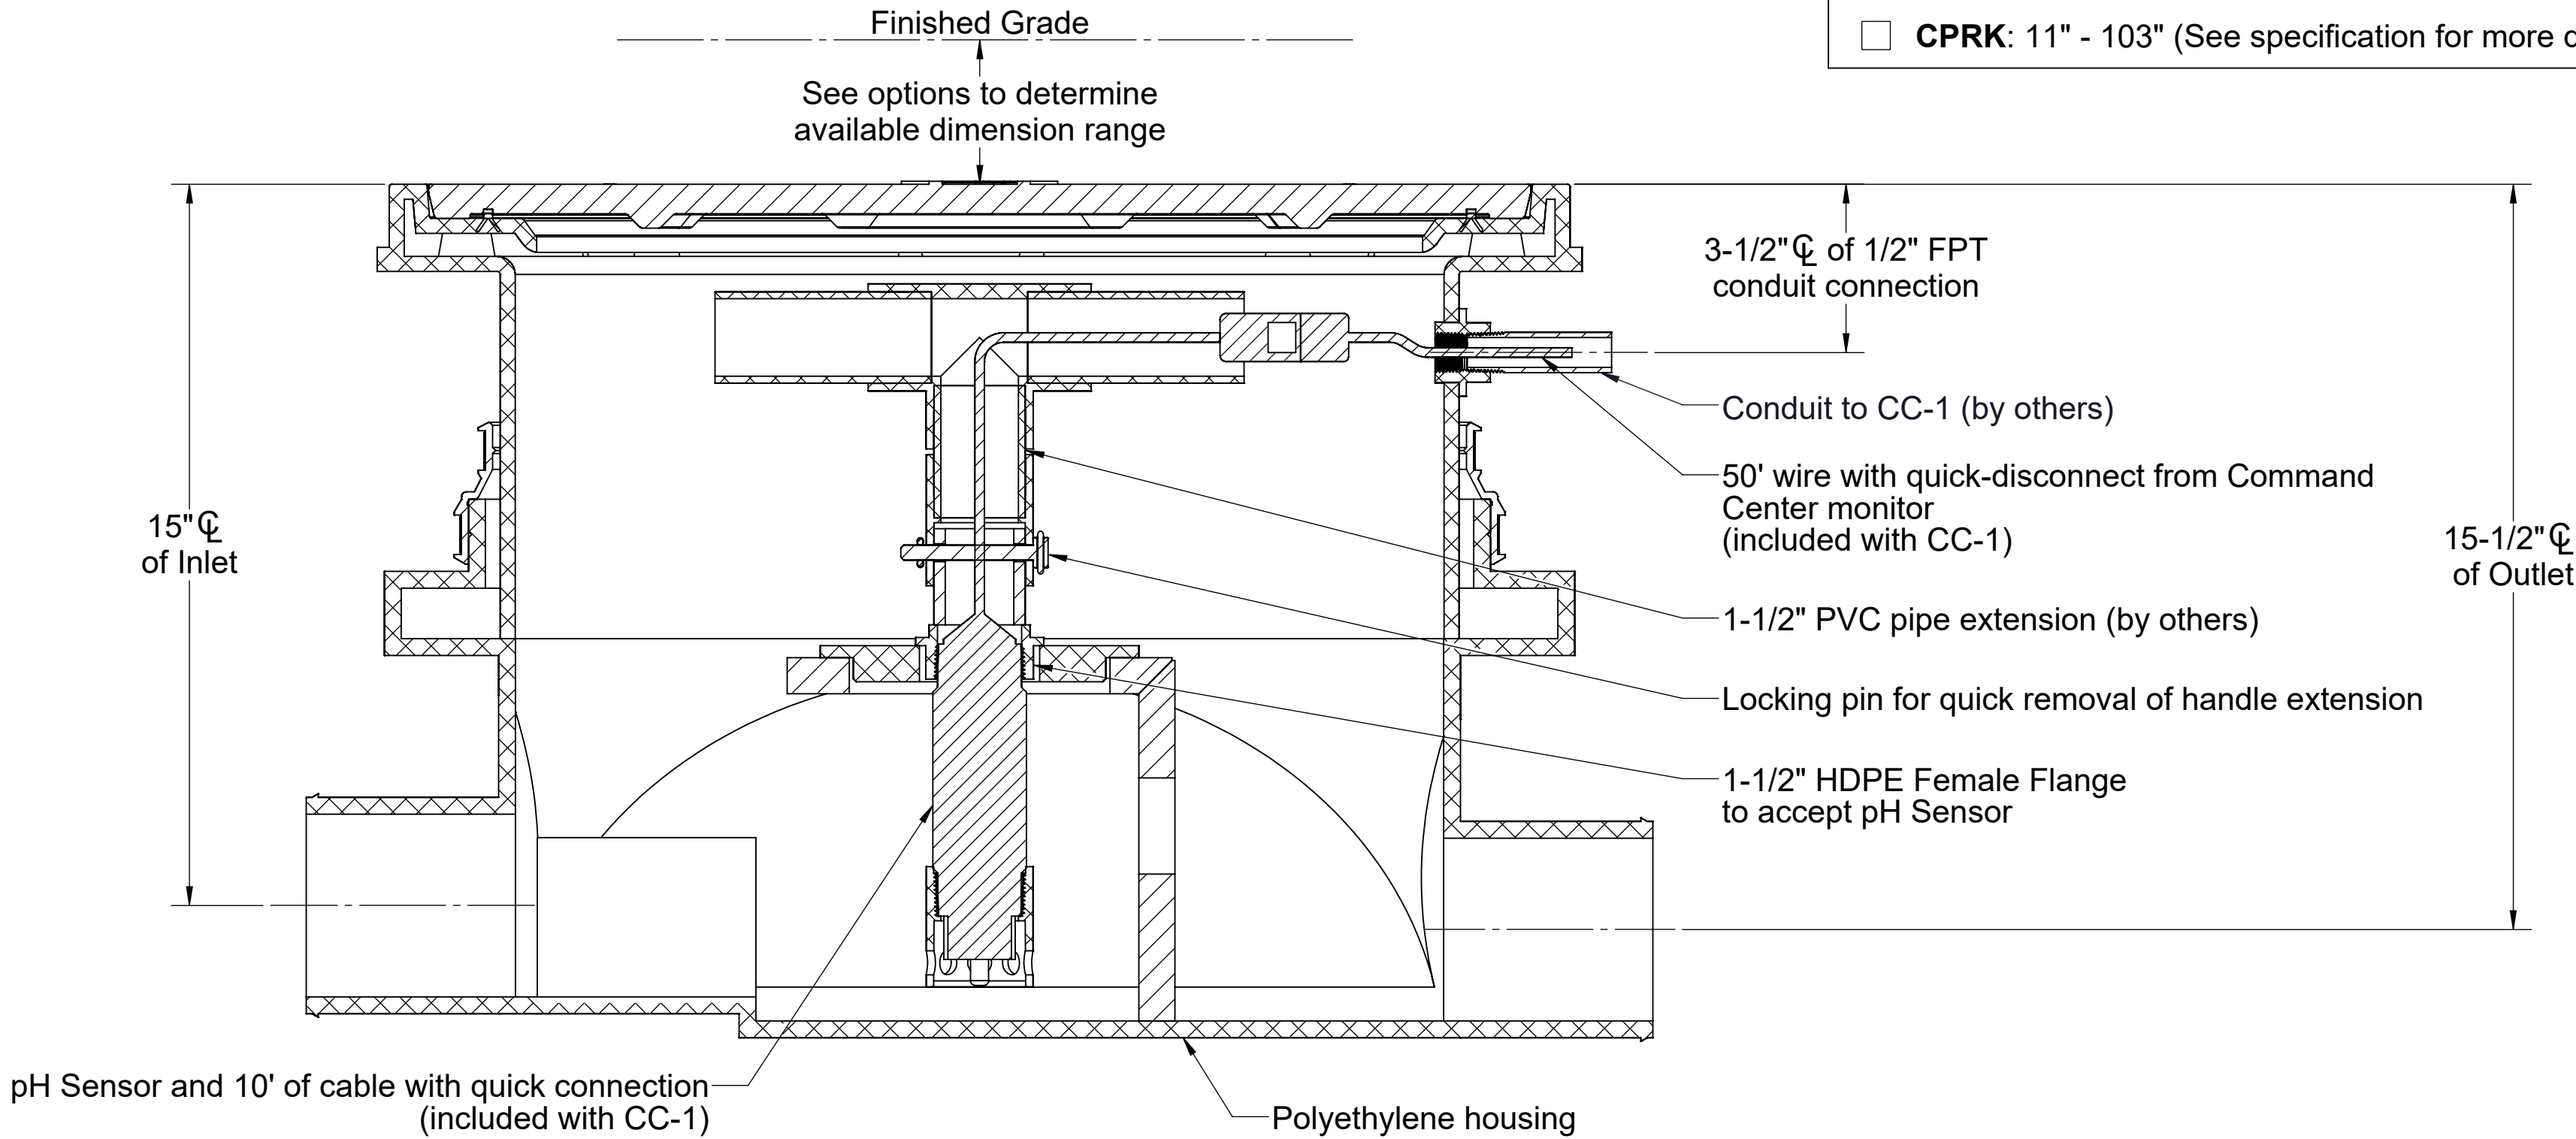

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

MODEL NUMBER:

SPK

DESCRIPTION:

SENSOR PLACEMENT KIT FOR
COMMAND CENTER™ pH MONITORING SYSTEM

DWG BY: ENG

DATE: 7/11/2025

REV: 1

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

