

SPECIFICATIONS

- 1. 4" Plain End inlet/outlet, 3" Plain End vents, C24-HP covers standard.
- 2. Certified max flow rate: 100 GPM.
- 3. Liquid capacity: 500 Gallons (66.8 cu. ft.).
- 4. Oil capacity: 125 Gallons.
- 5. Solids capacity: 195 Gallons.
- 6. Unit weight w/ standard covers: 456 lbs.; w/ C24-M covers: 336 lbs.
- 7. Maximum operating temperature 140°F continuous.

NOTES


- 1. Engineered inlet diffuser efficiently separates oil from water.
- 2. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- 3. For gravity drainage applications only.
- 4. Do not use for pressure applications.
- 5. Cover placement allows full access to tank for proper maintenance.
- 6. Maximum burial depth: 106" from standard cover height.

ENGINEER SPECIFICATION GUIDE


Striem high efficiency oil/water separator model OS-500 shall be lifetime guaranteed and made in the USA. Separator shall be certified to IAPMO IGC 325 and carry a UPC listing. Separator shall be constructed of polyethylene. Separator shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 100 GPM. Separator liquid holding capacity shall be 500 gallons and oil capacity shall be 125 gallons. Solids capacity shall be 195 gallons. Covers shall be H20 rated pickable cast iron.

IAPMO IGC 325 CERTIFICATION



The OS-500 has been third party certified by IAPMO to the IGC 325 standard. The OS-500 achieved an average 99% efficiency rating with 3.7 mg/L at 100 GPM up to the maximum oil capacity of 125 gallons. The structural design has been approved and stamped by a structural engineer for direct burial in accordance with Striem's installation instructions.

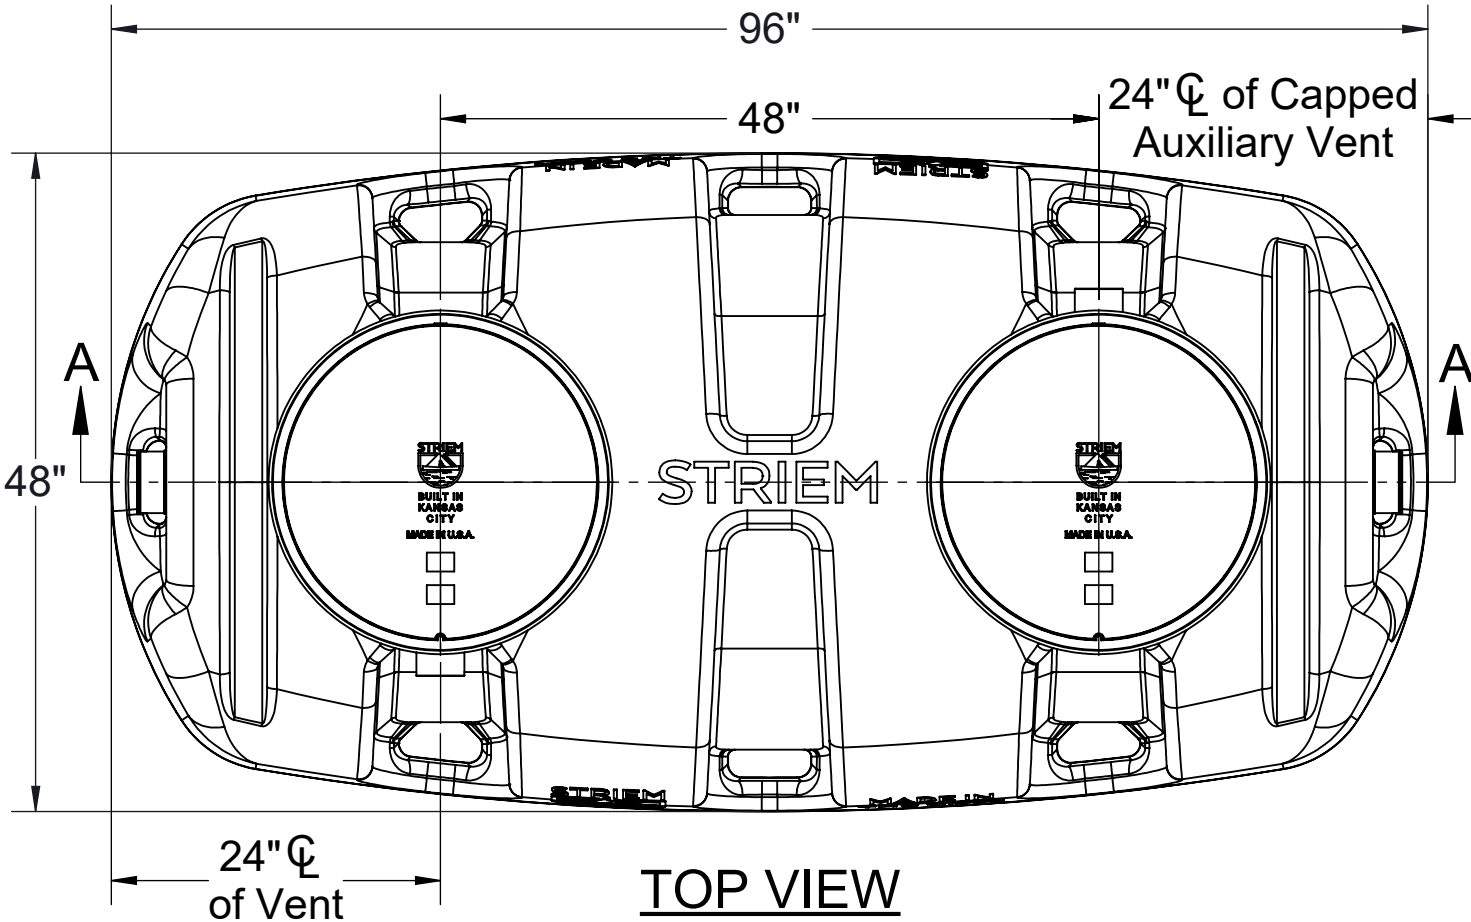

OPTIONS	
Connection Options (Plain End Only)	
Inlet / Outlet	<input type="checkbox"/> 4"
	<input type="checkbox"/> 6"
Riser Options	
From Factory: Up to 5"	
<input type="checkbox"/>	Up to 24": SR24 (2)
<input type="checkbox"/>	Up to 39": LR24 (2)
<input type="checkbox"/>	Up to 43": SR24 (4)
<input type="checkbox"/>	Up to 58": SR24 (2) + LR24 (2)
<input type="checkbox"/>	Up to 72": LR24 (4)
<input type="checkbox"/>	Up to 90": SR24 (2) + LR24 (4)
<input type="checkbox"/>	Up to 106": LR24 (6)
-OR-	
<input type="checkbox"/>	CPRK (2): 11" - 106" (See specification for more detail.)
Additional Options	
High Water Table Hold Down Kits (Choose One)	
<input type="checkbox"/>	HDK-13 : With Steel Plates Included
<input type="checkbox"/>	HDK-14 : For Concrete Deadmen (By Others)
<input type="checkbox"/>	C24-M : 2,000 lbs. Rated Bolted Composite Cover*
<input type="checkbox"/>	SS : Slick Stick™ Oil Level Monitoring System**
*For above-grade installations.	
**Monitoring system will raise covers by 3".	

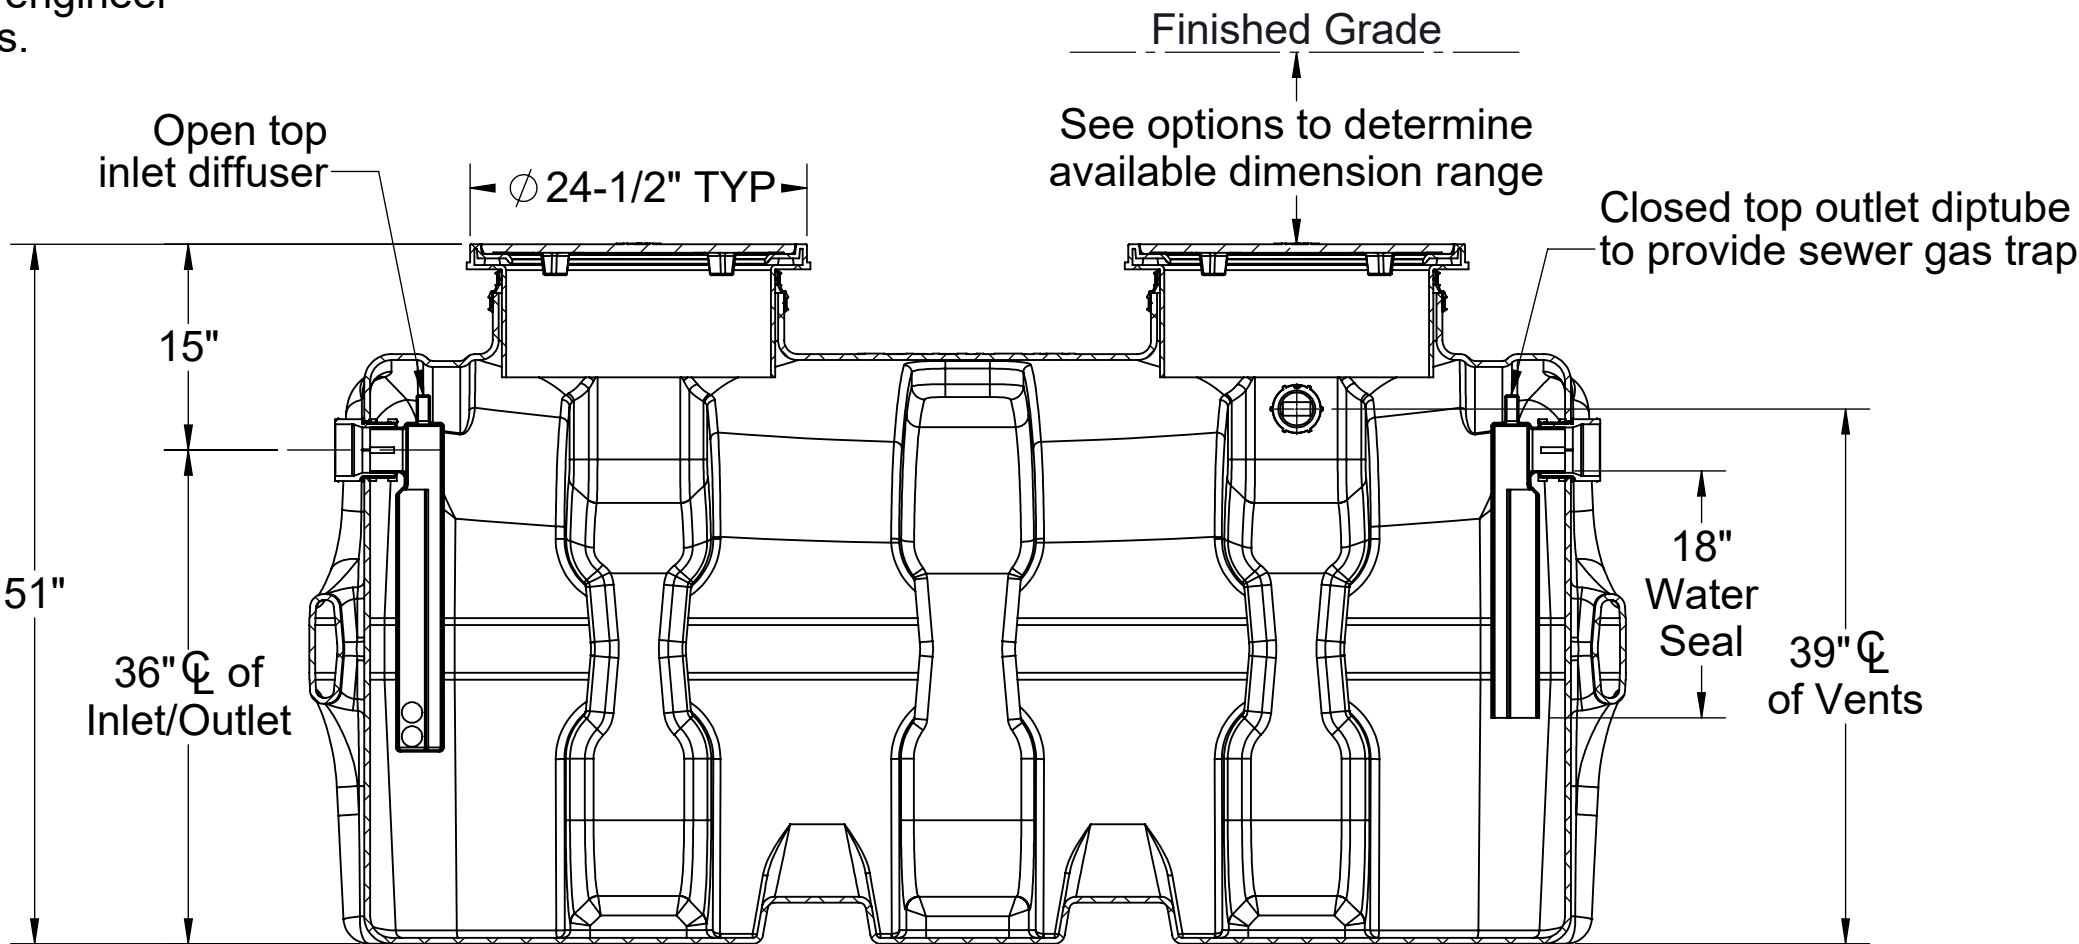

SECTION A-A

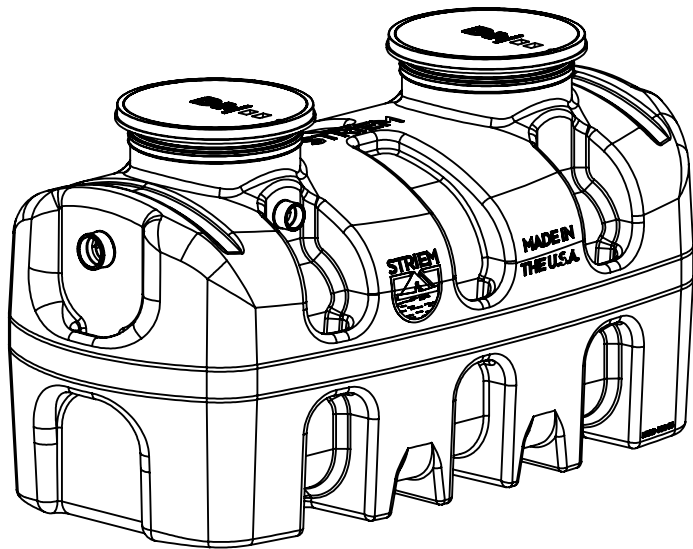

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER:		OS-500		SPECIFICATION SHEET	
DESCRIPTION:				<div>Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com</div> <div>Made in the U.S.A</div>	
100 GPM POLYETHYLENE HIGH EFFICIENCY OIL/WATER SEPARATOR					
DWG BY:	ENG	DATE:	7/24/2025	REV:	0