




OIL SEPARATORS

STRIEM'S OIL SEPARATOR FOOTPRINT

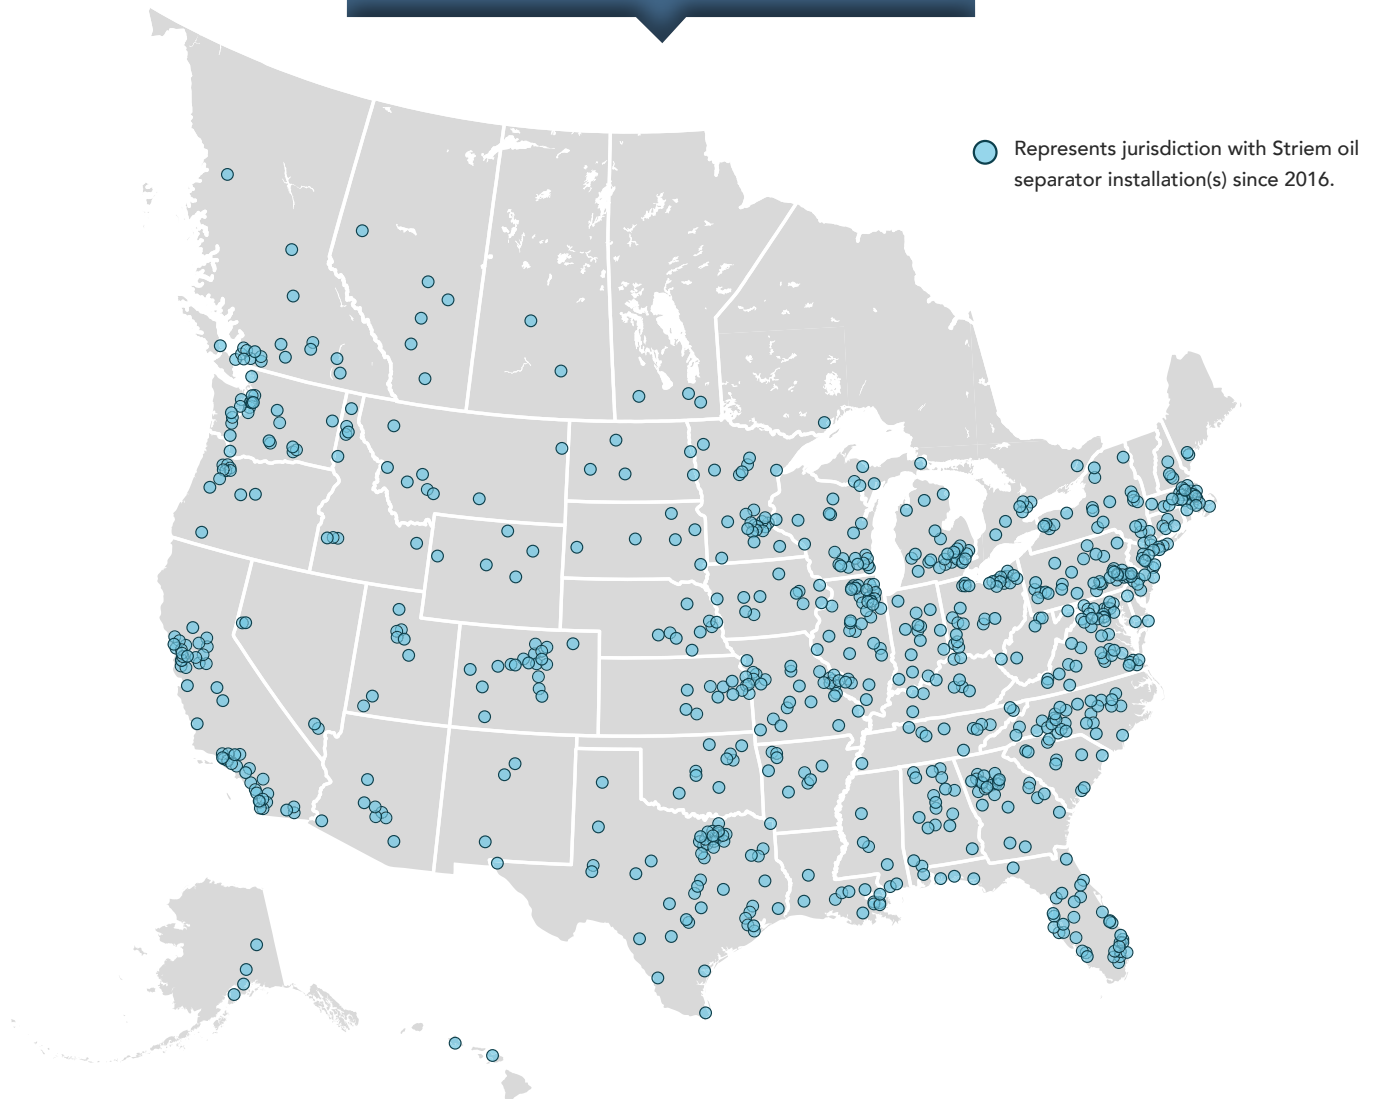

APPLICATIONS




AUTO SERVICE/
REPAIR STATIONS



FIRE HOUSE/
POLICE STATIONS



PARKING
GARAGES



HYDRAULIC
ELEVATOR PITS



CAR WASHES



LOADING
DOCKS



AIRPORTS /
HANGARS



**LIFETIME
GUARANTEED**



913-222-1500



HELP@STRIEMCO.COM



STRIEMCO.COM

**MADE
IN THE
USA**
★ BUILT in ★
KANSAS CITY



OIL SEPARATORS

HIGH EFFICIENCY OIL/WATER SEPARATOR SERIES:

OS-25

99%
EFFICIENT



CONNECTIONS: 3" SAND CAPACITY: 6 GAL.
LIQUID CAPACITY: 21 GAL. COVER: PEDESTRIAN-RATED
OIL CAPACITY: 5.25 GAL. CERTIFIED FLOW RATE: 25 GPM

OS-50


98%
EFFICIENT



CONNECTIONS: 4" SAND CAPACITY: 7 GAL.
LIQUID CAPACITY: 57 GAL. COVER: PEDESTRIAN-RATED
OIL CAPACITY: 14.25 GAL. CERTIFIED FLOW RATE: 50 GPM

OS-75

99%
EFFICIENT



CONNECTIONS: 4", 6" SAND CAPACITY: 11 GAL.
LIQUID CAPACITY: 110 GAL. COVER: PEDESTRIAN-RATED
OIL CAPACITY: 27.5 GAL. CERTIFIED FLOW RATE: 75 GPM

OS-100

99%
EFFICIENT



CONNECTIONS: 4", 6" SAND CAPACITY: 95 GAL.
LIQUID CAPACITY: 250 GAL. COVER: PEDESTRIAN-RATED
OIL CAPACITY: 62.5 GAL. CERTIFIED FLOW RATE: 100 GPM

OS-350

99%
EFFICIENT



CONNECTIONS: 4", 6" SAND CAPACITY: 114 GAL.
LIQUID CAPACITY: 350 GAL. COVER: CAST IRON (H-20)
OIL CAPACITY: 87.5 GAL. CERTIFIED FLOW RATE: 100 GPM

OS-500

99%
EFFICIENT



CONNECTIONS: 4", 6" SAND CAPACITY: 195 GAL.
LIQUID CAPACITY: 500 GAL. COVER: CAST IRON (H-20)
OIL CAPACITY: 125 GAL. CERTIFIED FLOW RATE: 100 GPM

- ✓ Certified to IAPMO IGC 325, the industry's first oil separator **performance** standard.
- ✓ Meets EPA hydrocarbon discharge guidance of 100 ppm or less.¹




OIL TANKER SERIES:

OT-750




CONNECTIONS: 4", 6", 8"
LIQUID CAPACITY: 750 GAL.
OIL CAPACITY: 323 GAL.
SAND CAPACITY: 295 GAL.
COVER: CAST IRON (H-20)

OT-1000




CONNECTIONS: 4", 6", 8"
LIQUID CAPACITY: 1,000 GAL.
OIL CAPACITY: 370 GAL.
SAND CAPACITY: 477 GAL.
COVER: CAST IRON (H-20)

OT-1500



CONNECTIONS: 4", 6", 8"
LIQUID CAPACITY: 1,500 GAL.
OIL CAPACITY: 488 GAL.
SAND CAPACITY: 825 GAL.
COVER: CAST IRON (H-20)

OT-2000



CONNECTIONS: 4", 6", 8"
LIQUID CAPACITY: 2,000 GAL.
OIL CAPACITY: 638 GAL.
SAND CAPACITY: 1,077 GAL.
COVER: CAST IRON (H-20)



FEATURES

- Constructed of non-corrosive Polyethylene
- Lightweight for easy installation
- Reinforced for direct burial

OPTIONS

- Field-adjustable extensions
- High water anchor kits
- Slick Stick™ oil level monitoring system

SPEC FORMATS



AVAILABLE ONLINE FOR ALL PRODUCTS