

OIL TANKER™SERIES

VOLUME-BASED OIL SEPARATORS

THE INDUSTRY'S FIRST CERTIFIED POLYETHYLENE OIL SEPARATOR


(3) manways provide full access

Built-in lifting lugs

Vent connection option at each endwall

Structurally reinforced endwalls

Cylindrical construction allows for easy pumpout of settled solids

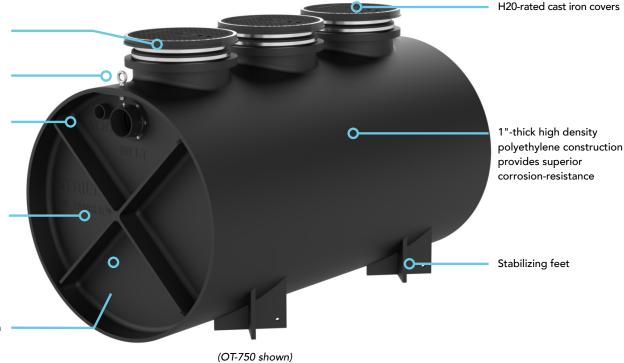





APPLICATIONS



AUTO SERVICE/ REPAIR STATIONS



FIRE HOUSE/ **POLICE STATIONS**



PARKING GARAGES



HYDRAULIC ELEVATOR PITS



CAR WASHES




LOADING **DOCKS**



AIRPORTS / **HANGARS**













OIL TANKER™SERIES


VOLUME-BASED OIL SEPARATORS



OT-750

CONNECTIONS: 4", 6", or 8" OIL CAPACITY: 323 GAL. MAX FLOW RATE: 314 GPM SAND CAPACITY: 295 GAL.

LIQUID CAPACITY: 750 GAL.



OT-1000

CONNECTIONS: 4", 6", or 8" MAX FLOW RATE: 314 GPM OIL CAPACITY: 370 GAL. SAND CAPACITY: 477 GAL.

LIQUID CAPACITY: 1,000 GAL.



OT-1500

CONNECTIONS: 4", 6", or 8" MAX FLOW RATE: 314 GPM OIL CAPACITY: 488 GAL.

SAND CAPACITY: 825 GAL.

LIQUID CAPACITY: 1,500 GAL.



OT-2000

CONNECTIONS: 4", 6", or 8" MAX FLOW RATE: 314 GPM OIL CAPACITY: 638 GAL.

SAND CAPACITY: 1,077 GAL.

LIQUID CAPACITY: 2,000 GAL.

OPTIONS



- SR/LR field-adjustable extensions
- Corrugated Pipe Riser Kit (CPRK)
- High water hold down kits
- Slick Stick™oil level monitoring system
- Coalescing media

SPEC FORMATS











*AVAILABLE ONLINE FOR ALL PRODUCTS



