SPECIFICATIONS


- 1. 4" Plain End inlet/outlet, C24-HP cover standard.
- 2. Liquid capacity: 110 Gallons.
- Solids capacity: 70 Gallons.
- 4. Unit weight w/ standard cover: 180 lbs.
- 5. Maximum operating temperature 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- Narrow footprint allows clearance through doorways and down stairs.
- Diptube is removable to inspect or clean piping.
- 6. Maximum burial depth: 72" from standard cover height.


ENGINEER SPECIFICATION GUIDE


Striem solids interceptor model CB-125-S shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Interceptor liquid holding capacity shall be 110 gallons and solids capacity shall be 70 gallons. Cover shall be H20 rated pickable cast iron.

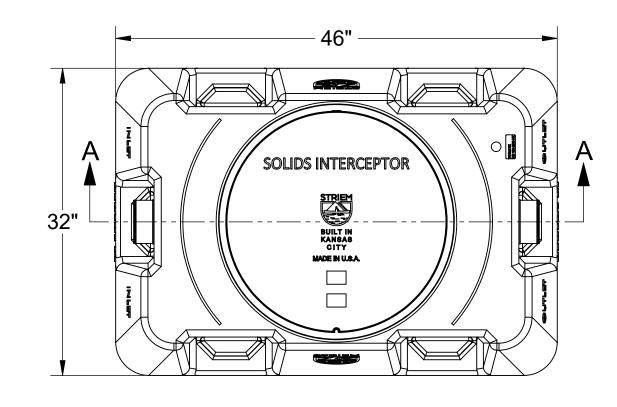


TOP VIEW

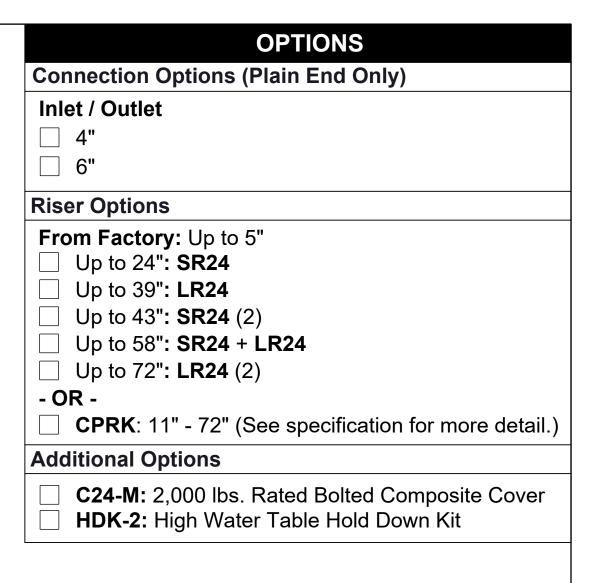

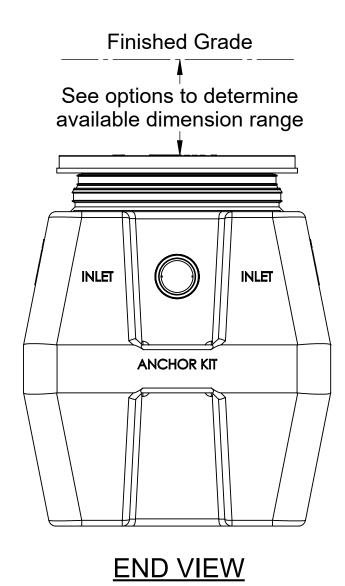

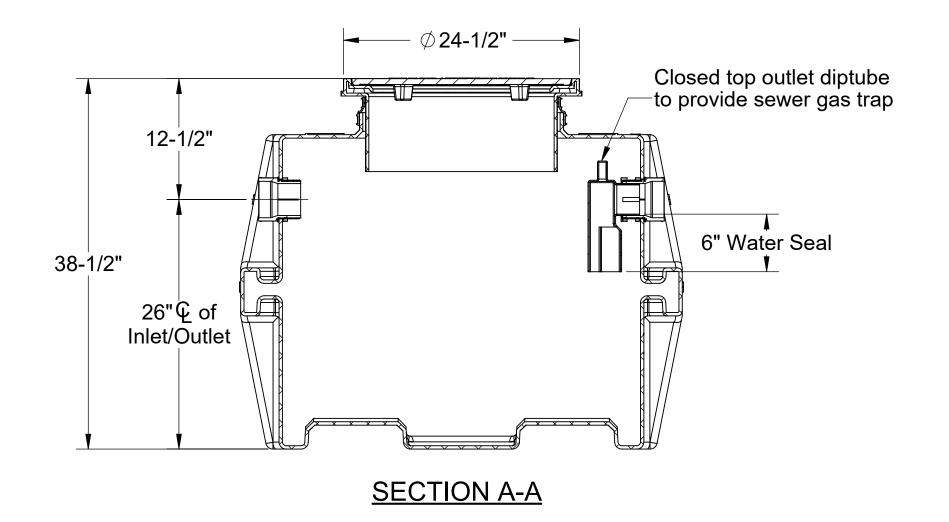



POLYETHYLENE CATCH BASIN

Made in the U.S.A

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

SPECIFICATION SHEET

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

DWG BY: ENG

MODEL NUMBER:

DESCRIPTION:

DATE:

9/16/2025

CB-125-S

REV: