## **SPECIFICATIONS**


- 1. 4" Plain End inlet/outlet, C24-HP covers standard.
- Liquid capacity: 250 Gallons.
- Solids capacity: 200 Gallons.
   Unit weight w/ standard covers: 345 lbs.
- 5. Maximum operating temperature 140°F continuous.

## **NOTES**


- 1. For gravity drainage applications only.
- Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Narrow footprint allows clearance through doorways and down stairs.
- Diptube is removable to inspect or clean piping.
- 6. Maximum burial depth: 90" from standard cover height.

## **ENGINEER SPECIFICATION GUIDE**

Striem solids interceptor model CB-275-S shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Interceptor liquid holding capacity shall be 250 gallons and solids capacity shall be 200 gallons. Covers shall be H20 rated pickable cast iron.

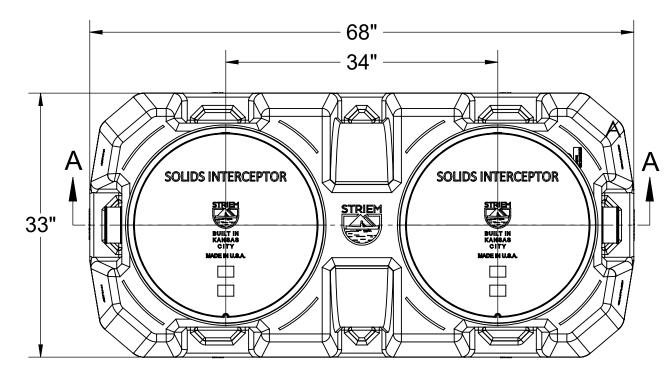

**TOP VIEW** 

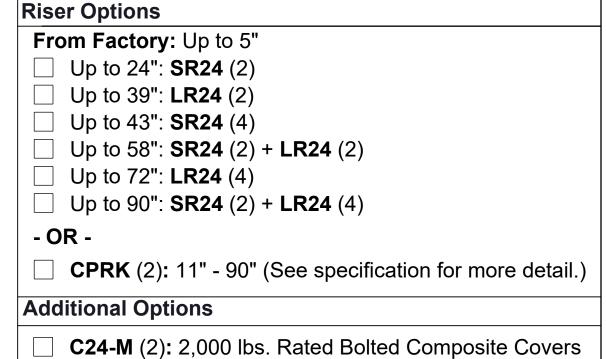

HDK-2: High Water Table Hold Down Kit

**OPTIONS** 


Connection Options (Plain End Only)


Inlet / Outlet

**4"** 


**6**"

Closed top outlet

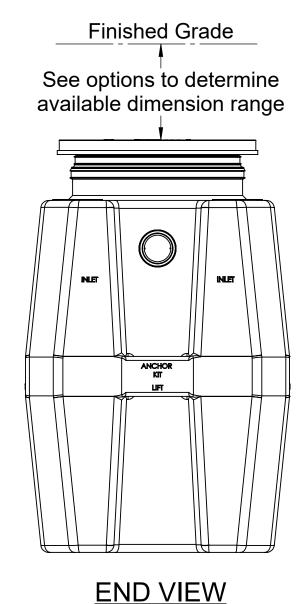

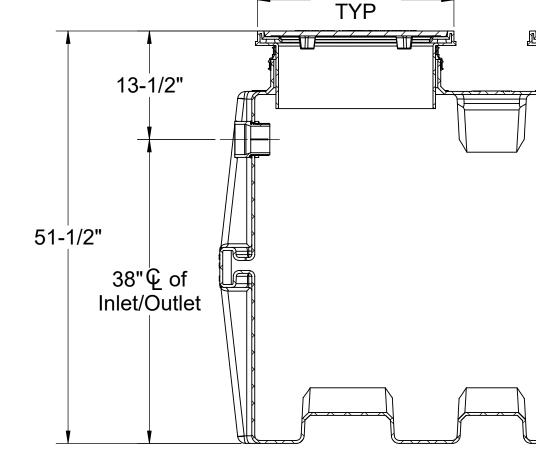

Ø 24-1/2"

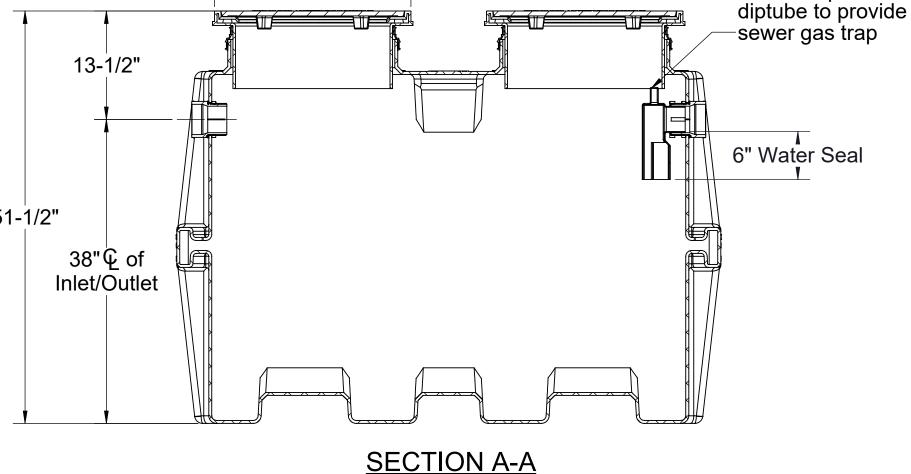

**DESCRIPTION:** POLYETHYLENE CATCH BASIN

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

Made in the U.S.A

**SPECIFICATION SHEET** 

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

**DWG BY:** ENG

**MODEL NUMBER:** 

DATE:

9/15/2025

CB-275-S

**REV**:

0