


SPECIFICATIONS


- 1. 4" Plain End inlet/outlet, C24-HP cover standard.
- 2. Unit weight w/ standard cover: 105 lbs.
- 3. Maximum operating temperature 140°F continuous.
- 4. Maximum burial depth: 106" from standard cover height.

ENGINEER'S SPECIFICATION GUIDE


Striem sampling port model INSPECTOR-4 shall be lifetime guaranteed and made in the USA. Sampling port shall be constructed of polyethylene. Sampling port shall be manufactured for above- or below-grade installation. Sampling port shall provide integral flow-capture feature for ease of sampling. Field-adjustable riser system is available as an option to bring manhole cover to grade. Cover shall be H20 pickable cast iron.

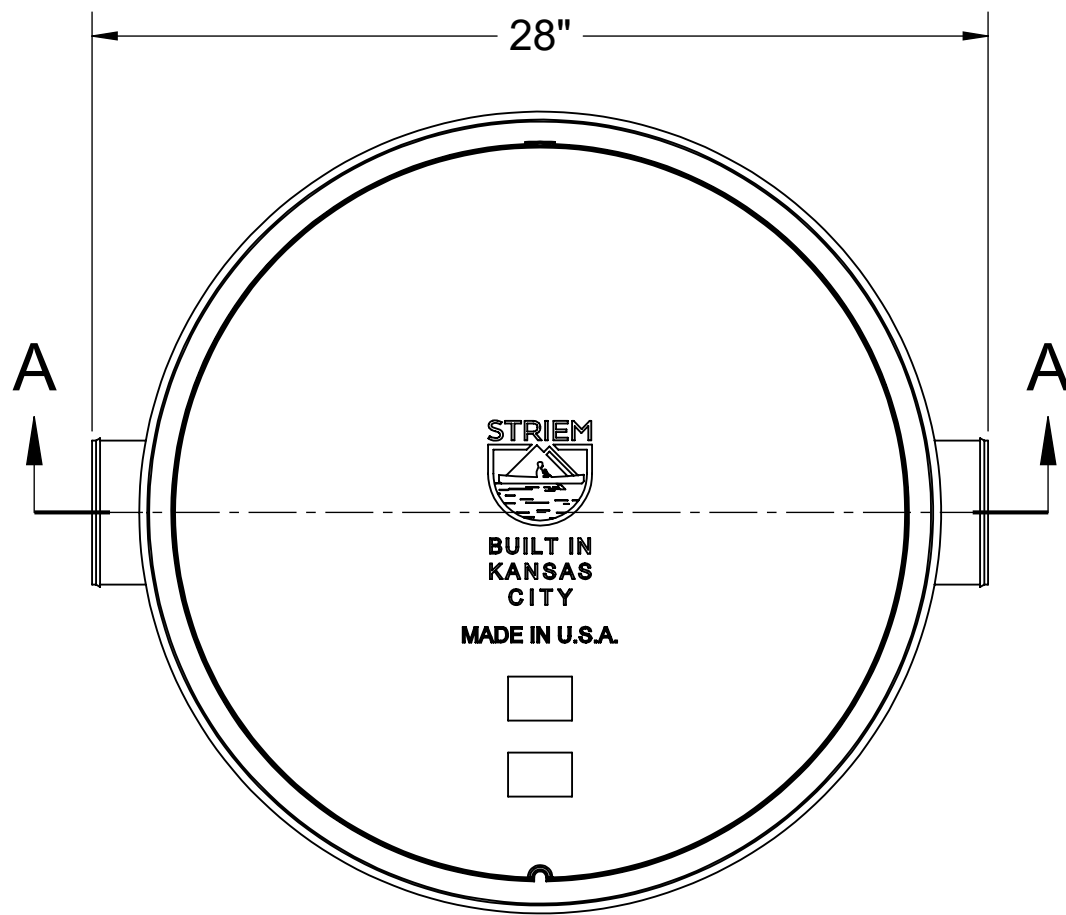

TOP VIEW

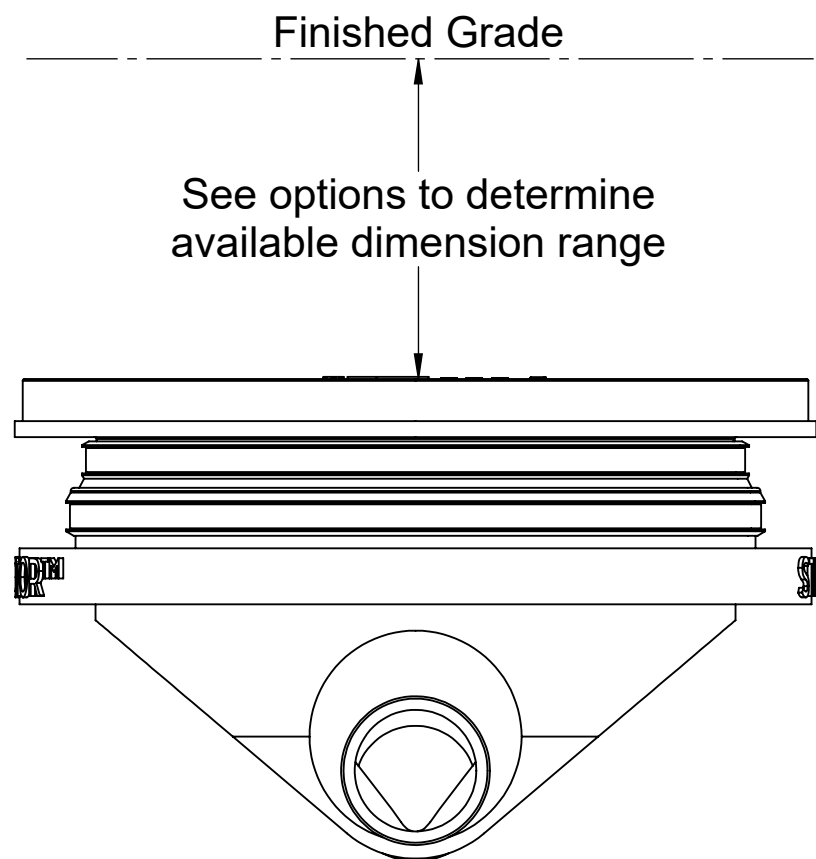

END VIEW

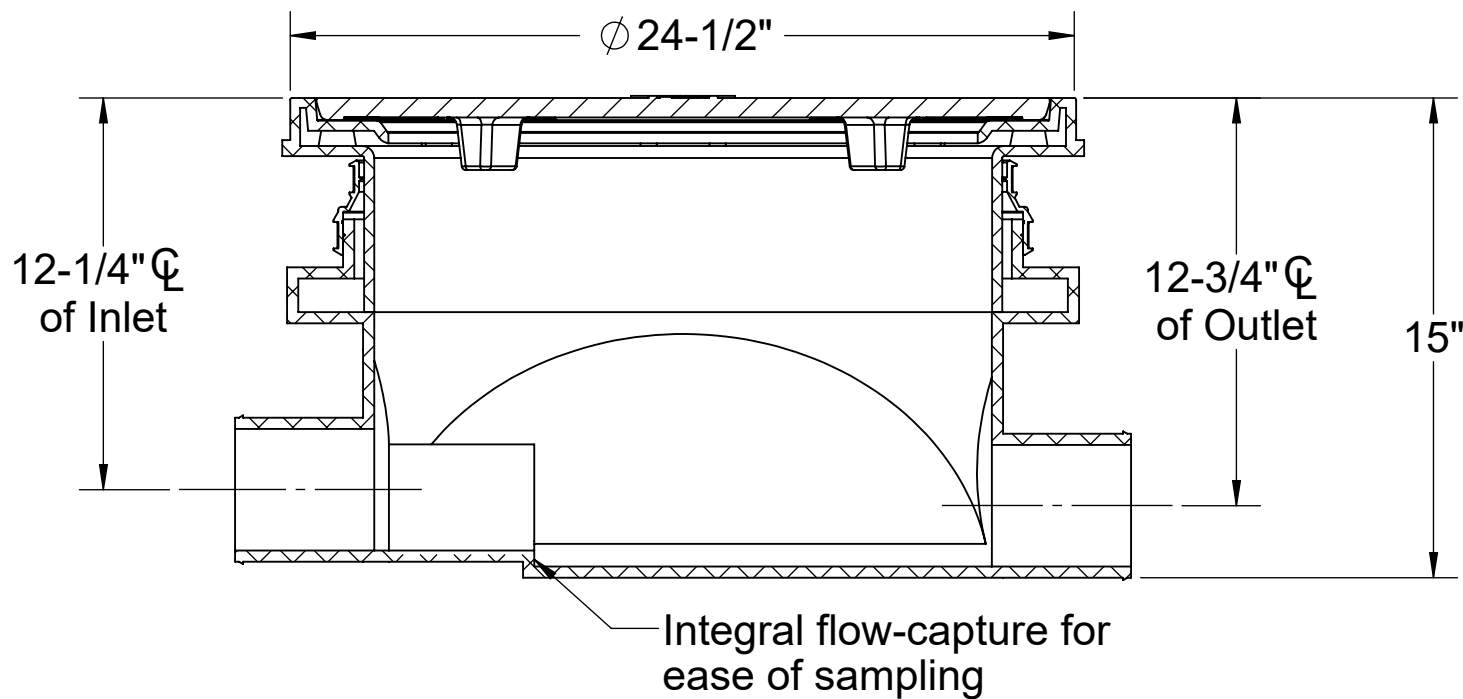

SECTION A-A

OPTIONS

Riser Options

- From Factory: Up to 5"
- ☐ Up to 24": **SR24**
 - ☐ Up to 39": **LR24**
 - ☐ Up to 43": **SR24 (2)**
 - ☐ Up to 58": **SR24 + LR24**
 - ☐ Up to 72": **LR24 (2)**
 - ☐ Up to 90": **SR24 + LR24 (2)**
 - ☐ Up to 106": **LR24 (3)**

- OR -


- ☐ **CPRK:** 11" - 106" (See specification for more detail.)

Additional Options

- ☐ **C24-M:** 2,000 lbs. Rated Bolted Composite Cover



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER:			INSPECTOR-4			SPECIFICATION SHEET					
DESCRIPTION: POLYETHYLENE WASTEWATER SAMPLING PORT						<div>Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com</div> <div>Made in the U.S.A</div>			<div>STRIEM</div> 		
DWG BY: ENG		DATE: 9/16/2025		REV: 2							