SPECIFICATIONS


- 2" Plain End inlet, 3" Plain End vents, C24-HP cover standard.
- 2. Oil capacity: 110 gallons (14.7 cu ft).
- Unit weight w/ standard cover: 180 lbs.
- 4. Maximum operating temperature: 140°F continuous.

NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- 4. Narrow footprint allows clearance through doorways and down stairs.
- Cover placement allows full access to tank for proper maintenance.
- 6. Maximum burial depth: 72" (69" w/ monitoring) from standard cover height.


ENGINEER SPECIFICATION GUIDE

Striem oil collection tank model OCT-125 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene. Tank shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Tank oil collection capacity shall be 110 gallons. Cover shall be H20 rated pickable cast iron.

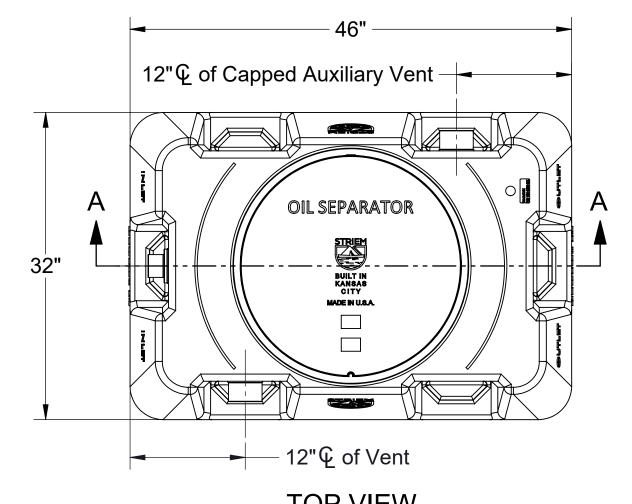




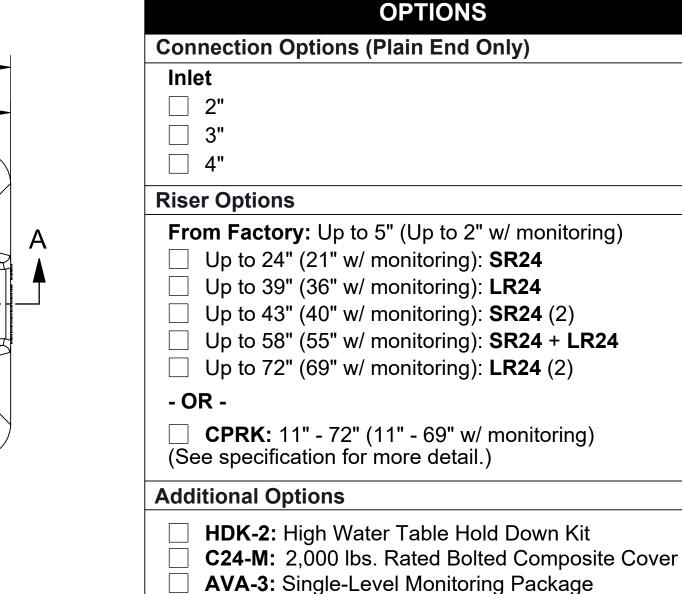


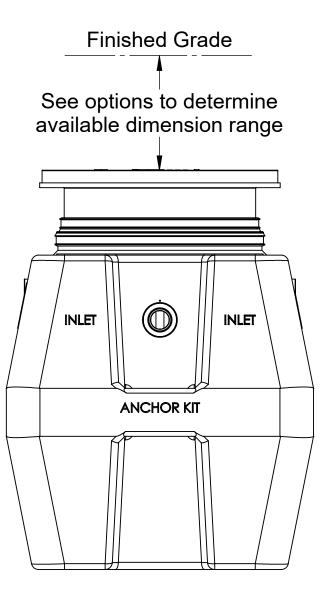



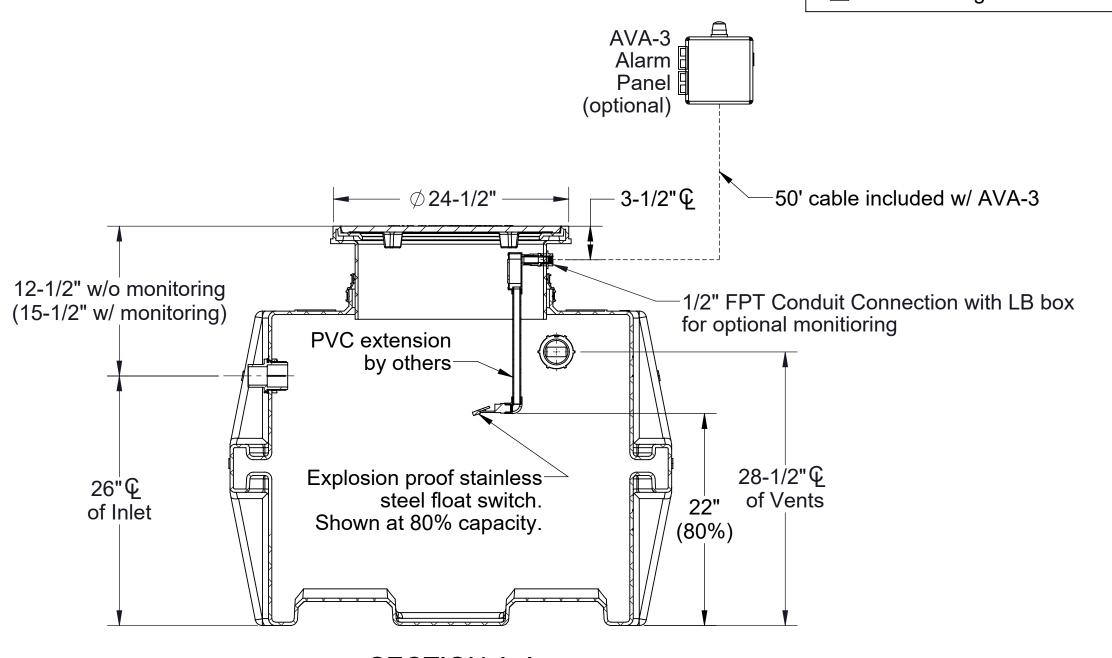



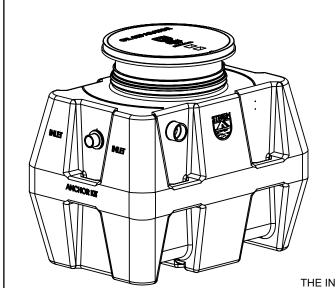

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

DESCRIPTION: 110 GALLON POLYETHYLENE **OIL COLLECTION TANK**

DWG BY: ENG

MODEL NUMBER:

DATE:

9/17/2025

REV:

OCT-125

Made in the U.S.A 2

SPECIFICATION SHEET

Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com

