SPECIFICATIONS


- 1. 2" Plain End inlet, 3" Plain End vents, C24-HP covers standard.
- 2. Oil capacity: 250 Gallons (33.4 cu ft).
- 3. Unit weight w/ standard covers: 340 lbs.
- 4. Maximum operating temperature: 140°F continuous.


NOTES


- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- 4. Narrow footprint allows clearance through doorways and down stairs.
- 5. Cover placement allows full access to tank for proper maintenance
- 6. Maximum burial depth: 90" (87" w/ monitoring) from standard cover height.

ENGINEER SPECIFICATION GUIDE


Striem oil collection tank model OCT-275 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene. Tank shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Tank oil collection capacity shall be 250 gallons. Covers shall be H20 rated pickable cast iron cover.

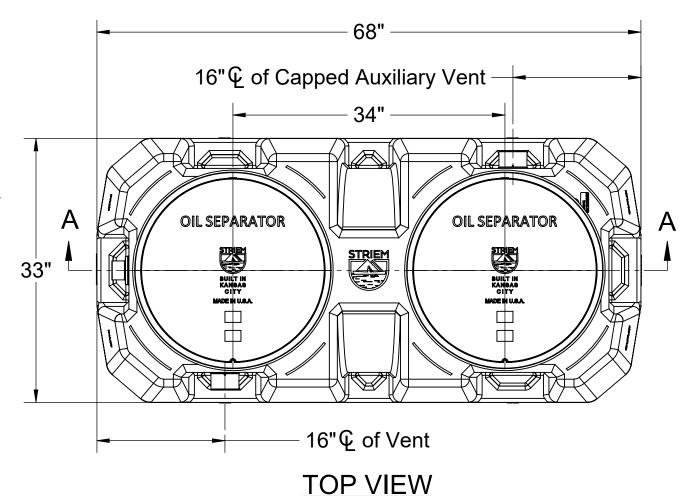

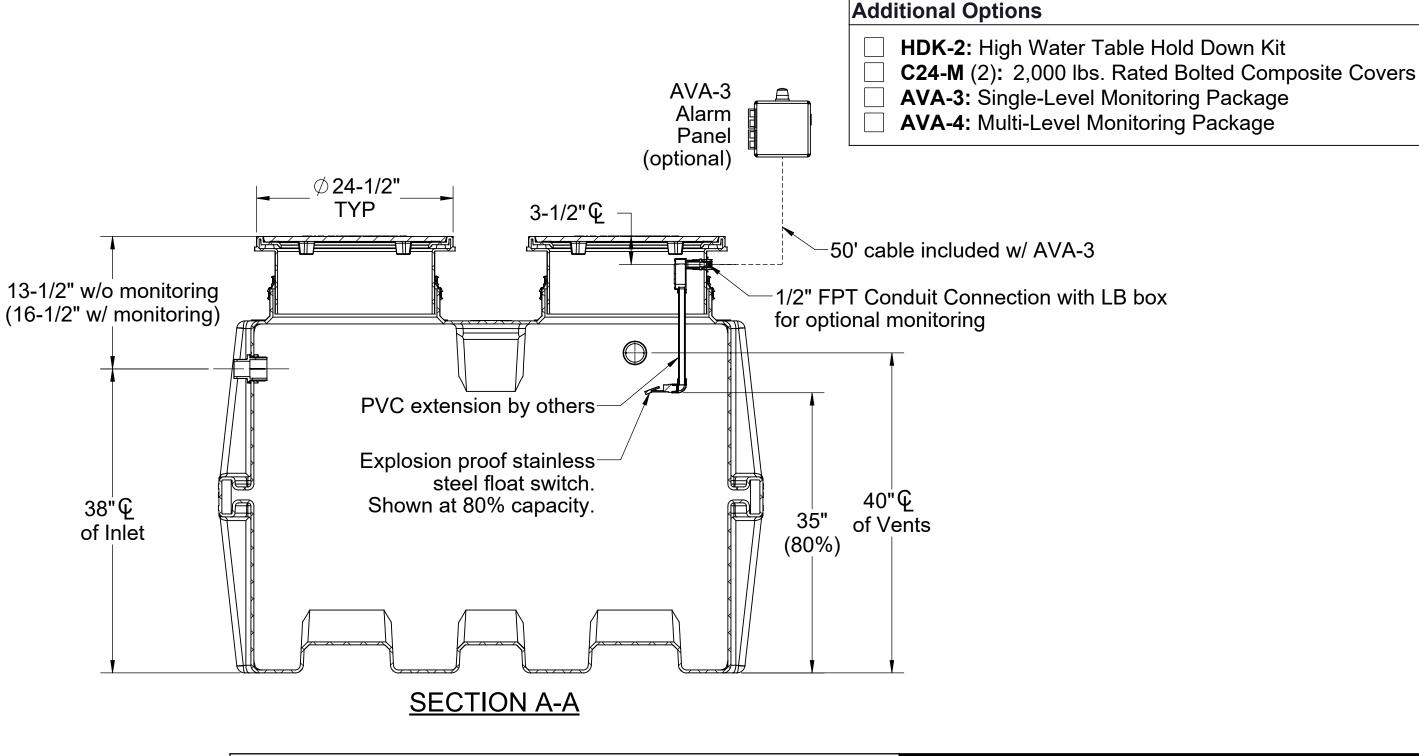

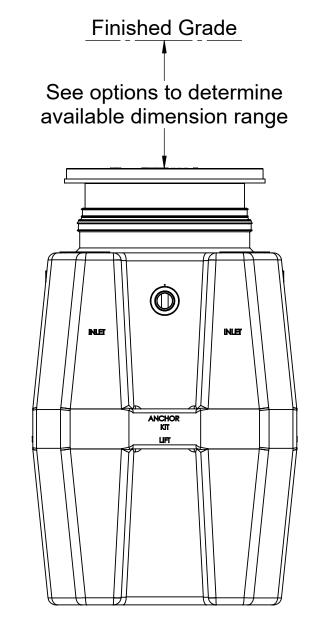

END VIEW



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER:

OCT-275

DESCRIPTION:

250 GALLON POLYETHYLENE OIL COLLECTION TANK

DWG BY: ENG

DATE:

9/17/2025

REV: 1

SPECIFICATION SHEET

OPTIONS

Connection Options (Plain End Only)

From Factory: Up to 5" (Up to 2" w/ monitoring)

Up to 24" (21" w/ monitoring): **SR24** (2)

Up to 39" (36" w/ monitoring): **LR24** (2)

Up to 43" (40" w/ monitoring): **SR24** (4)

Up to 72" (69" w/ monitoring): **LR24** (4)

(See specification for more detail.)

Up to 58" (55" w/ monitoring): **SR24** (2) + **LR24** (2)

Up to 90" (87" w/ monitoring): **SR24** (2) + **LR24** (4)

CPRK (2): 11" - 90" (11" - 87" w/ monitoring)

Inlet

2"

4"

- OR -

3"

6"

Riser Options

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

