



TOP VIEW

Striem oil separator model OS-1500-WSSC shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene with 7/8" nominal wall thickness. Separator shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 314 GPM. Separator liquid holding capacity shall be 1500 gallons and oil capacity shall be 1175 gallons. Covers shall be H20 rated pickable cast iron. Finished Grade See options to determine

ENGINEER SPECIFICATION GUIDE

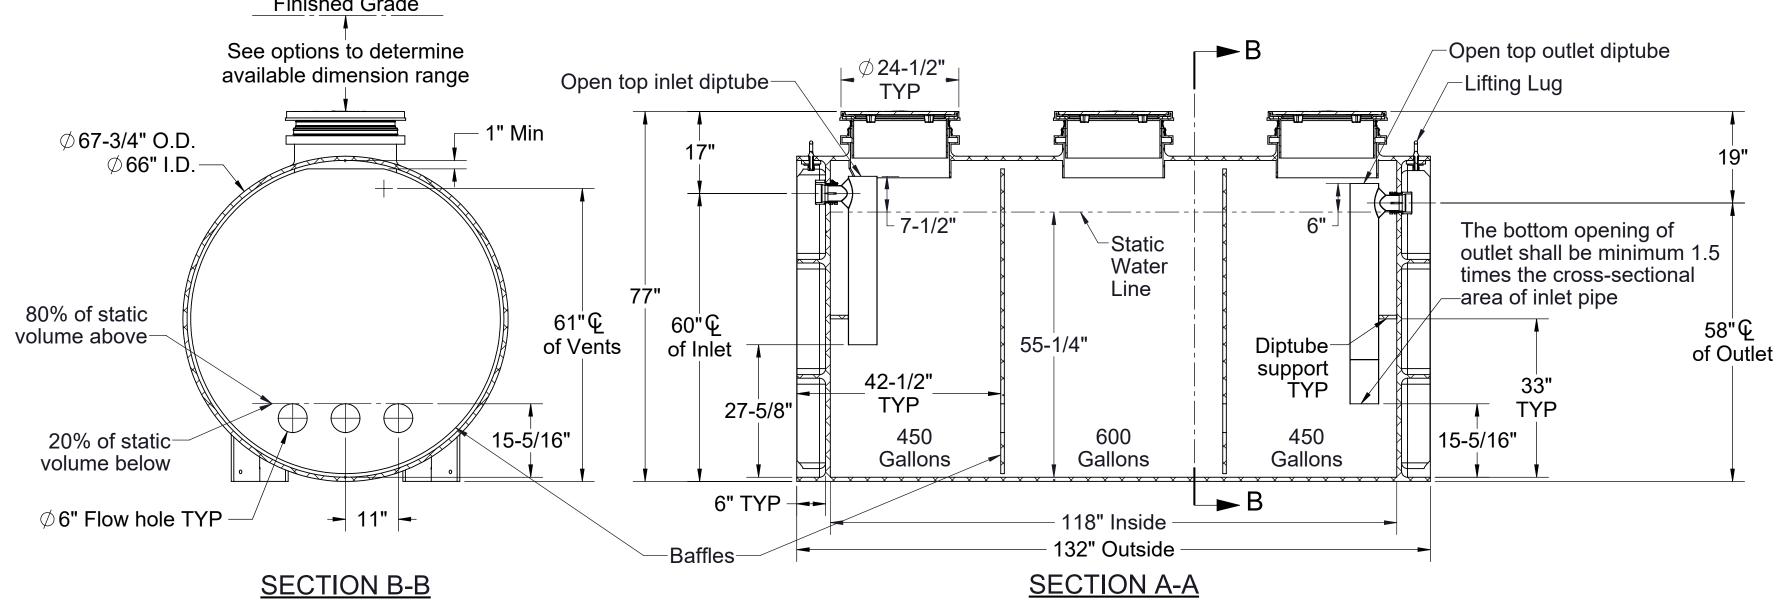

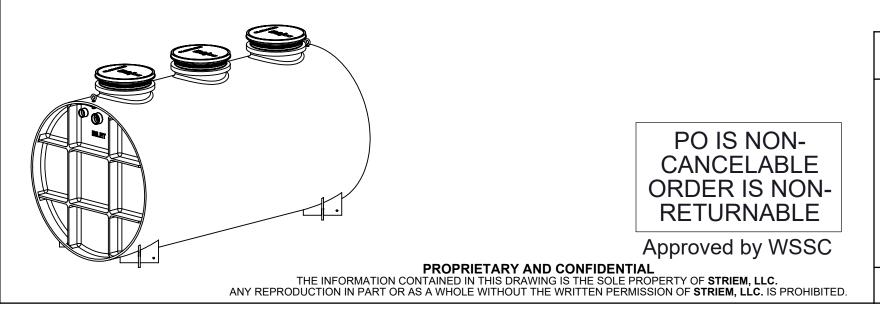

MODEL NUMBER: OS-1500-WSSC DESCRIPTION: POLYETHYLENE OIL SEPARATOR 314 GPM 1500 GALLON CAPACITY **DWG BY:** ENG 9/15/2025 DATE: **REV**: 0

Made in the U.S.A

Striem

Kansas City, KS

Tel: 913-222-1500

orders@striemco.com

www.striemco.com

