

SPECIFICATIONS


- 1. 4" Plain End inlet/outlet, C24-HP covers standard.
- 2. Max flow rate: 100 GPM.
- 3. Liquid capacity: 250 Gallons.
- 4. Solids capacity: 210 Gallons.
- 5. Unit weight w/ standard covers: 380 lbs.
- 6. Maximum operating temperature 140 °F continuous.

NOTES

- 1. For gravity drainage applications only.
- 2. Do not use for pressure applications.
- 3. Cover placement allows full access to tank for proper maintenance.
- 4. Narrow footprint allows clearance through doorways and down stairs.
- 5. Removable filter screen for easy maintenance.
- 6. Maximum burial depth: 90" from standard cover height.

ENGINEER SPECIFICATION GUIDE

Striem solids interceptor model PS-275-S shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Interceptor shall have corrosion-resistant removable filter screen with 1/4" perforations. Interceptor liquid holding capacity shall be 250 gallons and solids capacity shall be 210 gallons. Covers shall be H20 rated pickable cast iron.

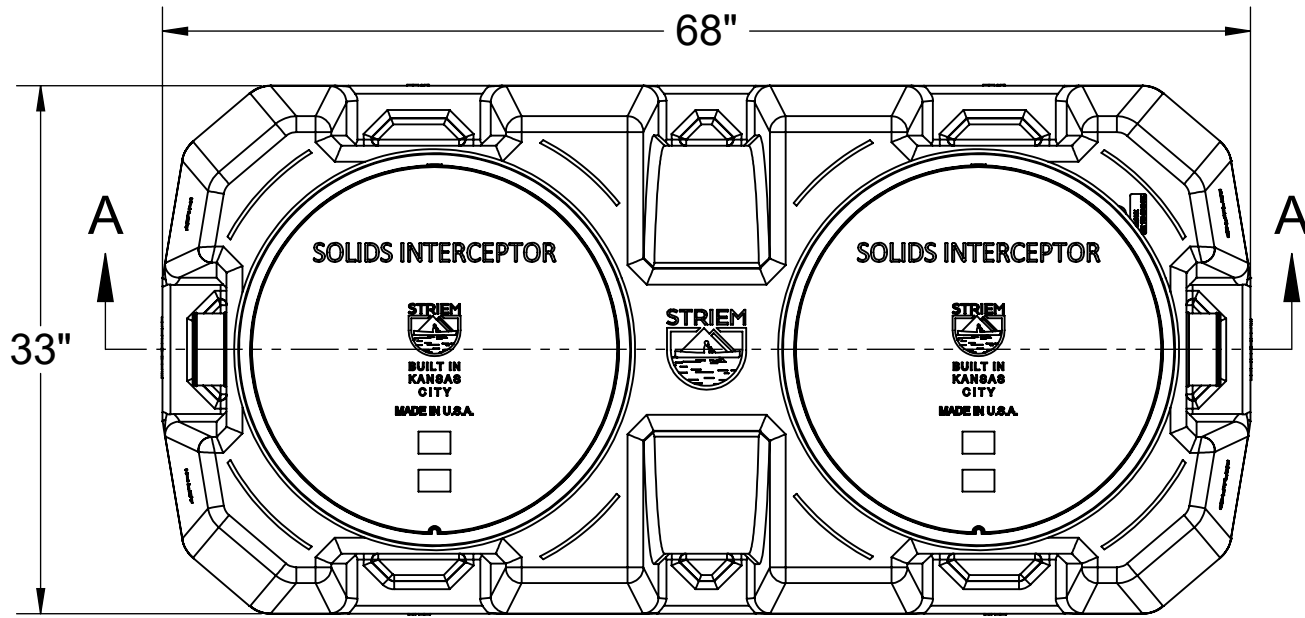

TOP VIEW

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet

- ☐ 4"
- ☐ 6"


Riser Options

From Factory: Up to 5"


- ☐ Up to 24": **SR24** (2)
- ☐ Up to 39": **LR24** (2)
- ☐ Up to 43": **SR24** (4)
- ☐ Up to 58": **SR24** (2) + **LR24** (2)
- ☐ Up to 72": **LR24** (4)
- ☐ Up to 90": **SR24** (2) + **LR24** (4)

Additional Options


- ☐ **HDK-2:** High Water Anchor Kit
- ☐ **C24-M** (2): 2,000 lbs. Rated Bolted Composite Covers

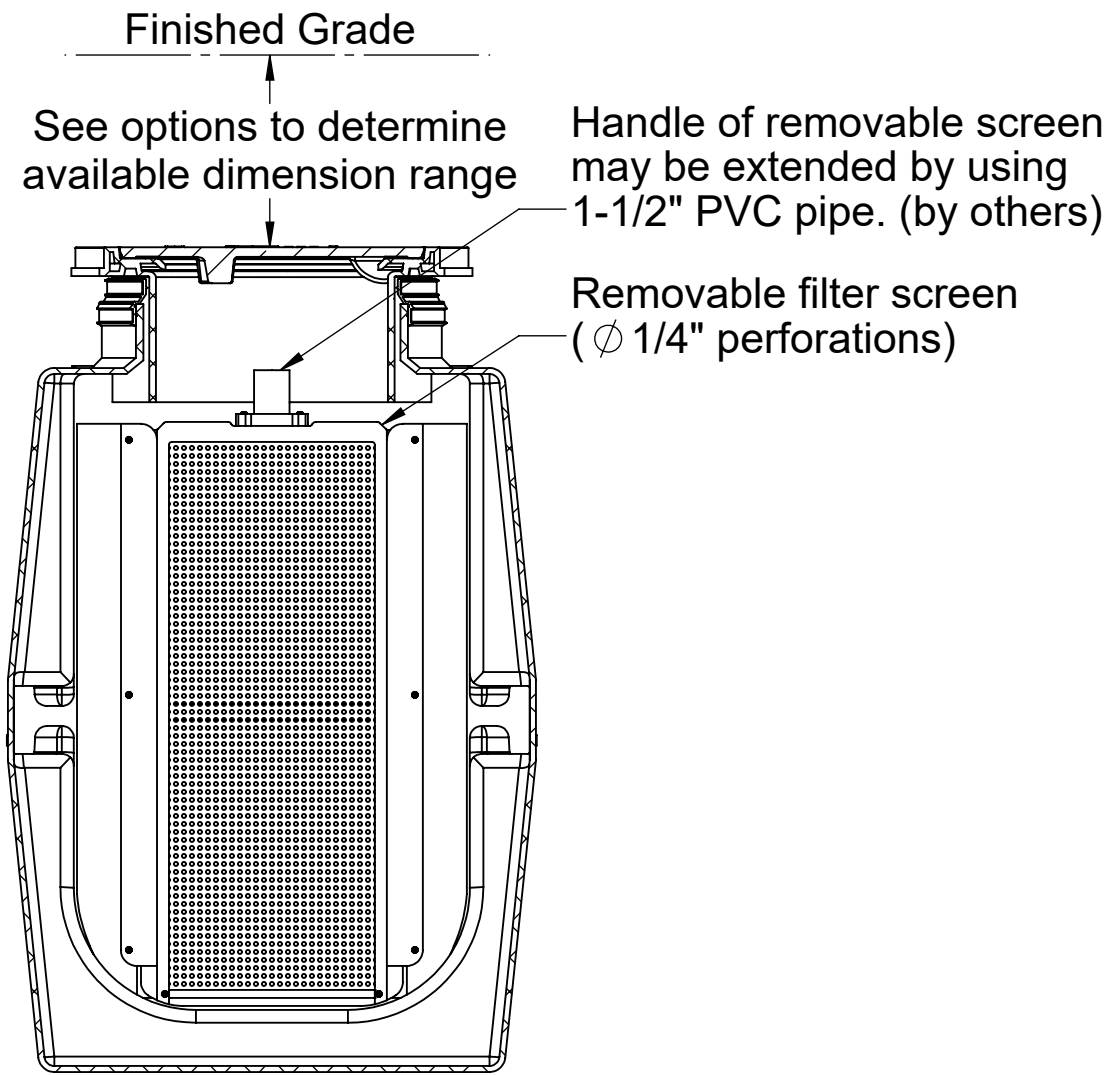

SECTION B-B

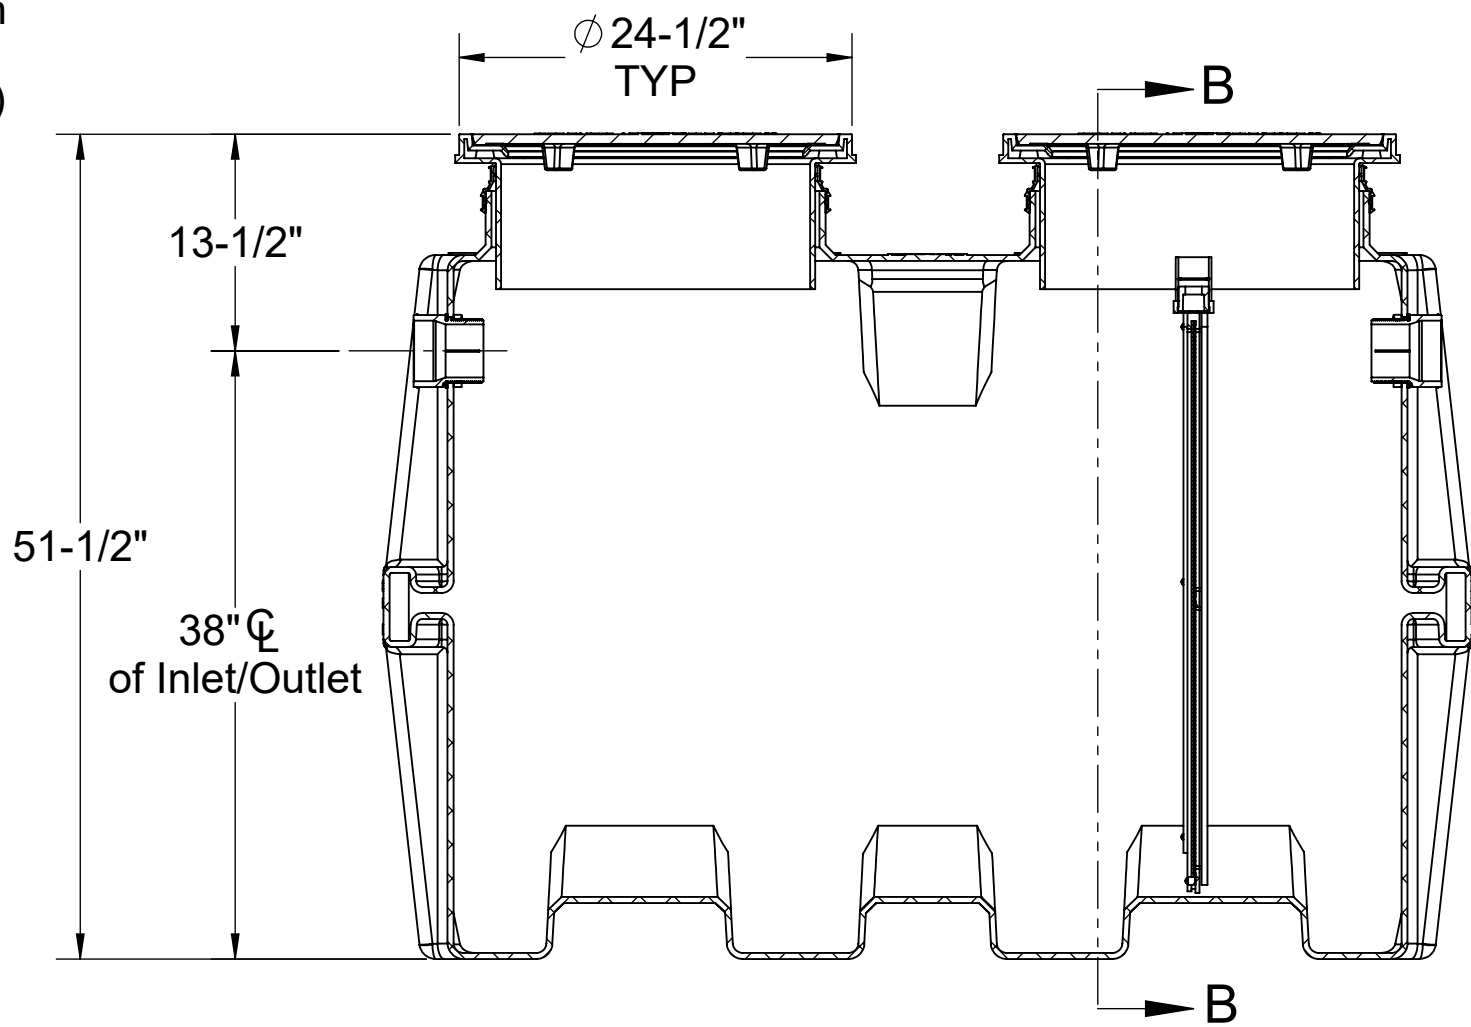

SECTION A-A

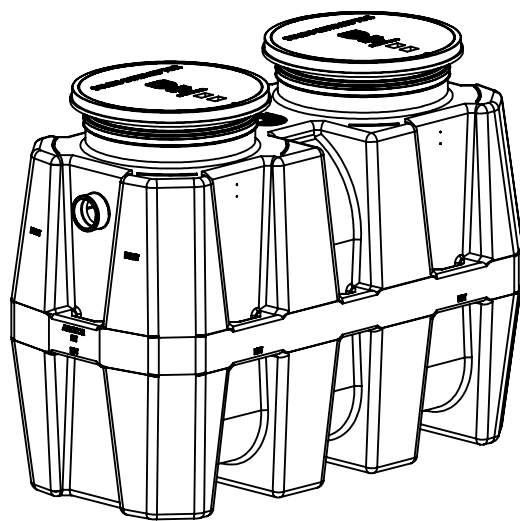

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER: PS-275-S

DESCRIPTION:

POLYETHYLENE SCREEN STYLE
SOLIDS INTERCEPTOR
250 LIQUID GALLON CAPACITY

DWG BY: ENG DATE: 9/16/2025 REV: 3

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

