
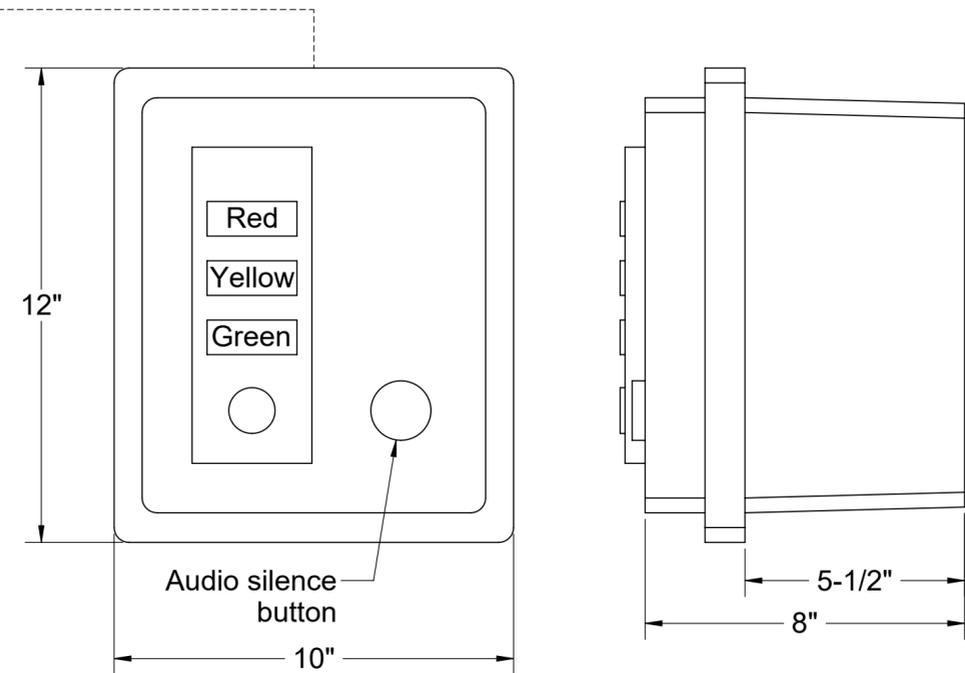


SPECIFICATIONS

1. Manufactured using UL listed components.
2. Power requirement 120 VAC for DC supply.
3. 24 VDC for float switches and enunciator.
4. Operating temperature for panel 32-140 °F.
5. Float switch to be mounted per installation instructions.
6. NEMA 4X fiberglass, corrosion-resistant, weatherproof enclosure suitable for outdoor use and damp environments.
7. NEMA 4X alarm buzzer, 95dB @ 2' (0.6 meters).
8. Unit comes supplied with extra dry contact for connection to a building alarm system.
9. 10' of cable included.

ENGINEER SPECIFICATION GUIDE

Multi-level audio/visual alarm shall be as manufactured by Striem, LLC. Alarm panel to be UL listed components contained inside a NEMA 4X Enclosure. Alarm panel to be wired to a type 304 stainless steel explosion proof multi-level switch for multiple level monitoring.

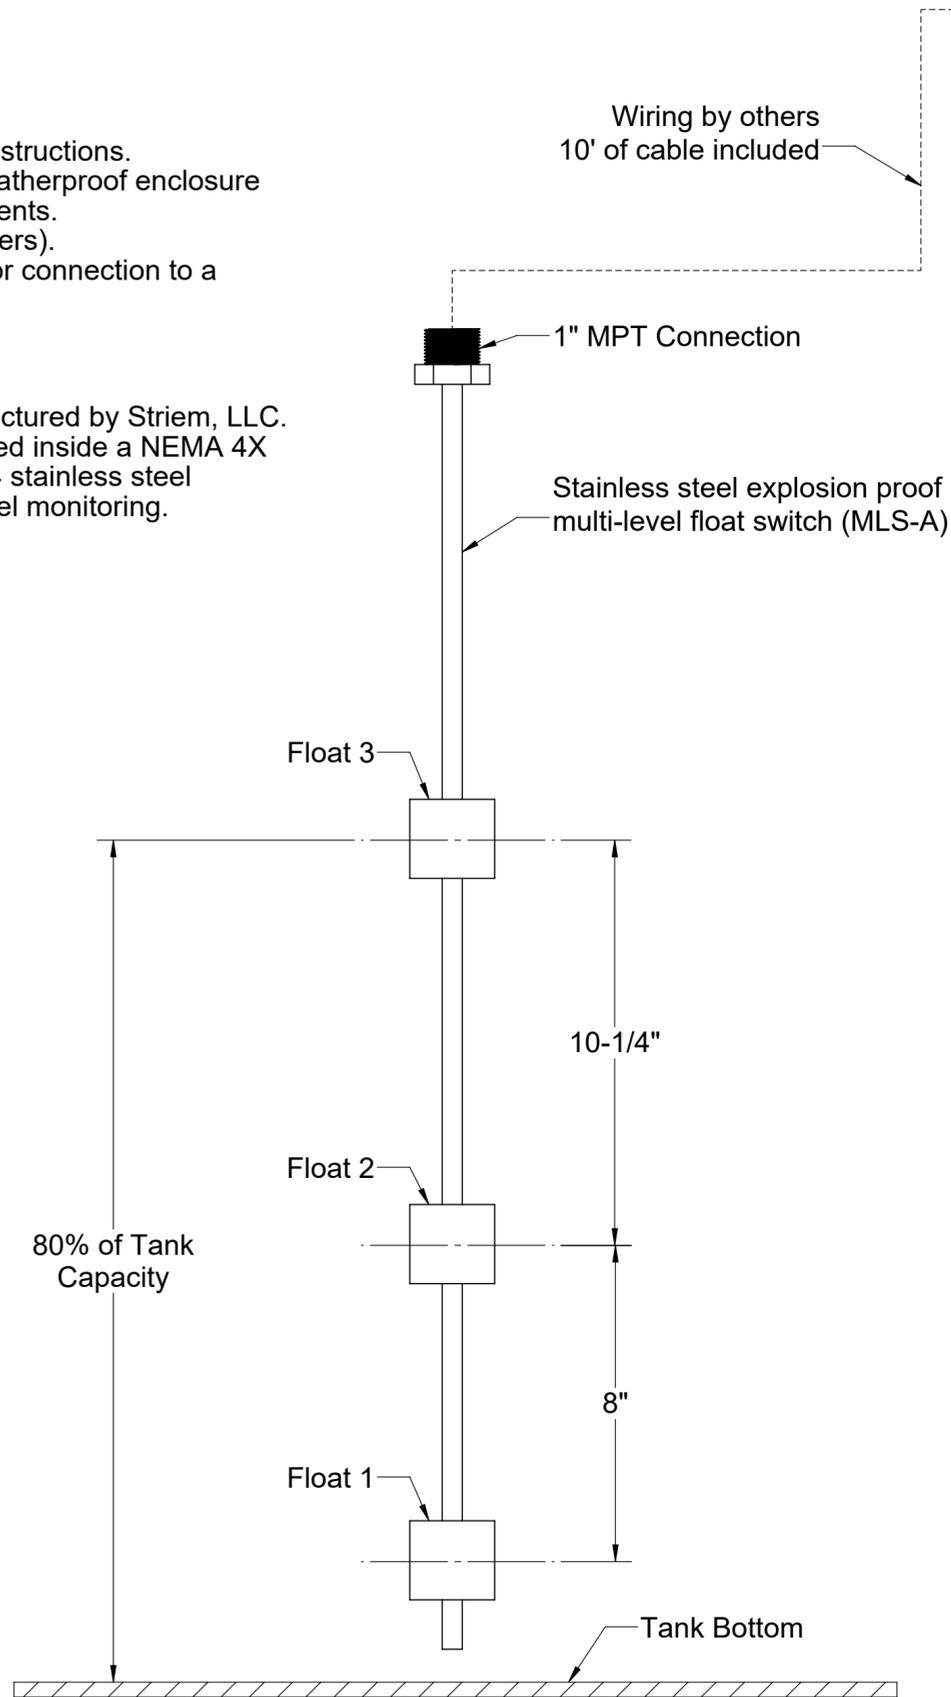

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

MODEL NUMBER: AVA-4

DESCRIPTION:
MULTI-LEVEL MONITOR
REMOTE AUDIO VISUAL ALARM

DWG BY: ENG **DATE:** 3/3/2026 **REV:** 1

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

