

SPECIFICATIONS


- 6" Plain End inlet/outlet shown, 3" Plain End vents, H2O traffic-rated cast iron covers standard.
- Liquid capacity: 1500 gallons (201 cu. ft.).
- Solids capacity: 1364 gallons.
- Unit weight w/ standard covers: 1496 lbs.
- Maximum operating temperature: 140 °F continuous.

NOTES

- For gravity drainage applications only.
- Do not use for pressure applications.
- Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- Cover placement allows full access to tank for proper maintenance.
- Lifting lug set for easy install.
- Maximum burial depth: 106" from standard cover height.


ENGINEER SPECIFICATION GUIDE

Striem solids interceptor model CB-1500-SFL shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene with 7/8" nominal wall thickness. Interceptor shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Interceptor liquid holding capacity shall be 1500 gallons and solids capacity shall be 1364 gallons. Covers shall be H2O traffic-rated pickable cast iron.

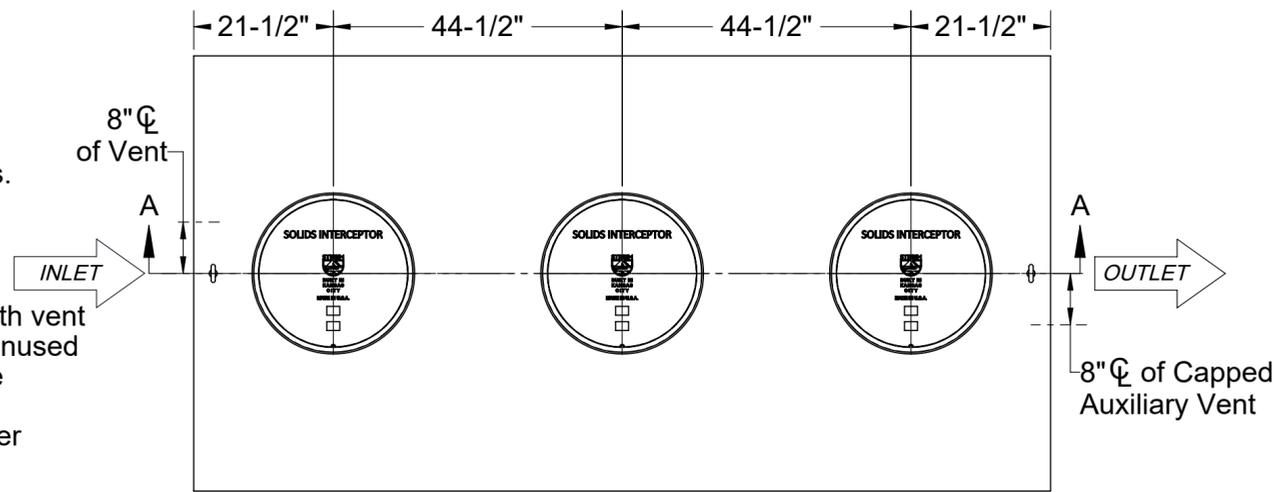


TOP VIEW


| OPTIONS | |
|---|-----------------------|
| Connection Options (Plain End Only) | |
| Inlet | SELECTION REQUIRED |
| <input type="checkbox"/> 4" | |
| <input type="checkbox"/> 6" | |
| Riser Options | |
| From Factory: 0" - 5" | |
| <input type="checkbox"/> Up to 24": SR24 (3) | |
| <input type="checkbox"/> Up to 39": LR24 (3) | |
| <input type="checkbox"/> Up to 43": SR24 (6) | |
| <input type="checkbox"/> Up to 58": SR24 (3) + LR24 (3) | |
| <input type="checkbox"/> Up to 72": LR24 (6) | |
| <input type="checkbox"/> Up to 90": SR24 (3) + LR24 (6) | |
| <input type="checkbox"/> Up to 106": LR24 (9) | |
| - OR - | |
| <input type="checkbox"/> CPRK (3): 11" - 106" (See specification for more detail.) | |
| Additional Options | |
| <input type="checkbox"/> C24-M (3): 2,000 lbs. Rated Bolted Composite Covers | |
| <input type="checkbox"/> HDK-6 : High Water Table Hold Down Kit | |

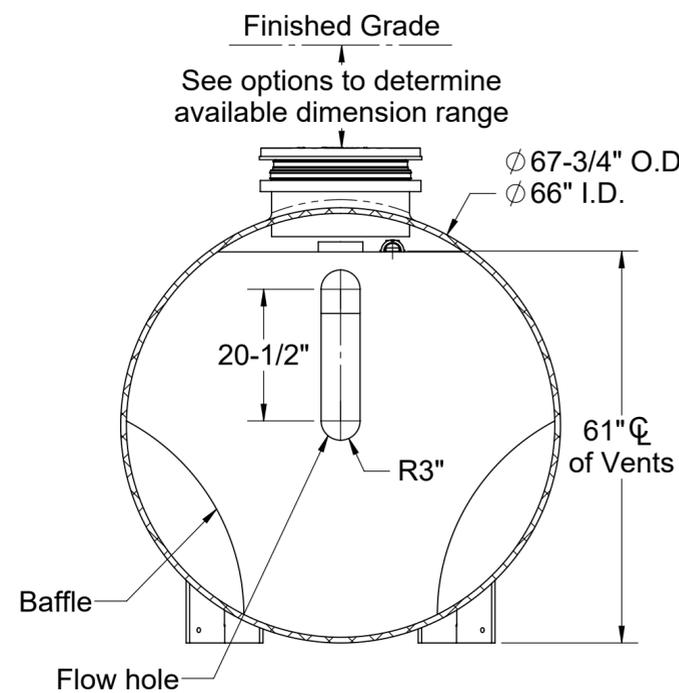

SECTION B-B

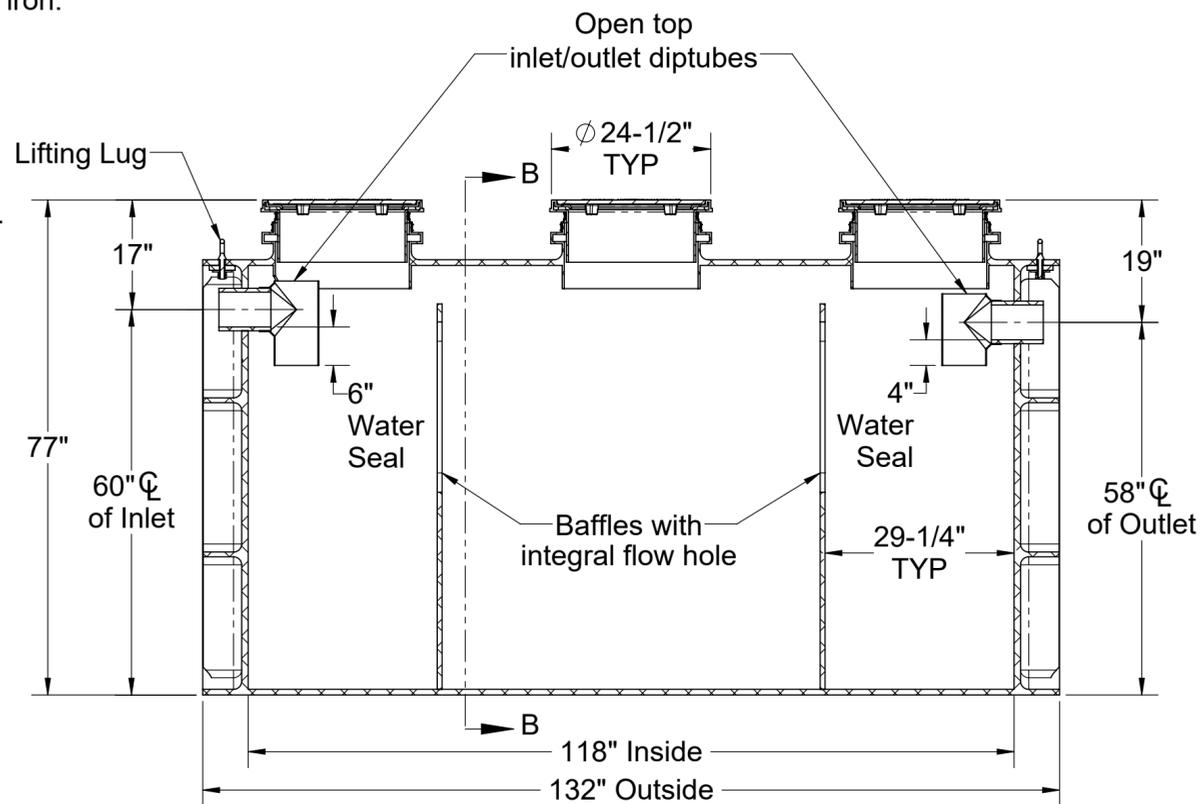

SECTION A-A

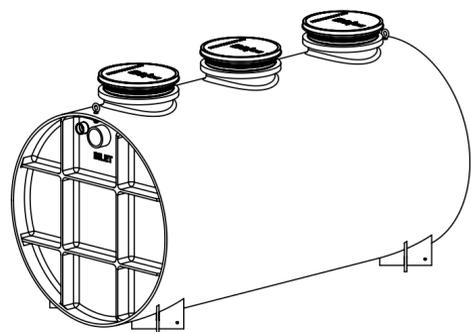

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

| | |
|----------------------|--|
| MODEL NUMBER: | CB-1500-SFL |
| DESCRIPTION: | POLYETHYLENE CATCH BASIN SOLIDS INTERCEPTOR WITH H2O RATED PICKABLE CAST IRON COVERS |
| DWG BY: ENG | DATE: 3/5/2026 |
| REV: 2 | |

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

