

**SPECIFICATIONS**


1. 4" Plain End inlet/outlet, H20 traffic-rated cast iron cover standard.
2. Liquid capacity: 57 Gallons.
3. Solids capacity: 25 Gallons.
4. Unit weight w/ standard cover: 153 lbs.
5. Maximum operating temperature 140°F continuous.

**NOTES**


1. For gravity drainage applications only.
2. Do not use for pressure applications.
3. Cover placement allows full access to tank for proper maintenance.
4. Narrow footprint allows clearance through doorways and down stairs.
5. Diptube is removable to inspect or clean piping.
6. Maximum burial depth: 39" from standard cover height.

**ENGINEER SPECIFICATION GUIDE**


Striem solids interceptor model CB-50-S shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Interceptor liquid holding capacity shall be 57 gallons and solids capacity shall be 25 gallons. Cover shall be H20 traffic-rated pickable cast iron.

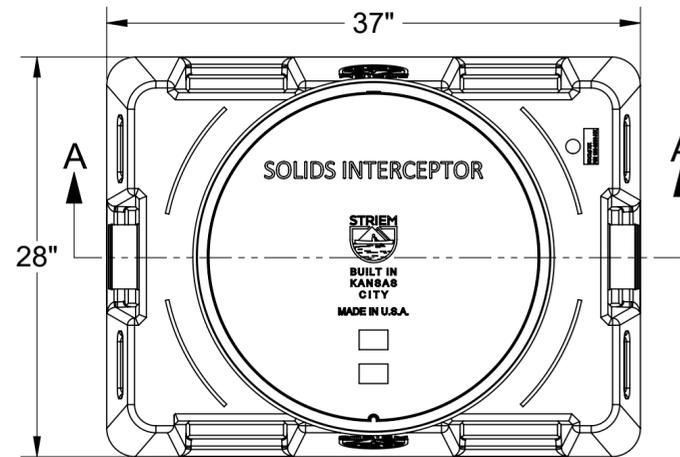


**TOP VIEW**

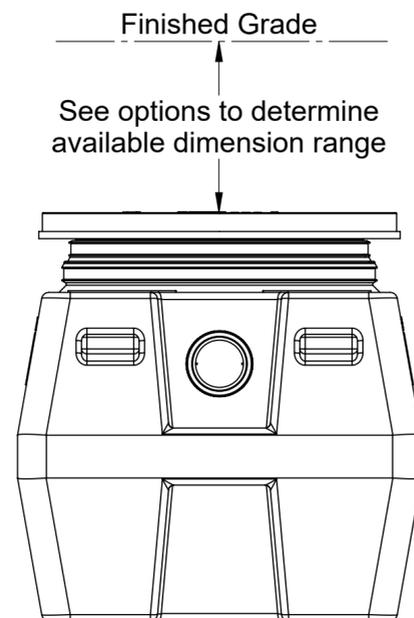

**END VIEW**

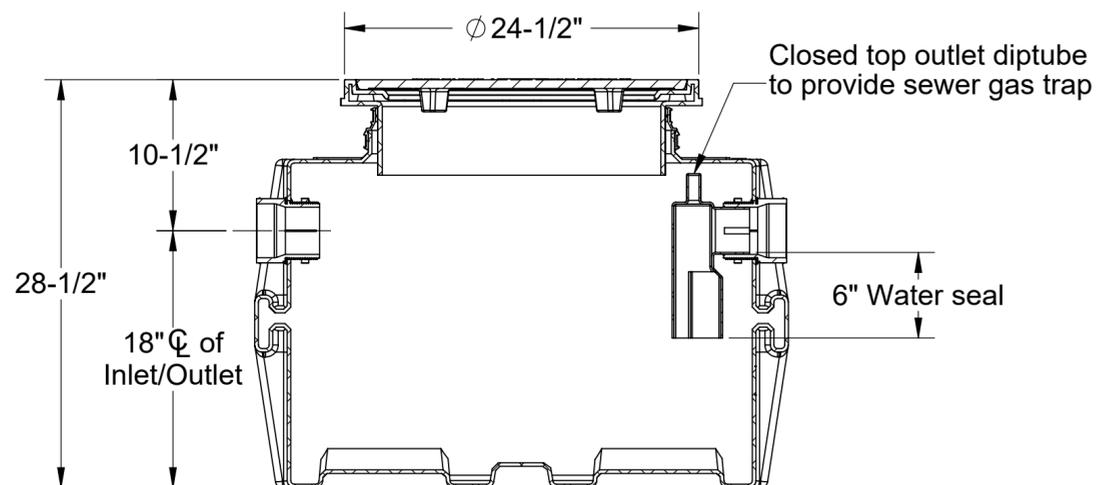

**SECTION A-A**

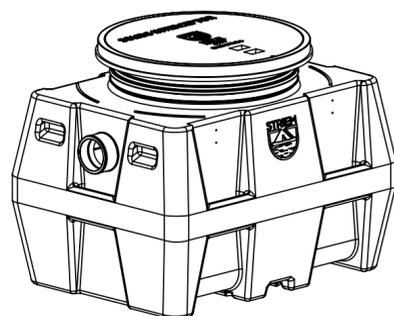

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

**OPTIONS**

**Connection Options (Plain End Only)**

**Inlet / Outlet**

- 3"
- 4"

**Riser Options**

**From Factory: Up to 5"**

- Up to 24": **SR24**
- Up to 39": **LR24**

**Additional Options**

- C24-M:** 2,000 lbs. Rated Bolted Composite Cover
- HDK-2:** High Water Table Hold Down Kit

**MODEL NUMBER:** CB-50-S

**DESCRIPTION:**  
 POLYETHYLENE CATCH BASIN

**DWG BY:** ENG    **DATE:** 2/23/2026    **REV:** 2

**SPECIFICATION SHEET**

Striem  
 Kansas City, KS  
 Tel: 913-222-1500  
 orders@striemco.com  
 www.striemco.com

Made in the U.S.A

