

SPECIFICATIONS


1. 4" Plain End inlet/outlet, 4" Plain End vents, H20 traffic-rated cast iron covers standard.
2. Max flow rate: 100 GPM.
3. Liquid capacity: 250 gallons (33.4 cu. ft.)
4. Oil capacity: 50 gallons.
5. Solids capacity: 160 gallons.
6. Unit weight w/ standard covers: 345 lbs.
7. Maximum operating temperature 140 °F continuous.

NOTES

1. For gravity drainage applications only.
2. Do not use for pressure applications.
3. Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
4. Narrow footprint allows clearance through doorways and down stairs.
5. Cover placement allows full access to tank for proper maintenance.
6. Maximum burial depth: 90" from standard cover height.

ENGINEER SPECIFICATION GUIDE

Striem oil separator model OS-100-OMAHA shall be lifetime guaranteed and made in the USA. Separator shall be constructed of polyethylene. Separator shall be manufactured for above- or below-grade installation, Field-adjustable riser system is available as an option to bring manhole covers to grade. Separator flow rate shall be 100 GPM. Separator liquid holding capacity shall be 250 gallons and oil capacity shall be 50 gallons. Solids capacity shall be 160 gallons. Covers shall be H20 traffic-rated pickable cast iron.

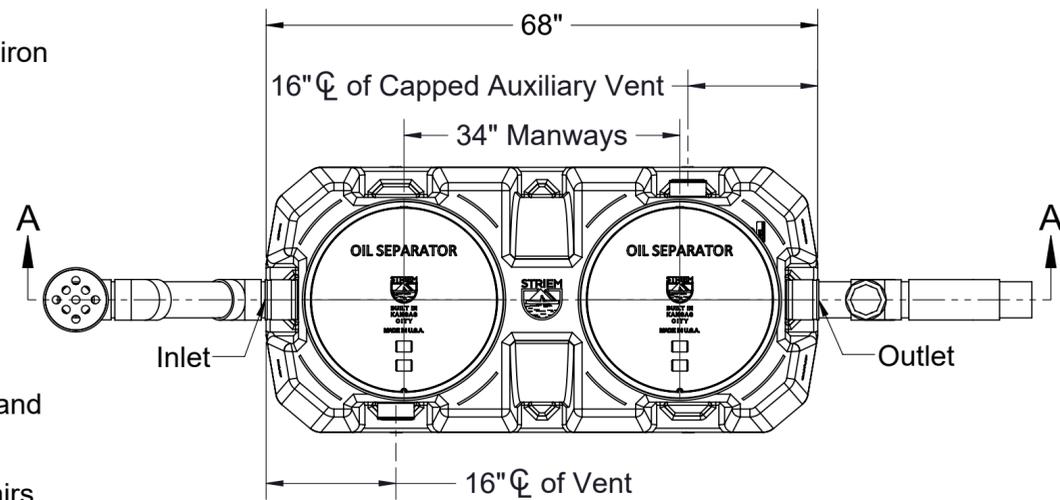

TOP VIEW

OPTIONS

Riser Options

From Factory: Up to 5"

- Up to 24": **SR24** (2)
- Up to 39": **LR24** (2)
- Up to 43": **SR24** (4)
- Up to 58": **SR24** (2) + **LR24** (2)
- Up to 72": **LR24** (4)
- Up to 90": **SR24** (2) + **LR24** (4)


-OR-

- CPRK** (2): 11" - 90" (See specification for more detail.)


Additional Options

- HDK-2:** High Water Table Hold Down Kit
- C24-M** (2): 2,000 lbs. Rated Bolted Composite Covers

Finished Grade
See options to determine available dimension range

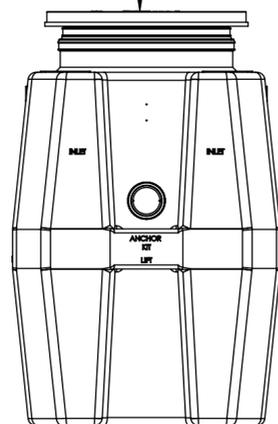

END VIEW

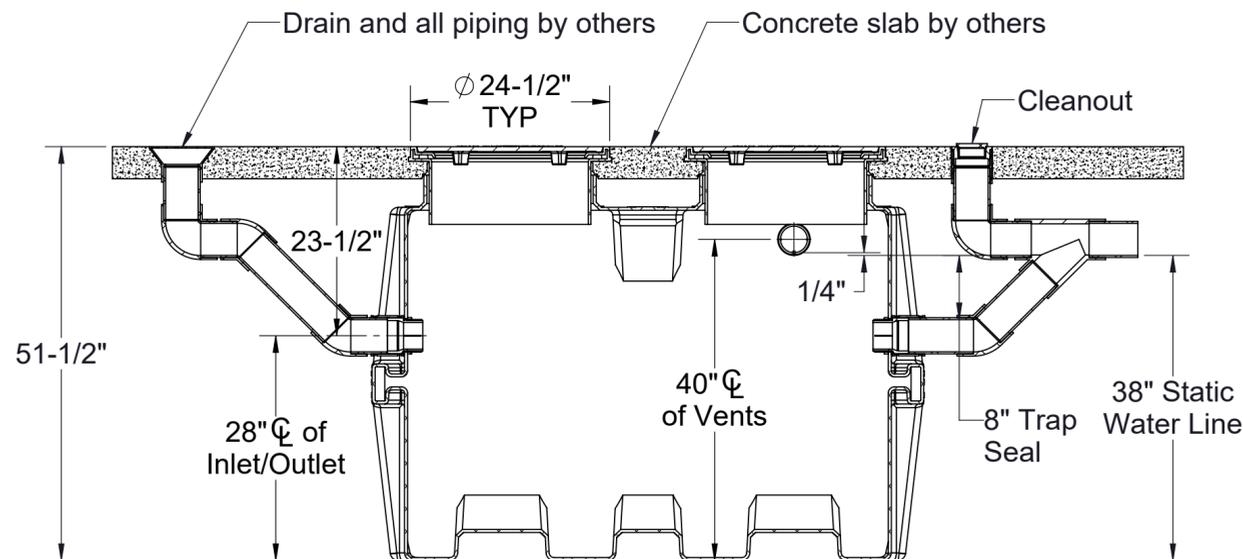

SECTION A-A



PO IS NON-CANCELABLE ORDER IS NON-RETURNABLE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER: OS-100-OMAHA

DESCRIPTION:
OMAHA TYPE 1 & 2 INTERCEPTOR

DWG BY: ENG **DATE:** 3/3/2026 **REV:** 2

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

