

SPECIFICATIONS


1. 4" Plain End inlet/outlet, C24-M cover standard.
2. Max flow rate: 50 GPM.
3. Liquid capacity: 57 Gallons.
4. Solids capacity: 29 Gallons.
5. Unit weight w/ standard cover: 103 lbs.
6. Maximum operating temperature 140°F continuous.

NOTES


1. For gravity drainage applications only.
2. Do not use for pressure applications.
3. Cover placement allows full access to tank for proper maintenance.
4. Removable filter screen for easy maintenance.
5. Maximum burial depth: 39" from standard cover height.

ENGINEER SPECIFICATION GUIDE


Striem solids interceptor model PS-50-S shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of polyethylene. Interceptor shall be manufactured for above- or below-grade installation. Field-adjustable riser system is available as an option to bring manhole cover to grade. Interceptor shall have corrosion-resistant removable filter screen with 1/4" perforations. Interceptor liquid holding capacity shall be 57 gallons and solids capacity shall be 29 gallons. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs. load capacity.

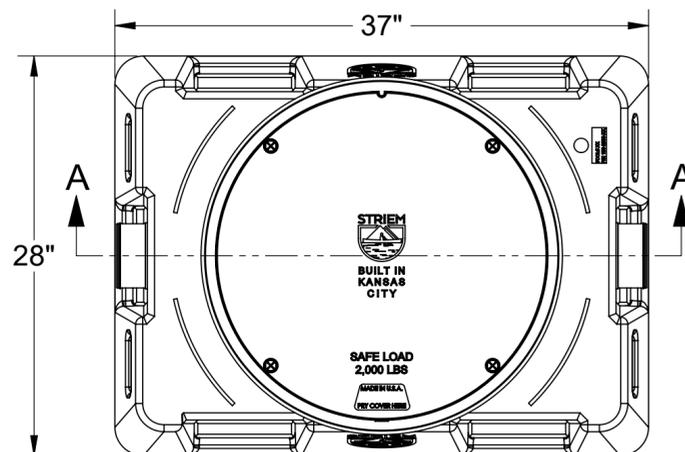


TOP VIEW

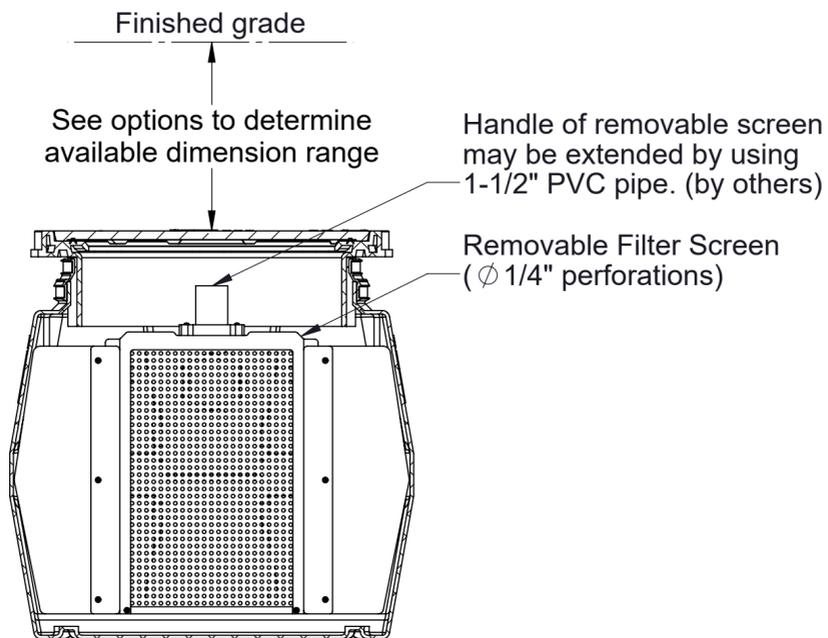

SECTION B-B

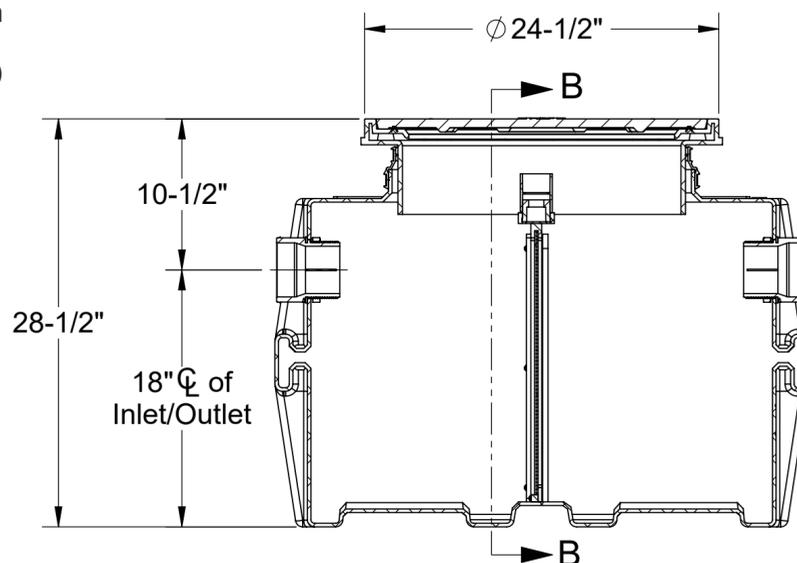

SECTION A-A

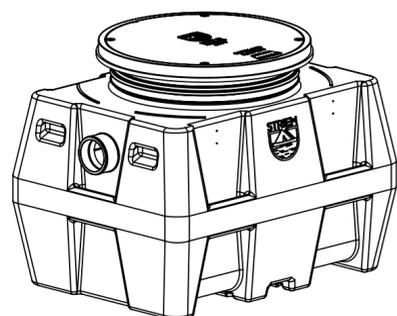

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet

- 2"
- 3"
- 4"

Riser Options

From Factory: Up to 5"

- Up to 24": **SR24**
- Up to 39": **LR24**

Additional Options

- HDK-2:** High Water Table Hold Down Kit
- C24-HP:** H20 Traffic-Rated Pickable Cast Iron Cover

MODEL NUMBER: PS-50-S	
DESCRIPTION: POLYETHYLENE SCREEN STYLE SOLIDS INTERCEPTOR 57 LIQUID GALLON CAPACITY	
DWG BY: ENG	DATE: 3/5/2026
REV: 3	

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

