

SPECIFICATIONS

1. 4" Plain End inlet/outlet, C24-M cover standard.
2. Unit weight: 51 lbs.
3. Maximum operating temperature 140°F continuous.

4. NOTES

1. For above- or below-grade installation of the CC-1 Command Center pH probe.
2. For gravity drainage applications only.
3. Do not use for pressure applications.
4. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs. load capacity.
5. Handle may be extended using 1-1/2" PVC pipe by others.
6. pH probe with 10' of wire & control panel with 50' of wire included with CC-1.
7. Maximum burial depth: 103" from standard cover height.

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet

- 4"
- 6"

Riser Options

From Factory: Up to 2"



- Up to 21": **SR24**
- Up to 36": **LR24**
- Up to 40": **SR24 (2)**
- Up to 55": **SR24 + LR24**
- Up to 69": **LR24 (2)**
- Up to 87": **SR24 + LR24 (2)**
- Up to 103": **LR24 (3)**

- OR -

- CPRK: 11" - 103"** (See specification for more detail.)

Additional Options

- C24-HP: H20 Traffic-Rated Pickable Cast Iron Cover**

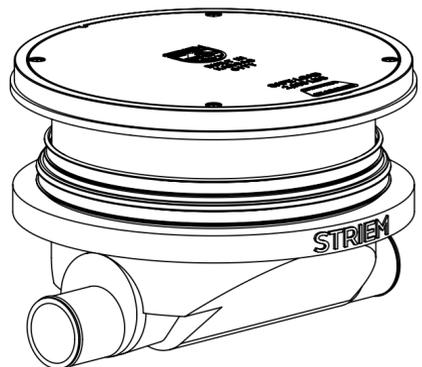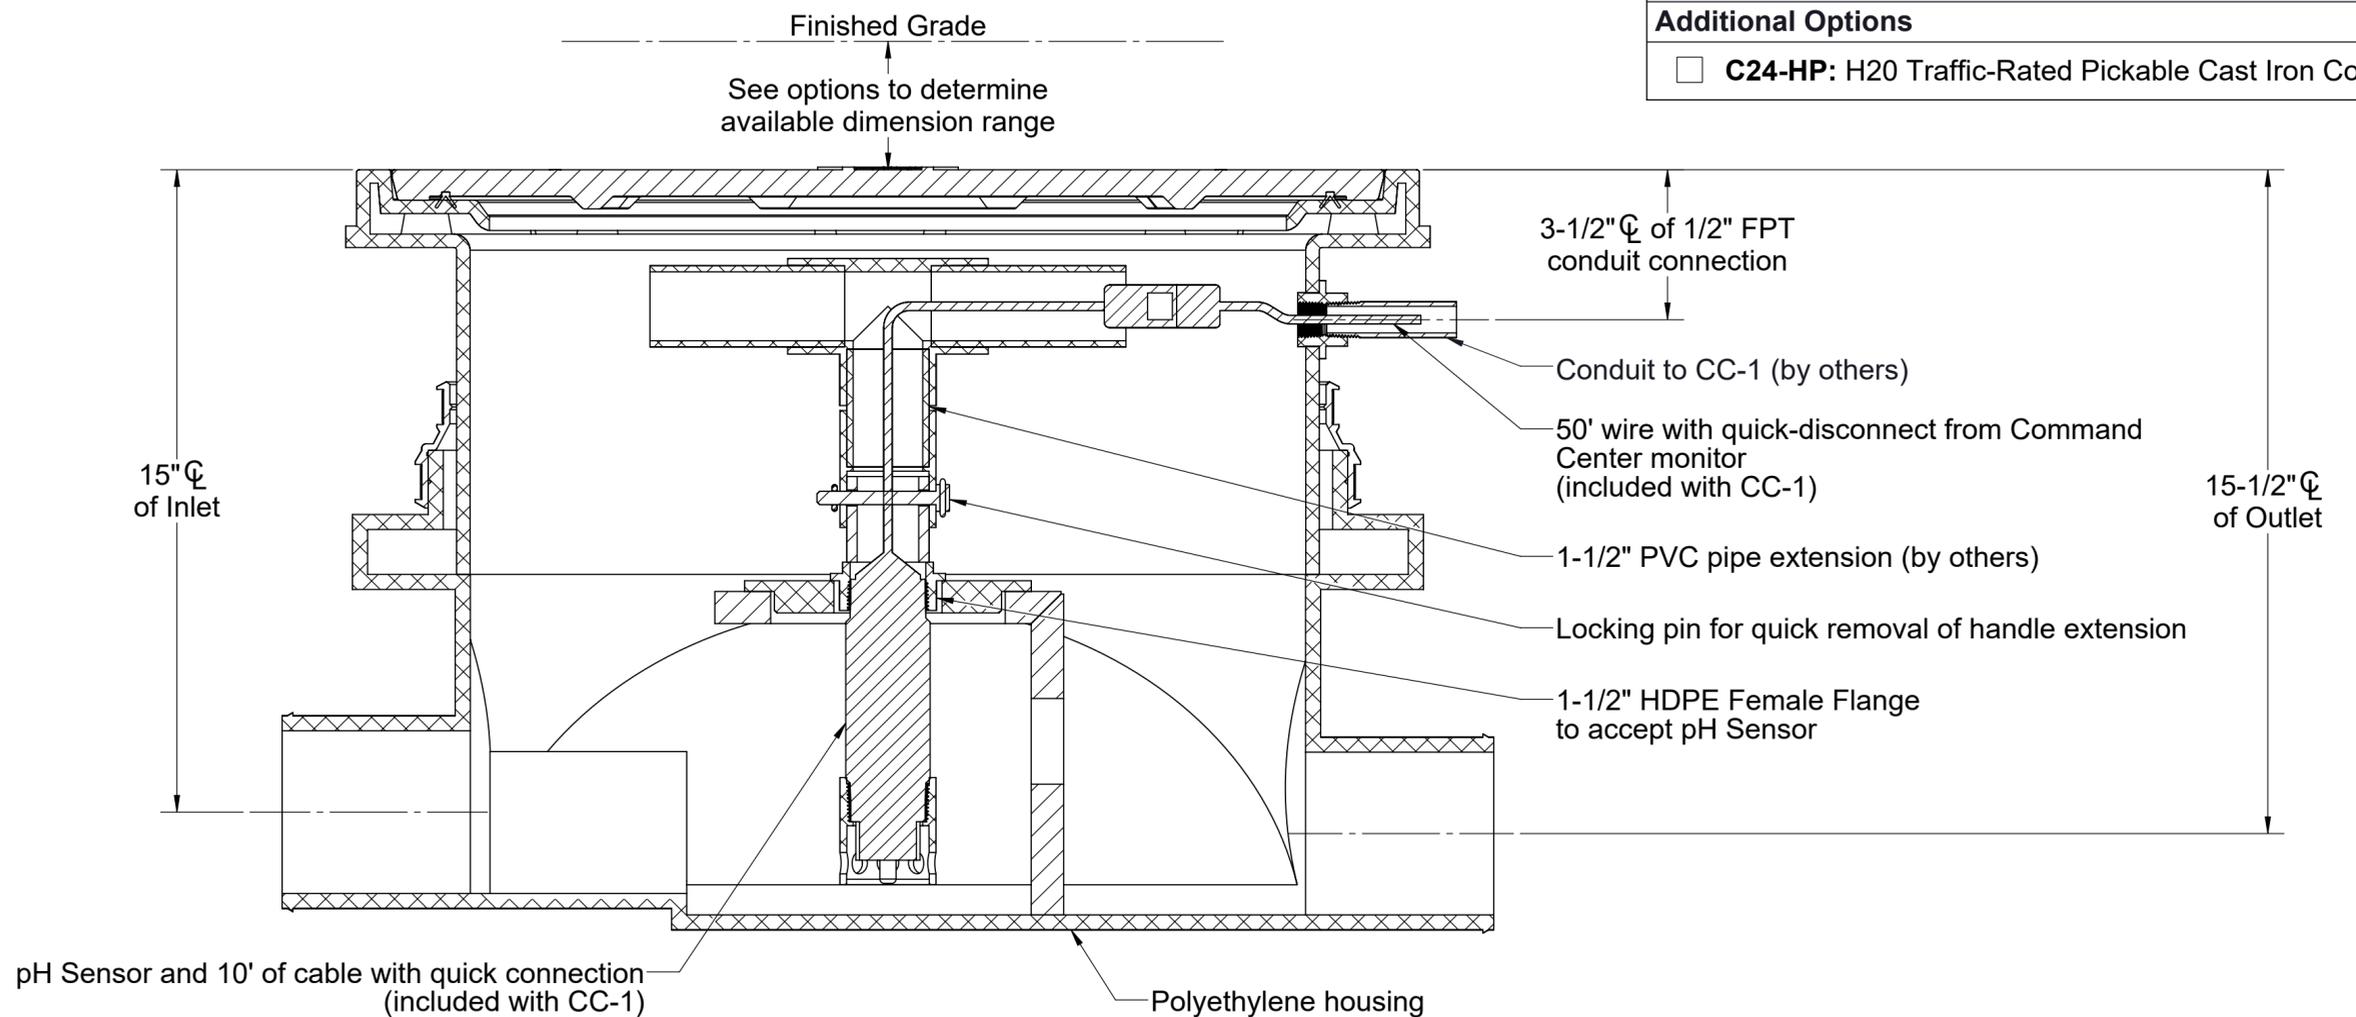

**PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE**

MODEL NUMBER:	SPK
DESCRIPTION:	SENSOR PLACEMENT KIT FOR COMMAND CENTER™ pH MONITORING SYSTEM
DWG BY:	ENG
DATE:	3/5/2026
REV:	1

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

